

Job Name: 26-1310 Lodges of Prospect Ph.2
Job Location: Prospect, KY 40059
Contractor: Trademark Excavating

Plant: 100

7/13/2026 2:34:06 PM

Tech: Jared - A

PC: Thomas Ryan



Structure ID: 4-4 ST-DCB

P2 MH048LD06SP

MH FLAT TOP SPEC. HT. (6") w/24"x36" Hole F/F

- P3) 24" x 36" - CASTING HEIGHT - 4"
P2) 48" - MH FLAT TOP SPEC. HT. (6") w/24"x36" Hole F/F - 6"
P1) 48" - MH BASE Custom Ht F/n - 24"
1) CASTING - HOE 518 F/G
1) 48" - Conseal CS-102 1.00"
1) 24" x 36" - Conseal CS-102 1.00"
1) Hole - 20
3) Hole - 16

Structure Total:


- 0 lb
895 lb
2587 lb
354 lb
0 lb
0 lb
0 lb
0 lb

3836 lb
- Structure Notes:**
PLAN LABEL: 4
1. HOE 518 F/G PROVIDED BY ICAST.
2. PER ASTM C478 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
5. STEEL DIVERSION WEIR PLATE TO BE SUPPLIED BY OTHERS

NOTES:


1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" C.C. E.W. (GRADE 60).

24" X 36" OPENING AS SHOWN.

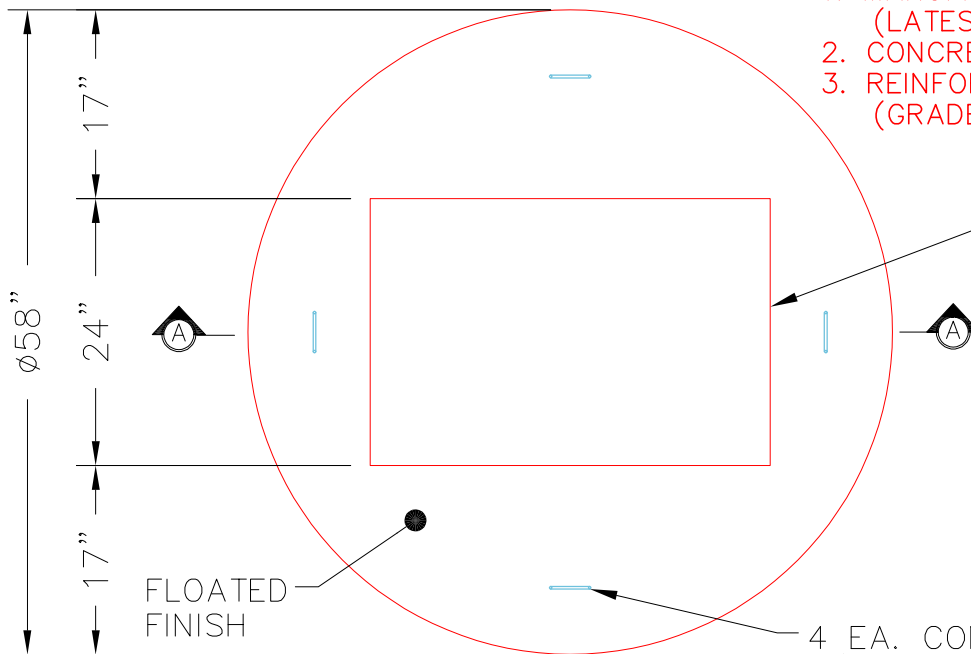

PLAN VIEW

4 EA. CONAC .8 TON
8¹/₁₆" (6MM) WIRE ROPE
ANCHORS FOR HANDLING

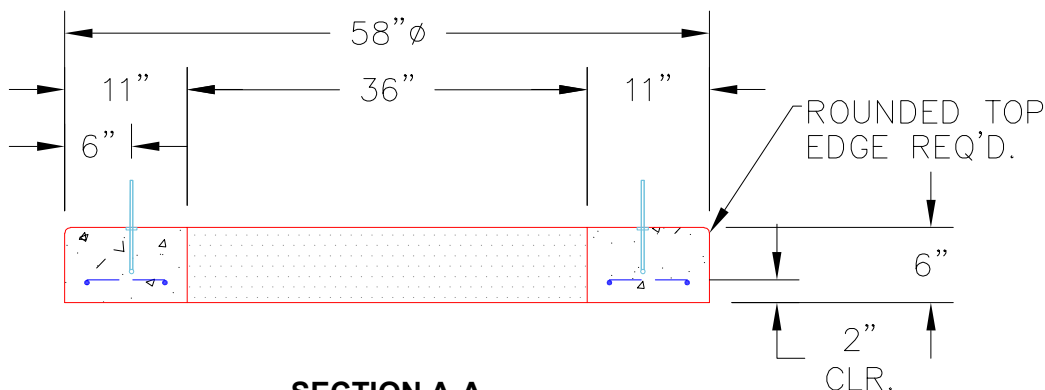

SECTION A-A

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 5"

Height (Ext): 6"

Weight (Net): 895 lb
Volume (Net): 0.23cu.yd