



Job Name: 26-1322 - KYTC Warren Co (261503) Job Location: Bowling Green, KY Contractor: Mick-Murf Construction Inc.					Plant: 100 9/7/2026 11:06:01 AM		Tech: Jared - F PC: C. Goff				
Structure ID: 10-20 CBIA											
P1		BX2436-08BVF									
BOX BASE 8inW, 8inF, Variable Ht T/n											
P3) 24" x 120" - CB INLET KY A 10' TOP LEFT F/G - 10" P2) 24" x 120" - CB INLET KY A 10' BOTTOM LEFT T/G - 18" P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht T/n - 37" 1) CASTING - HOE KY-206 F/C (KY CBI A) 1) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 18"						3400 lb 5270 lb 4830 lb 206 lb 0 lb 0 lb		Structure Notes: ** KYTC STATE PROJECT ** 1. PER KYTC CBI TYPE A / ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY -206 F/C (KY CBI A))			
Structure Total: 13706 lb						REINFORCING PER ASTM A615 (GRADE 60). - TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W. - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 536.51' Rim to Invert: 5.73' Slack: 3.76" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	530.78'	0°	20"	15" CMP	16"	Hole 18	18"	18"	-1.5"	0"	
Invert 2	530.84'	180°	20"	15" CMP	16"	Hole 18	18"	18"	-0.75"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

RIGHT-SIDE UP VIEW (int. dimensions)

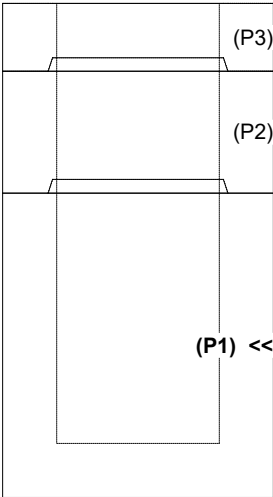

(P3)
(P2)
(P1) <<


UPSIDE-DOWN VIEW (int. dimensions)



Invert: 2
Degree: 180°
Horz: 12"
Hole: 18"
Up(): -0.75"

Invert: 1
Degree: 0°
Horz: 12"
Hole: 18"
Up(): -1.5"

INSIDE WALL DIMENSIONS

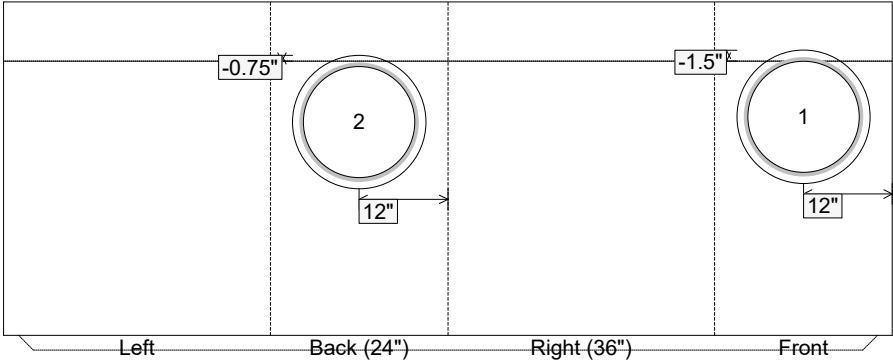

(P1)

Left Back (24") Right (36") Front

EXT

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 37" Height (Ext): 45"	Weight (Net): 4830 lb Volume (Net): 1.23cu.yd
----------------------------------	---------------------------------	--	--	--