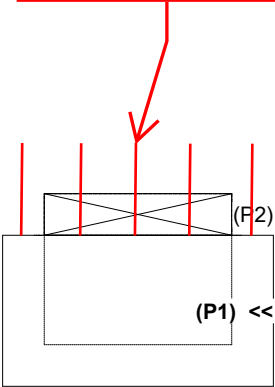
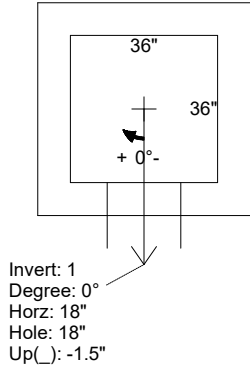
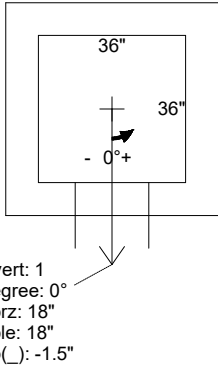
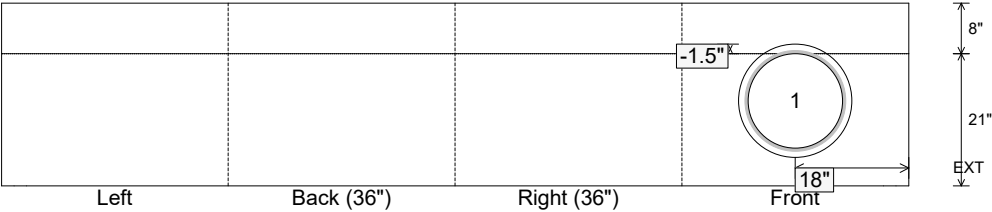


Job Name: 26-1322 - KYTC Warren Co (261503) Job Location: Bowling Green, KY Contractor: Mick-Murf Construction Inc.					Plant: 100 9/7/2026 11:06:02 AM		Tech: Jared - F PC: C. Goff										
Structure ID: 17-21 DBI3																	
P1 BX3636-08BAVF		BOX BASE 8inW, 8inF, Variable Ht F/n															
P2) 36" x 36" - P.I.P. - BY OTHERS - 8" P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 21" 1) 36" x 36" - Conseal CS-102 1.00" 1) Hole - 18						0 lb 4125 lb 0 lb 0 lb ----- Structure Total: 4125 lb		Structure Notes: ** KYTC STATE PROJECT ** 1. PER KYTC DBI TYPE 3 / ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PI AT 28 DAYS. 3. STUB #5 BARS 20" OUT TOP OF WALLS (SPA@12"C/C) 4. CASTING SUPPLIED BY OTHERS (HOE KY-328 SET (DBI 3)). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.									
Rim: 530.88' Rim to Invert: 2.47' Slack: 0.64" Sump: 0" Step Position:																	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset							
Invert 1	528.41'	0°	26"	15" CMP	16"	Hole 18	18"	18"	-1.5"	0"							
Invert 2																	
Invert 3																	
Invert 4																	
Invert 5																	
Invert 6																	
Invert 7																	
Invert 8																	
RIGHT-SIDE UP VIEW (int. dimensions)						UPSIDE-DOWN VIEW (int. dimensions)											
#5 DOWELS @ 12" O.C. STUBBED 20" OUT THE TOP OF THE WALLS 																	
INSIDE WALL DIMENSIONS																	
																	
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 8" Floor Height: 8"		Height (Int): 21" Height (Ext): 29"		Weight (Net): 4125 lb Volume (Net): 1.05cu.yd								