

Structure ID: 155-92 SS-MH

P2 MH048RS48



MH RISER T/G

P4) 24" - CASTING HEIGHT - 7" P3) 48" - ECC CONE w/ 24" HOLE F/G - 42" P2) 48" - MH RISER T/G - 48" P1) 48" - MH BASE (08"F) T/n - 42" 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) JOINT WRAP - 0.065"x6"x50" CONSEAL CS212 1) CASTING - HOE MC-375 F/C BGMU Sanitary 2) 48" - Conseal CS-102 1.00" (Double) 1) Kor-N-Seal1 - S106-20BW 1) PSX - 16L NYLO 10) MH Step ML-10-TDS-NCR - 10"	0 lb 3200 lb 3353 lb 4487 lb 1440 lb 0 lb 0 lb 271 lb 0 lb 6 lb 8 lb 0 lb	Structure Notes: 1. PER KYTC & ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. STEPS AT 0 DEGREES 5. HOE MC-375 FRAME & COVER "BGMU SANITARY" SUPPLIED BY ICAST
Structure Total:		12765 lb

Rim: 533.62' Rim to Invert: 11.51' Slack: 1.62" Sump: 2.5" Step Position: 0°


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

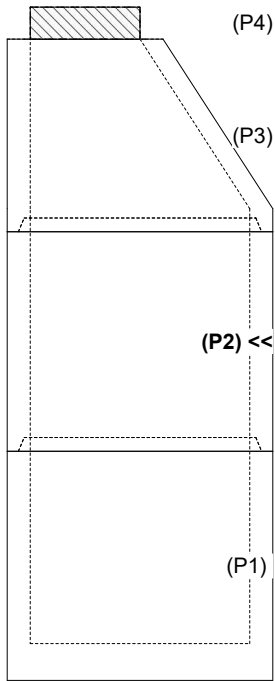

Step: 0°
Horz: 0"

INSIDE WALL DIMENSIONS

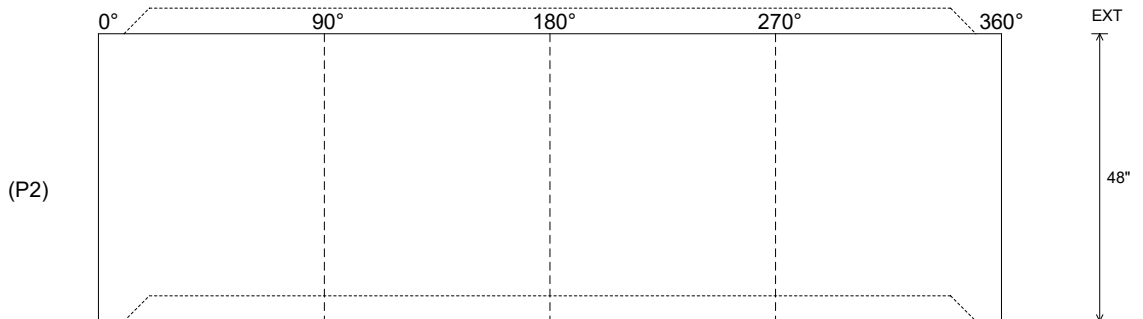

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 48" Height (Ext): 48"	Weight (Net): 3353 lb Volume (Net): 0.86cu.yd
----------------------------------	------------------------------------	--	--	--