

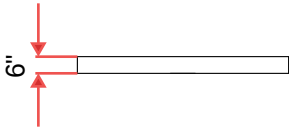
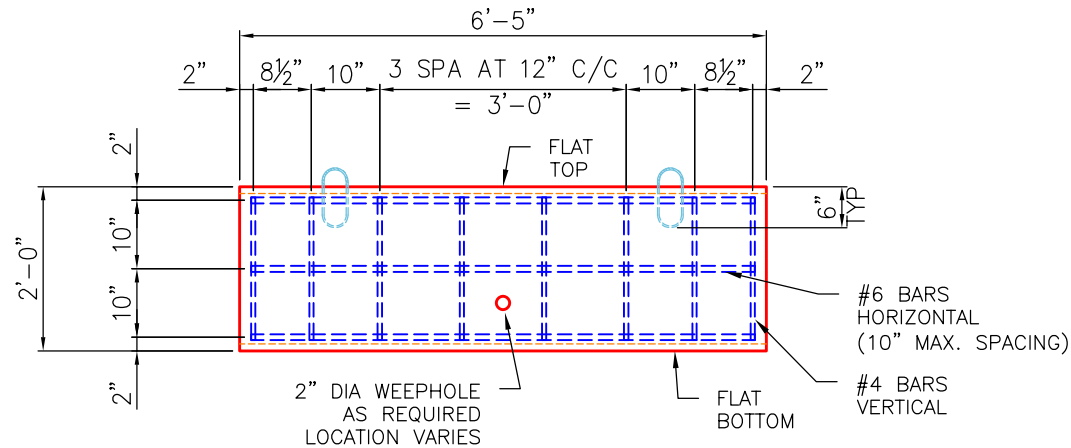


Job Name: 26-1333 - Mitchell Hill Road Project Job Location: Louisville, KY 40118 Contractor: Hall Contracting of Kentucky Inc					Plant: 100 6/16/2026 1:22:09 PM		Tech: J. Horsley PC: J. Jarvis										
Structure ID: WALL P23-P24																	
P1 CUSTOM WALL				WALL PANEL 6" THICK F/F													
P3) 77" x 6" - WALL PANEL 6" THICK F/F - 3.00' HT x 6.42' LONG P2) 77" x 6" - WALL PANEL 6" THICK F/F - 2.00' HT x 6.42' LONG P1) 77" x 6" - WALL PANEL 6" THICK F/F - 2.00' HT x 6.42' LONG 1) Hole - 2					1398 lb 932 lb 932 lb0 lb Structure Total: 3261 lb		Structure Notes: . 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETER = 4,000 PSI AT 28" DAYS. 3. SMOOTH FORM FINISH ON THE FRONT SURFACE. 4. 3/4" CHAMFER ON ALL LONG EDGES. REINFORCING PER ASTM A615 (GRADE 60). -VERTICAL BARS = #4 BARS AT 12" C/C -HORIZONTAL BARS = #6 BARS EQUALLY SPACED (10" MAX.)										
Rim: 691' Rim to Invert: 1.5' Slack: 0" Sump: 66" Step Position:																	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset							
Invert 1																	
Invert 2																	
Invert 3																	
Invert 4																	
Invert 5																	
Invert 6																	
Invert 7																	
Invert 8																	
(P3) (P2) (P1) << RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimensions) Note: See attached typical drawing for reinforcing and lifting details. INSIDE WALL DIMENSIONS (P1) 6'-5" (77") EXT 24" <table><tr><td colspan="2">Coating (Int): Coating (Ext):</td><td>Seam Up: Flat Seam Dn: Flat</td><td>Wall Thickness: 0" Floor Height: 0"</td><td>Height (Int): 24" Height (Ext): 24"</td><td>Weight (Net): 932 lb Volume (Net): 0.24cu.yd</td></tr></table>												Coating (Int): Coating (Ext):		Seam Up: Flat Seam Dn: Flat	Wall Thickness: 0" Floor Height: 0"	Height (Int): 24" Height (Ext): 24"	Weight (Net): 932 lb Volume (Net): 0.24cu.yd
Coating (Int): Coating (Ext):		Seam Up: Flat Seam Dn: Flat	Wall Thickness: 0" Floor Height: 0"	Height (Int): 24" Height (Ext): 24"	Weight (Net): 932 lb Volume (Net): 0.24cu.yd												

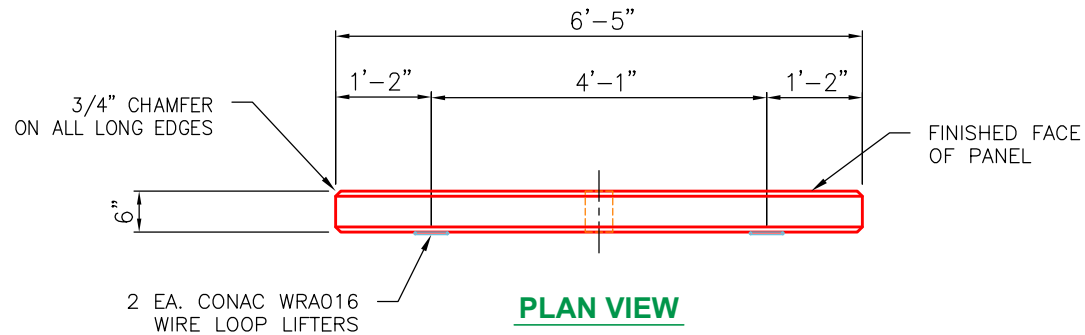

SIDE VIEW

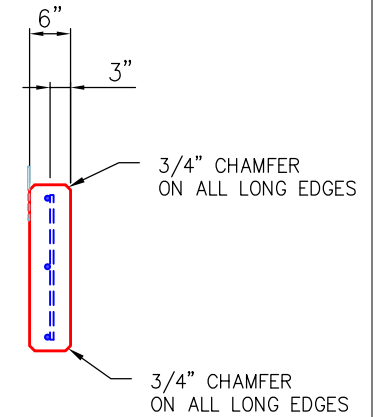

END VIEW

GENERAL NOTES:

1. MANUFACTURED ASTM C913 SPECIFICATIONS.
2. CONCRETE: 4,000 PSI MINIMUM AT 28 DAYS.
3. REINFORCING: AS PER PLAN DESIGN (GRADE 60).
4. CONAC 5CA14 ANCHORS CAST IN FOR HANDLING.
5. WEIGHT = 914 LBS
6. 21 REQUIRED.

REVISION INFORMATION	
REV.  DATE:	NO REVISIONS TO DATE



SUBMITTAL DESCRIPTION: WALL PANEL 6.50' LG x 6" THK.		
CUSTOMER: HALL CONTRACTING OF KY INC.		
PROJECT: MITCHELL HILL ROAD PROJECT		
STRUCTURE ID.: WALL PANEL 6" THK (78" LG x 24" HT)		
SALES ORDER NO: 26-1333		
CHECK: B. SMITH	DRAWN BY: J. HORSLEY	
DATE: 04/20/26	SCALE: NTS	PG. 1 of 1