

Job Name: 26-1333B Mitchell Hill Road Project
Job Location: Louisville, KY
Contractor: Hall Contracting of Kentucky Inc

Plant: Beaver Dam
8/13/2026 3:43:05 PM

Tech: S. Felletter
PC: J. Jarvis



Structure ID: STR-2

P2 BX024024-08LD08-14

CB FLAT TOP 8"W (HOE KY-215 F&G) F/F

- P2) 24" x 24" - CB FLAT TOP 8"W (HOE KY-215 F&G) F/F - 8"
P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht F/n - 34"
1) This Structure Includes a Cast-in Item
1) CASTING - HOE KY-215 F/BEEHIVE (DBI 15)
1) 24" x 24" - Conseal CS-102 1.00"
1) Hole - 22


Structure Total:

770 lb
3740 lb
0 lb
317 lb
0 lb
0 lb

4828 lb

Structure Notes:
1. KYTC DBI TYPE 15 / ASTM C913 SPECIFICATIONS
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. DBI-15 F/G CAST INTO TOP SLAB (HOE KY-215 F/G BEEHIVE).

REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- WALLS (As .31) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

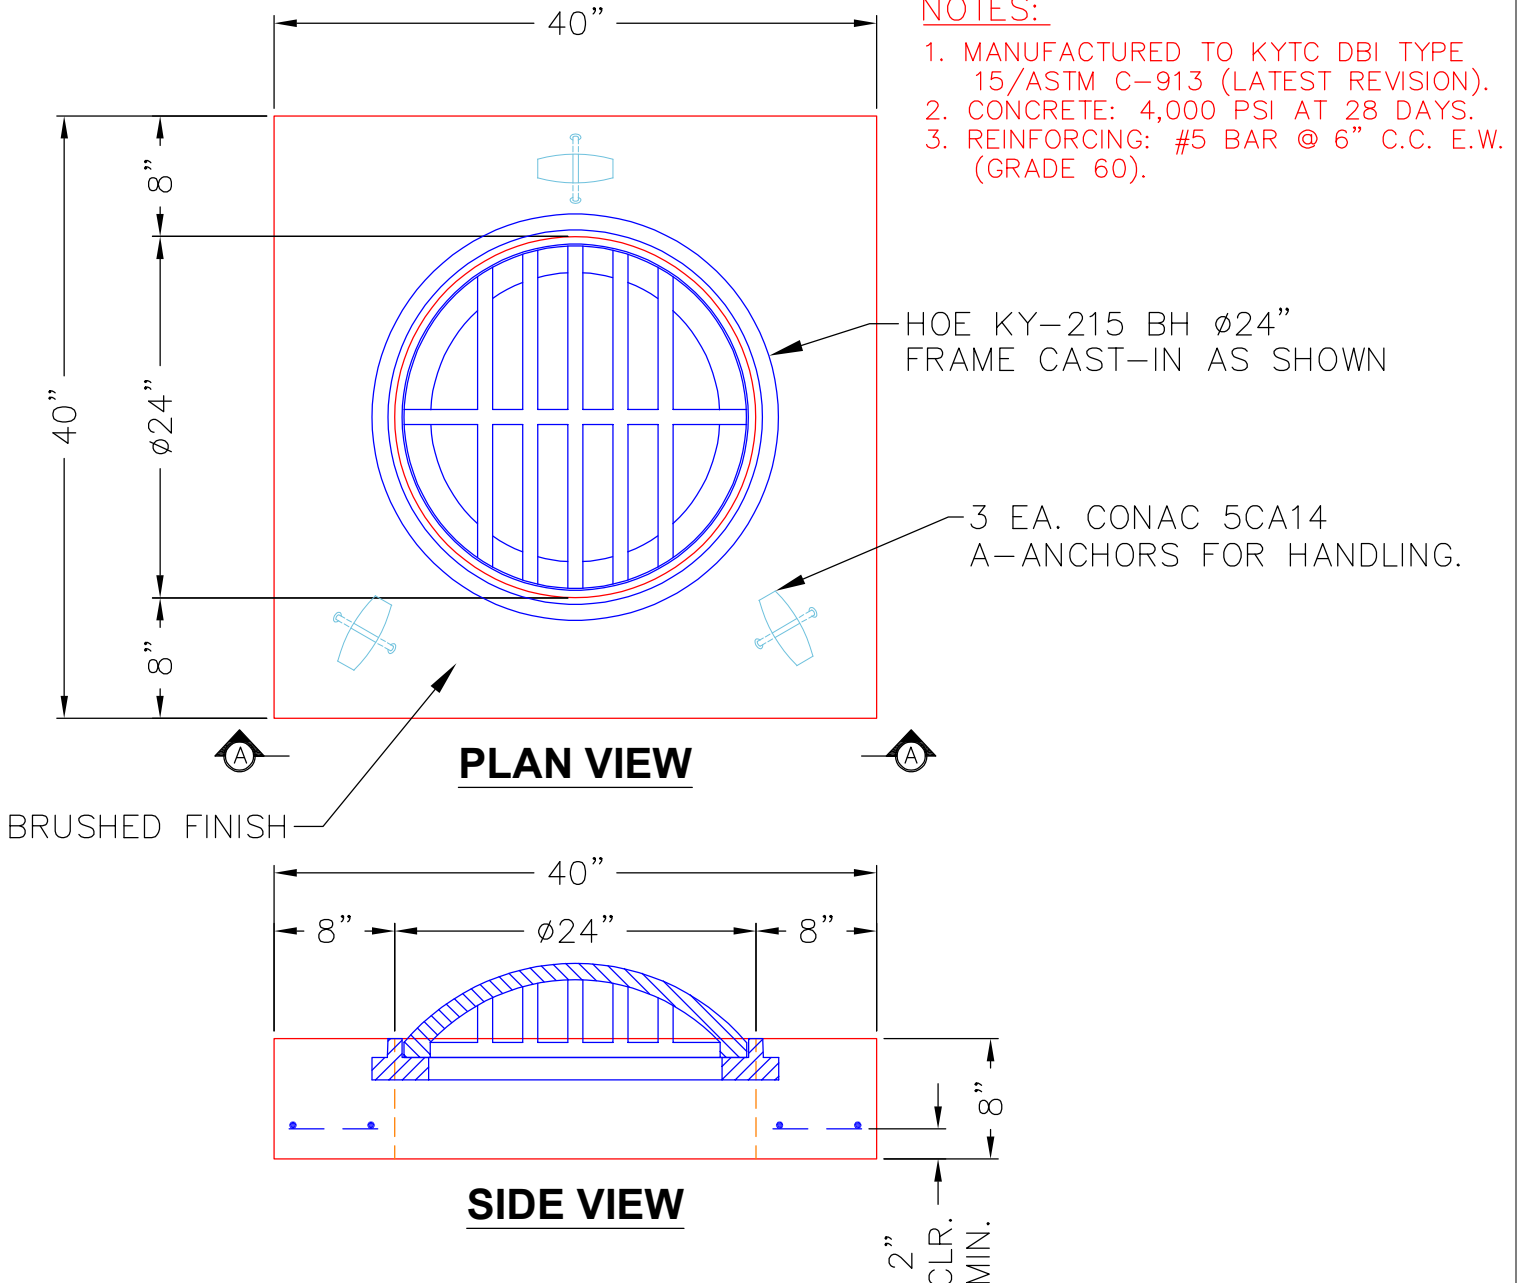

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 770 lb
Volume (Net): 0.2cu.yd