

Job Name: 26-1333B Mitchell Hill Road Project
Job Location: Louisville, KY
Contractor: Hall Contracting of Kentucky Inc

Plant: Beaver Dam
8/13/2026 3:43:04 PM

Tech: S. Felletter
PC: J. Jarvis



Structure ID: STR-4


P2 BX024036-08LD08S

BX FLAT LID 8inW SPEC. (KY JB-B1) F/F

- P3) CASTING (cast in) - 0
P2) 24" x 36" - BX FLAT LID 8inW SPEC. (KY JB-B1) F/F - 8"
P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 41"
1) CASTING - HOE KY-206 F/C (KY TY1)
1) This Structure Includes a Cast-in Item
1) 24" x 36" - SGL 1"x14.5' Butyl
2) Hole - 34
1) Hole - 22

0 lb	Structure Notes:
1093 lb	1. KYTC JUNCTION BOX / PER ASTM C913 SPEC'S.
4106 lb	2. CONCRETE = 4,000 PSI AT 28 DAYS.
206 lb	3. TOP SLAB w KYTC TYPE 1 F/C CAST FLUSH.
0 lb	4. CASTING BY ICAST (HOE KY-206 F/C). CAST-IN.
0 lb	
0 lb	REINFORCING PER ASTM A615 (GRADE 60).
0 lb	- TOP SLAB (As. 62) #5 BARS AT 6" C.C.E.W.
5404 lb	- WALLS (As .31) #5 BARS AT 12" C.C.E.W.
	- FLOOR (As .31) #5 BARS AT 12: C.C.E.W.

- NOTES:
1. MANUFACTURED TO KYTC JUNCTION BOX B1/ASTM C-931 (LATEST REVISION).
 2. CONCRETE: 4,000 PSI AT 28 DAYS.
 3. REINFORCING: #5 BAR @ 6" C.C. E.W. (GRADE 60).
 4. CASTING BY ICAST (HOE KY-206 F/C). CAST-IN.

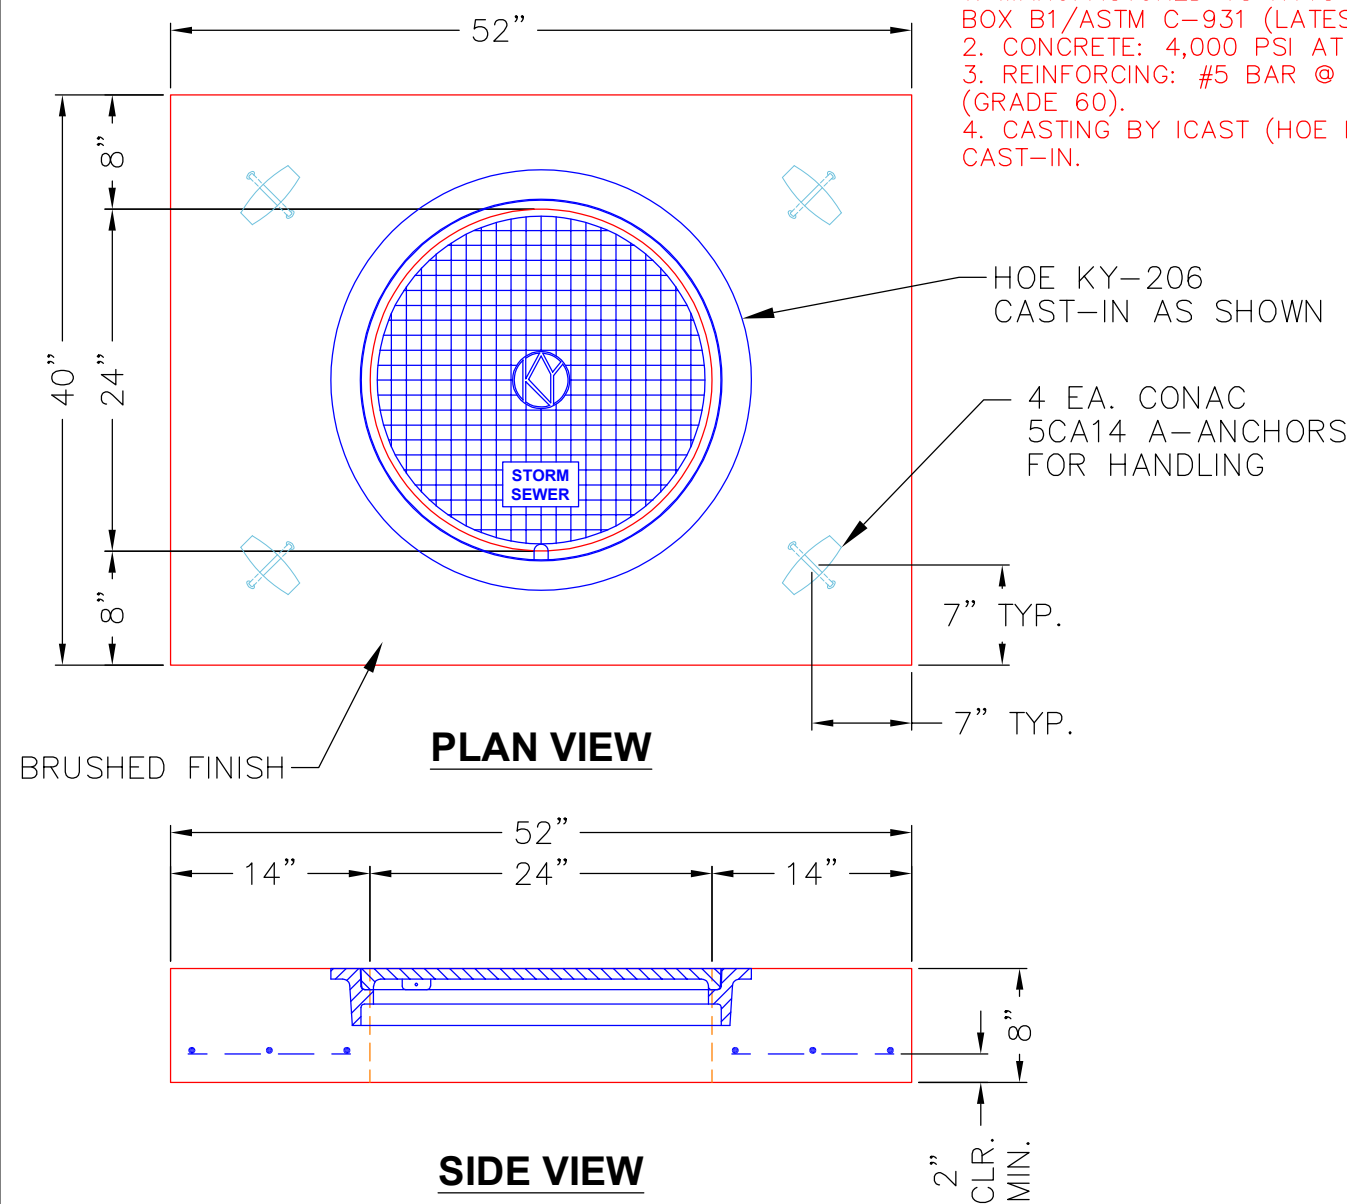

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 8"	Height (Ext): 8"	Weight (Net): 1093 lb Volume (Net): 0.28cu.yd
----------------------------------	--------------------------------	--------------------	------------------	--