




Structure ID: S2-3 HW

P1 HWA15


15" - HW AW w/FOOTER F/F

DIMENSIONS & QUANTITIES


TYPE	PIPE Ø	A	B	C	D	E	F	G	WEIGHT W/TOE	WEIGHT
AW	15"	2'-8"	4'-0"	2'-8"	2'-2"	2'-0"	6"	0"	1,630 LBS.	1,380 LBS.

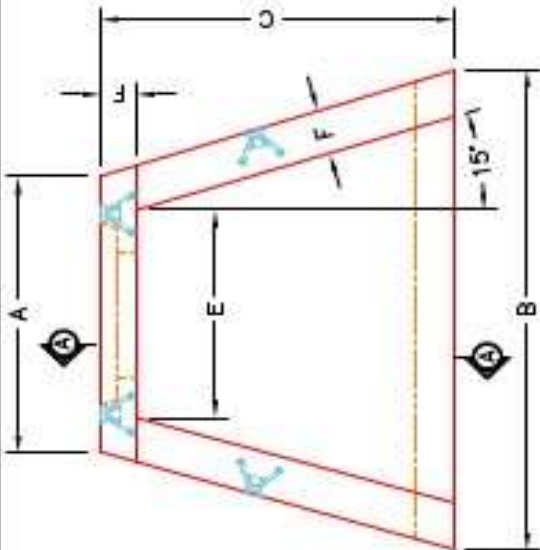

PLAN VIEW

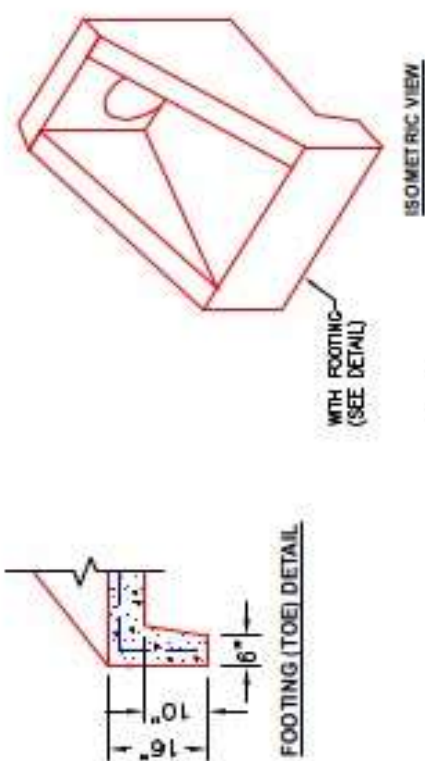

ISOMETRIC VIEW

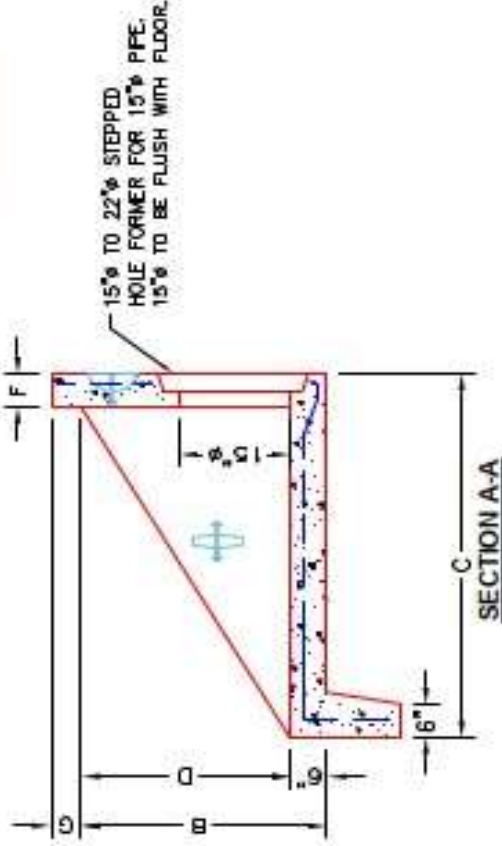

FRONT ELEVATION

NOTES:

1. CONCRETE: 4500 PSI AT 28 DAYS MIN. STRENGTH.
2. REINFORCING: #4 BAR @ 12" C/C E.W.-GRADE 60, (WITH 2" CONCRETE COVER MINIMUM)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.

PRODUCTION WORK ORDER

QUALITY CONTROL CHECKLIST	DESCRIPTION: AW WINGED HEADWALL FOR 15" Ø PIPE
☐ ALL DIMENSIONS CORRECT.	CUSTOMER: STOCK
☐ LIFTERS INSTALLED.	PROJECT: STOCK
☐ STEPPED HF CORRECT SIZE.	STRUCTURE ID.: STOCK
☐ REINFORCING CORRECT.	SALES ORDER NO: T.B.D.
☐ CLEARANCE ON REINFORCING CORRECT.	CHECK: A. WELLS
☐ EDGES CHAMFERED.	DRAWING: N. RICHARDS
☐ ALL PATCHWORK ACCEPTABLE.	DATE: 04/06/23
	SCALE: NTS
	PG. 1 of 1

