




Structure ID: S5-6 HW


P1 HWA15

15" - HW AW w/FOOTER F/F


DIMENSIONS & QUANTITIES									
TYPE	PIPE Ø	A	B	C	D	E	F	G	WEIGHT W/TOE
AW	15"	2'-8"	4'-0"	2'-8"	2'-2"	2'-0"	6"	0"	1,630 LBS.
									1,380 LBS.

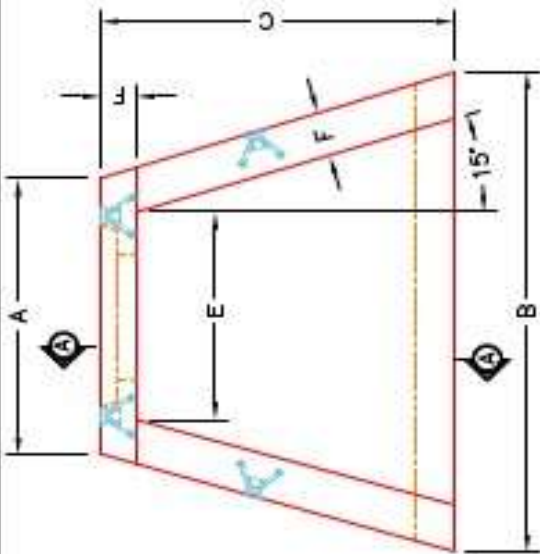

PLAN VIEW

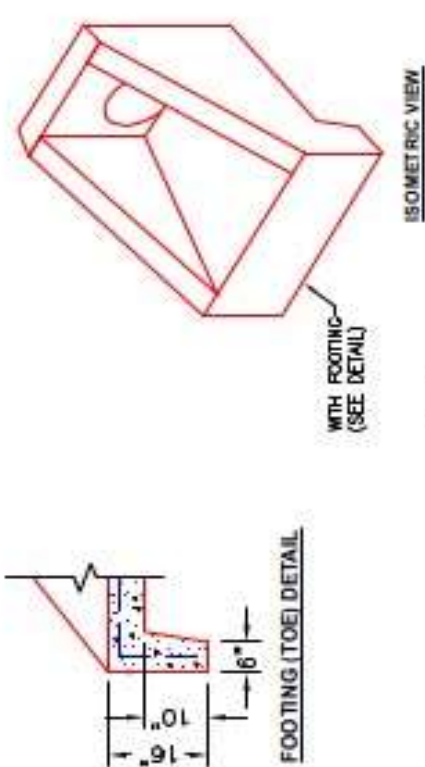

ISOMETRIC VIEW

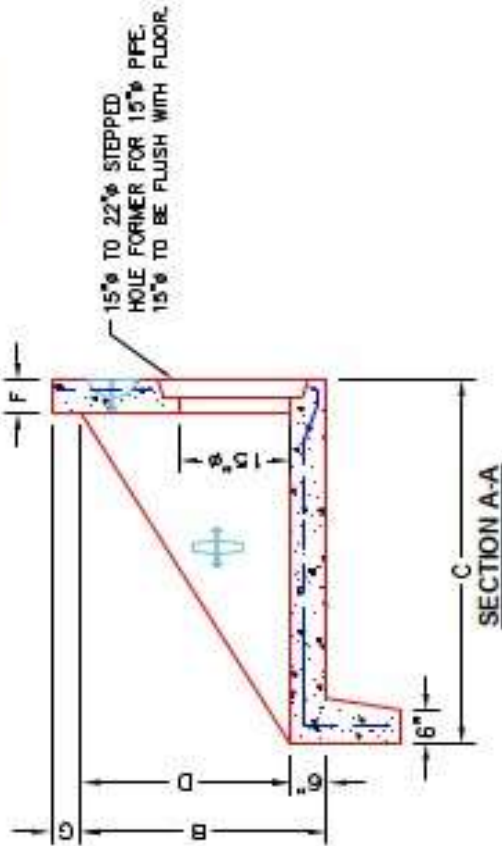

FRONT ELEVATION

~NOTES:

1. CONCRETE: 4500 PSI AT 28 DAYS MIN. STRENGTH.
2. REINFORCING: #4 BAR @ 12" C/C E.W.-GRADE 60, (WITH 2" CONCRETE COVER MINIMUM)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.

PRODUCTION WORK ORDER		PRODUCT I.D.: HWA15	DESCRIPTION: AW WINGED HEADWALL FOR 15" Ø PIPE
QUALITY CONTROL CHECKLIST ☐ ALL DIMENSIONS CORRECT. ☐ LIFTERS INSTALLED. ☐ STEPPED HF CORRECT SIZE. ☐ REINFORCING CORRECT. ☐ CLEARANCE ON REINFORCING CORRECT. ☐ EDGES CHAMFERED. ☐ ALL PATCHWORK ACCEPTABLE.	PRODUCT VIEW: RIGHT SIDE UP	CUSTOMER: STOCK	
	PLANT: BEAVER DAM, KY.	PROJECT: STOCK	
	WEIGHT: 1,630 LBS.	STRUCTURE ID.: STOCK	
	TOP SECTION JOINT: N/A	SALES ORDER NO: T.B.D.	
	BASE SECTION JOINT: N/A	CHECK: A. WELLS	DRAWING: N. RICHARDS
	QC CHECK INITIALS:	DATE: 04/06/23	SCALE: NTS PG. 1 of 1

