




Structure ID: S6-7 HW


P1 HWA15

15" - HW AW w/FOOTER F/F


DIMENSIONS & QUANTITIES									
TYPE	PIPE Ø	A	B	C	D	E	F	G	WEIGHT W/TOE
AW	15"	2'-8"	4'-0"	2'-8"	2'-2"	2'-0"	6"	0"	1,630 LBS.
									1,380 LBS.

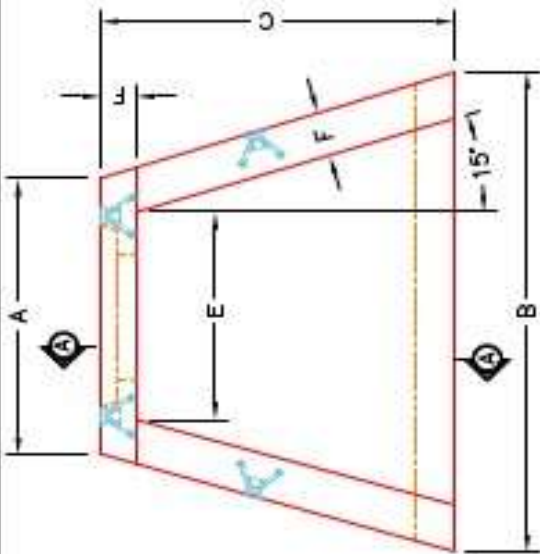

PLAN VIEW

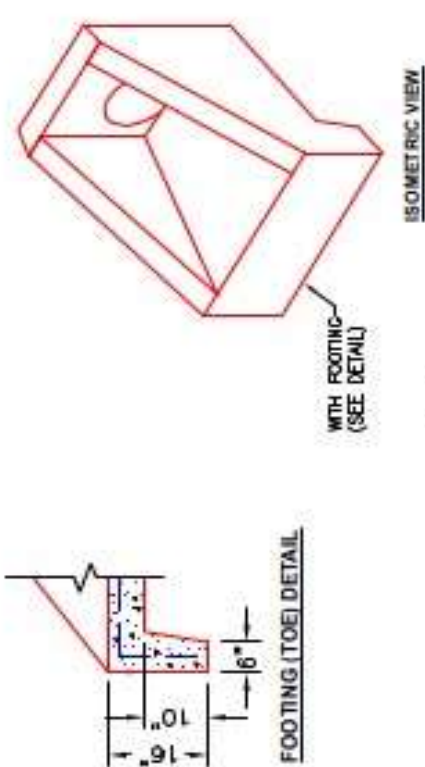

ISOMETRIC VIEW

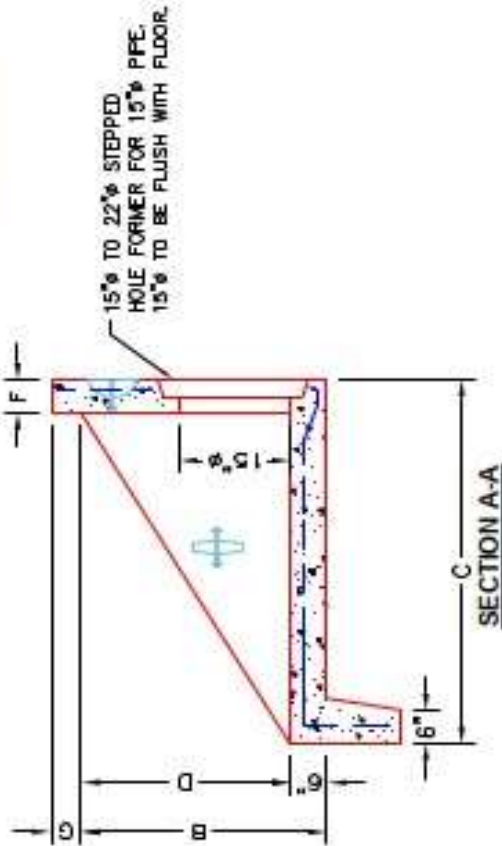

FRONT ELEVATION

~NOTES:

1. CONCRETE: 4500 PSI AT 28 DAYS MIN. STRENGTH.
2. REINFORCING: #4 BAR @ 12" C/C E.W.-GRADE 60, (WITH 2" CONCRETE COVER MINIMUM)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.

PRODUCTION WORK ORDER

QUALITY CONTROL CHECKLIST	
☐	ALL DIMENSIONS CORRECT.
☐	LIFTERS INSTALLED.
☐	STEPPED HF CORRECT SIZE.
☐	REINFORCING CORRECT.
☐	CLEARANCE ON REINFORCING CORRECT.
☐	EDGES CHAMFERED.
☐	ALL PATCHWORK ACCEPTABLE.



PRODUCT I.D.: HWA15	DESCRIPTION: AW WINGED HEADWALL FOR 15" Ø PIPE
PRODUCT VIEW: RIGHT SIDE UP	CUSTOMER: STOCK
PLANT: BEAVER DAM, KY.	PROJECT: STOCK
WEIGHT: 1,630 LBS.	STRUCTURE ID.: STOCK
TOP SECTION JOINT: N/A	SALES ORDER NO: T.B.D.
BASE SECTION JOINT: N/A	CHECK: A. WELLS
QC CHECK INITIALS:	DRAWING: N. RICHARDS
	DATE: 04/06/23
	SCALE: NTS
	PG. 1 of 1