

Contractor: Kauffeld Brothers Construction

Plant: Beaver Dam



Slack: 0"


- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

1) Hole - 20

Structure Total: 7072 lb

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (↓)	Ref
Rim	766.6'							
Reducer								
Invert 1	760.6'	250°	15" HDPE	17.6"	20"	Hole 20	-2.5"	P1
Invert 2								
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

Default - Interior Dimensions

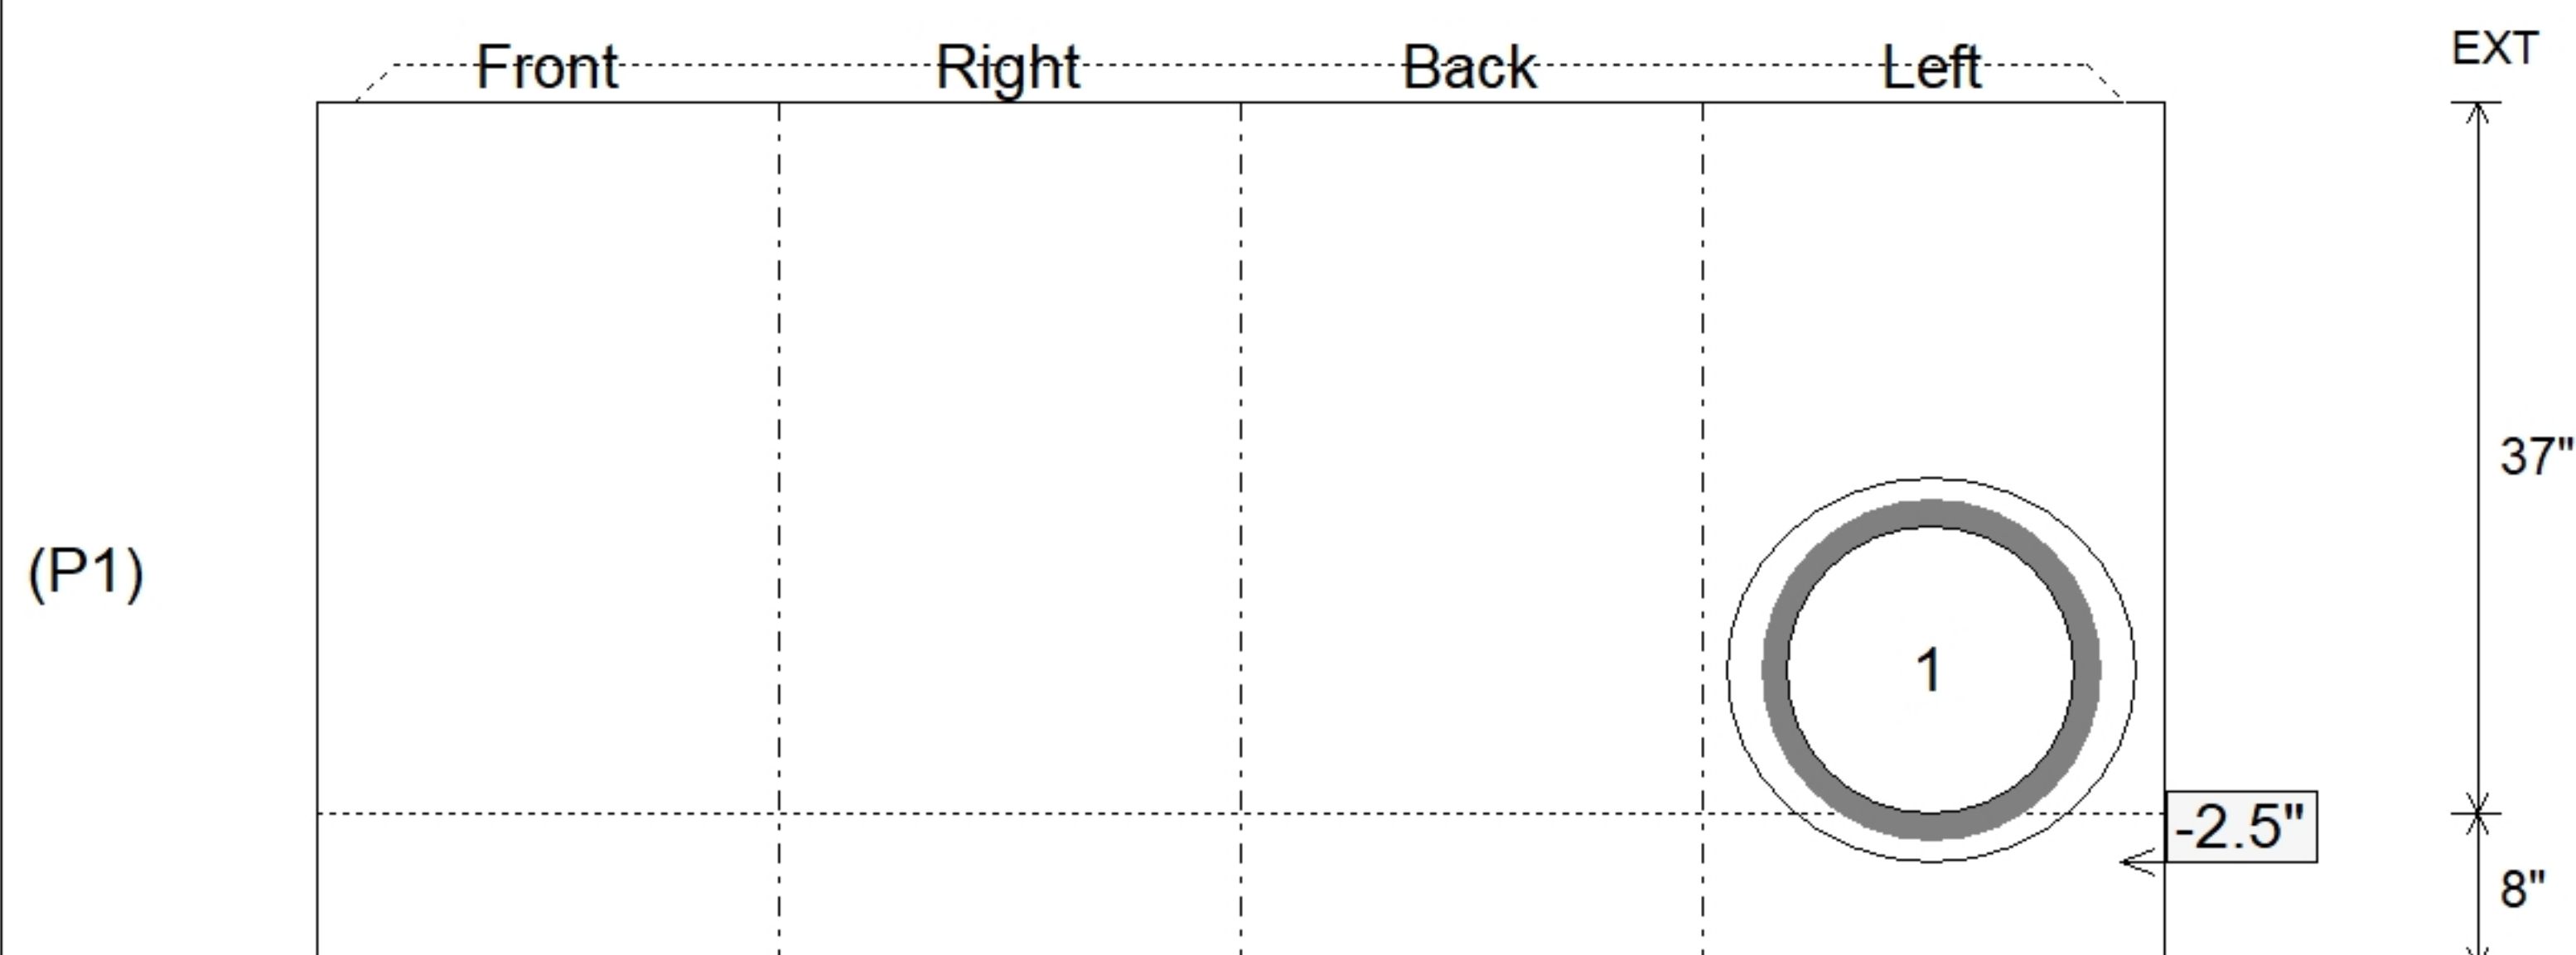

SUBMITTAL
APPROVED BY: