

Contractor: Kauffeld Brothers Construction

Plant: Beaver Dam



Size: 30" x 30"

Rim to Invert: 2.75'

Floor Height: 8"

Slack: 0"


1. INDOT INLET TYPE E / ASTM C913 SPEC'S.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. CASTING BY ICAST (INDOT TYPE 7 R-4215-C).
5. 34 1/2" X 34 1/2" X 1" DEEP RECESS IN THE TOP OF THE WALLS

- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

1) Hole - 20

0 lb

Structure Total: 3668 lb

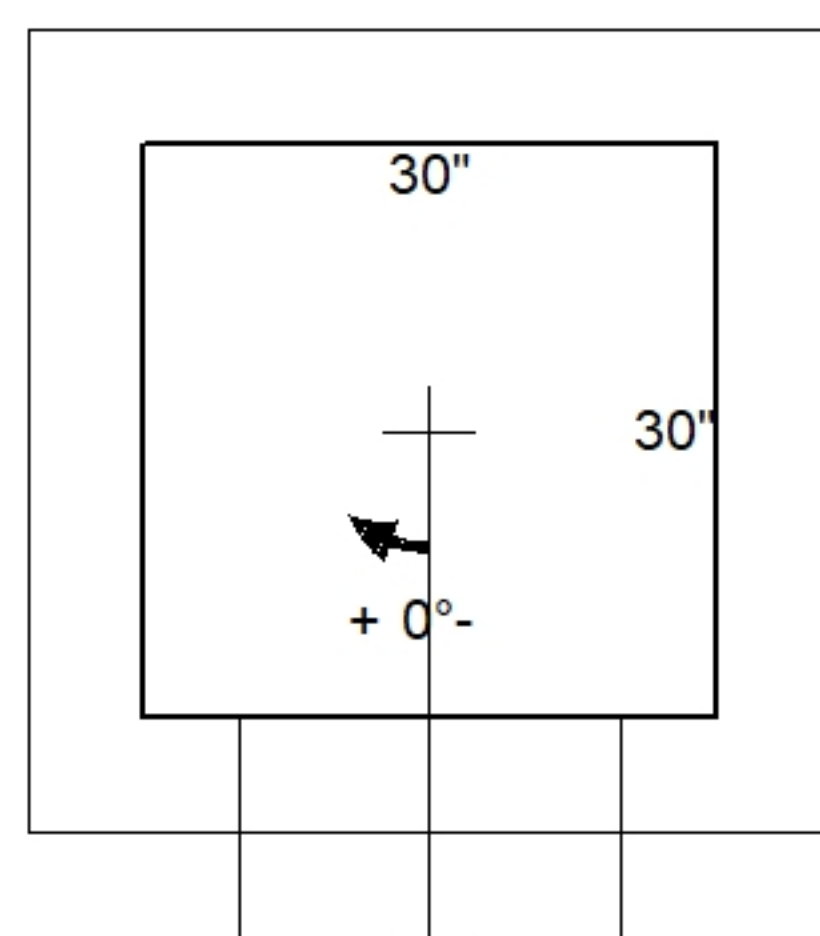


Invert: 1
Degree: 0°

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up ()	Ref
Rim	757'							
Reducer								
Invert 1	754.25'	0°	15" HDPE	17.6"	20"	Hole 20	-1.3"	P1
Invert 2								
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

—30" x 30" - CASTING HEIGHT - 0" - (P2)

30" x 30" - BOX BASE 6inW, 8inF, Variable Ht F/n - 33" - (P1)

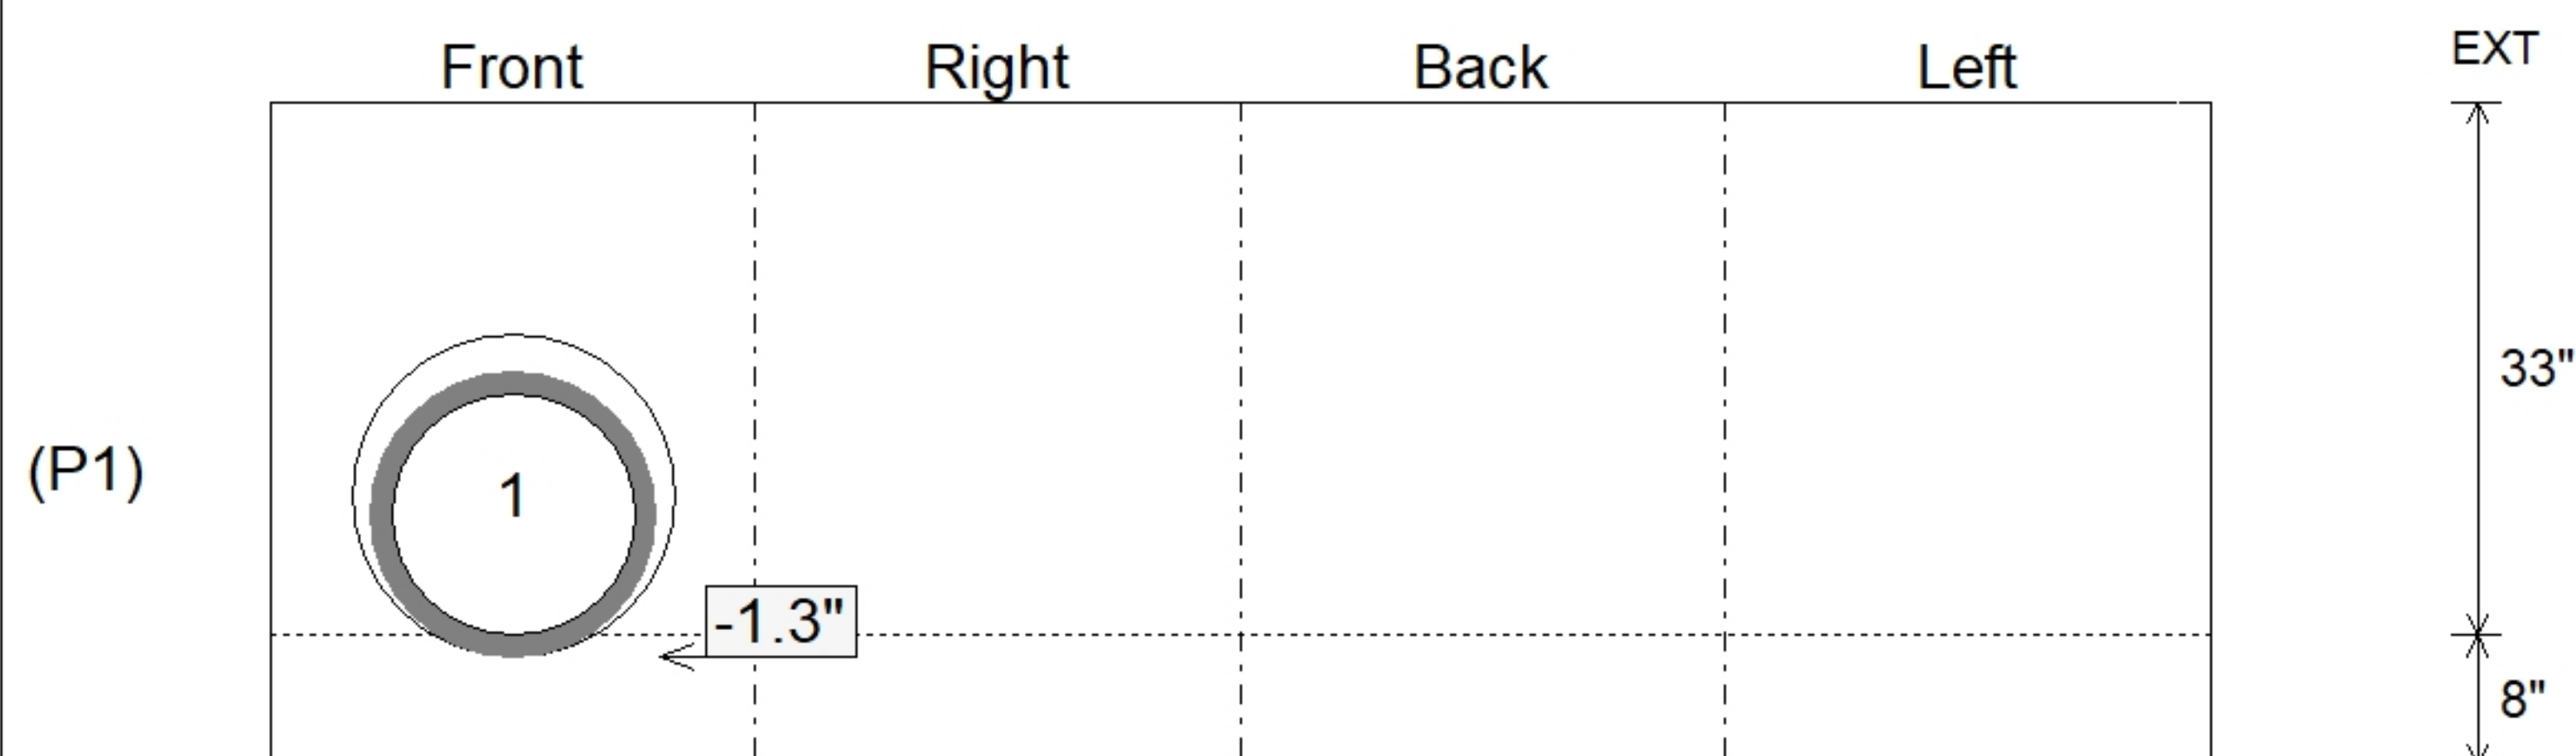

SUBMITTAL
APPROVED BY: