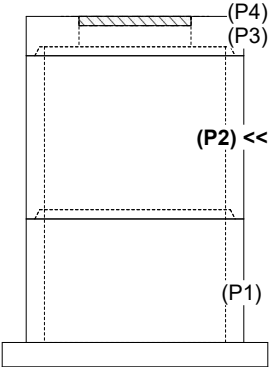

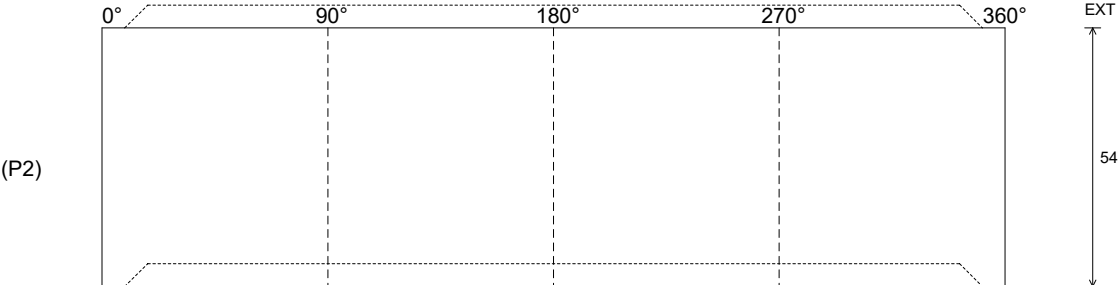


Job Name: 26-1394 - TMMI Ryder Lift Station Job Location: Princeton, IN Contractor: Koberstein Contracting, Inc.					Plant: 100 7/16/2026 2:28:41 PM		Tech: Jared - A PC: A. Chambers				
Structure ID: 5 MV (2)											
P2 MH060RS54			MH RISER T/G								
P4) 37" x 36" - HATCH (CAST FLUSH) - 3" P3) 60" - MH FLAT TOP w/37"x36" Hatch F/G - 13" P2) 60" - MH RISER T/G - 54" P1) 60" - MH BASE w/FLANGE (08F/08EF) T/n - 41" 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) This Structure Includes a Cast-in Item - 37" x 36" Hatch (Supplied by Others) 1) SECONDARY POUR - Extended Base Flange 2) 60" - Conseal CS-102 1.00" (Double) 3) PSX - 8QRS-S NYLO						0 lb 2305 lb 5637 lb 8287 lb 0 lb 0 lb 0 lb 0 lb 0 lb 20 lb ----- Structure Total: 16249 lb		Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. NO STEPS 5. LIFTERS: 4 EA. 5CA14 CONAC A-ANCHORS FOR PLANT & FIELD HANDLING - INSTALLED AT 0°, 90°, 180°, & 270°, MIN. 18" FROM TOP OF WALLS			
Rim: 464.81' Rim to Invert: 8.76' Slack: 0.48" Sump: 3.36" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)											
											
INSIDE WALL DIMENSIONS											
											
Coating (Int): Coating (Ext):			Seam Up: Tongue Seam Dn: Groove		Wall Thickness: 6" Floor Height: 0"		Height (Int): 54" Height (Ext): 54"		Weight (Net): 5637 lb Volume (Net): 1.44cu.yd		