

Job Name: 26-1415 - Perdue Foods Manhole
 Job Location: Cromwell, KY
 Contractor: Industrial Service Company

Plant: 100
 2/23/2026 2:25:11 PM

Tech: J. Horsley
 PC: J. Jarvis



Structure ID: 1 SS-MHDH

P2 MH060RS60S

MH RISER SPECIAL F/G

P3) 60" - CASTING HEIGHT - 0"	0 lb
P2) 60" - MH RISER SPECIAL F/G - 60"	6264 lb
P1) 60" - MH DH RISER Custom Ht T/F - 56"	5846 lb
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212	0 lb
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)	0 lb
2) 60" - Conseal CS-102 1.00" (Double)	0 lb
10) MH Step ML-10-TDS-NCR - 10"	0 lb
Structure Total:	12110 lb


Structure Notes:
 1. PER ASTM C478 SPECIFICATIONS.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. CASTING/GRATE BY OTHERS.
 4. CONFTRACTOR TO FIELD CORE HOLES IN RISER.

REINFORCING PER ASTM A615 (GRADE 60).
 - RISER/WALLS (As .18)


Rim: 462.75' Rim to Invert: 0' Slack: 0.16" Sump: 116.16" Step Position: 0°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (L)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

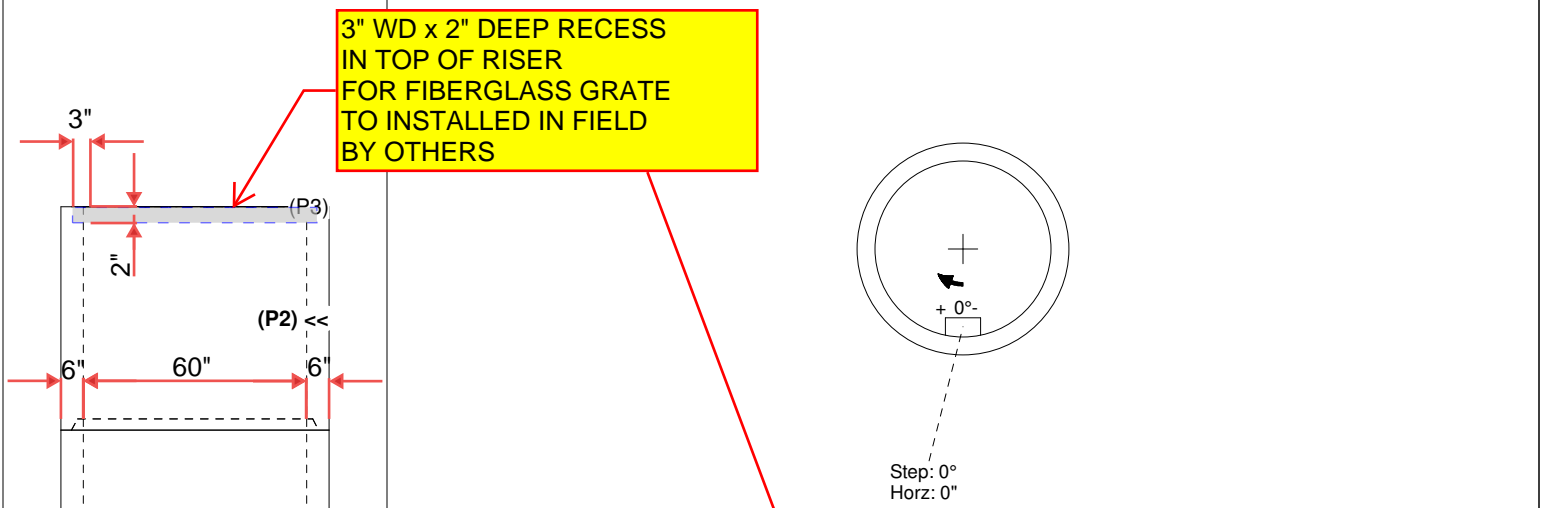

INSIDE WALL DIMENSIONS

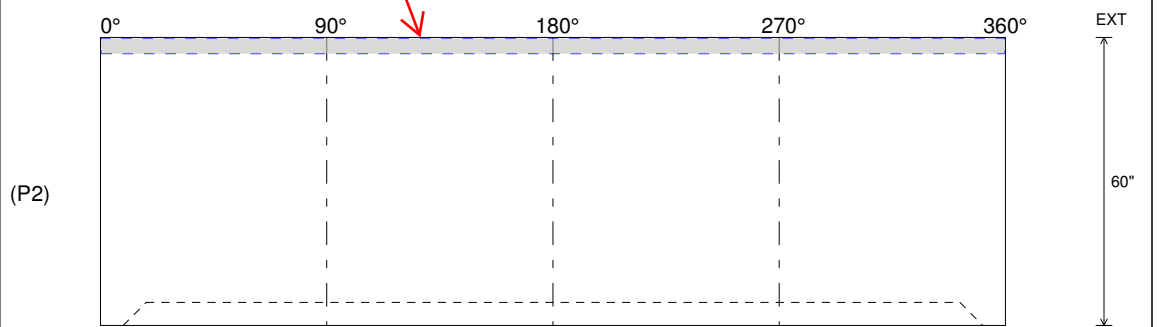

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 6" Floor Height: 0"	Height (Int): 60" Height (Ext): 60"	Weight (Net): 6264 lb Volume (Net): 1.6cu.yd
----------------------------------	----------------------------------	--	--	---