



Structure ID: LTHW-1-2 HW

P1 HWSB018


18" - SLOPED BOX OUTLET TYPE 1 F/F

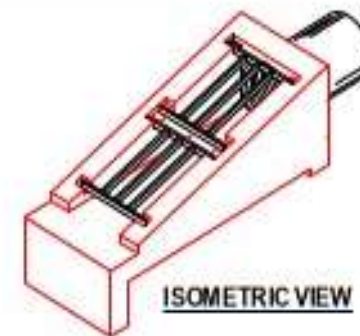

ISOMETRIC VIEW

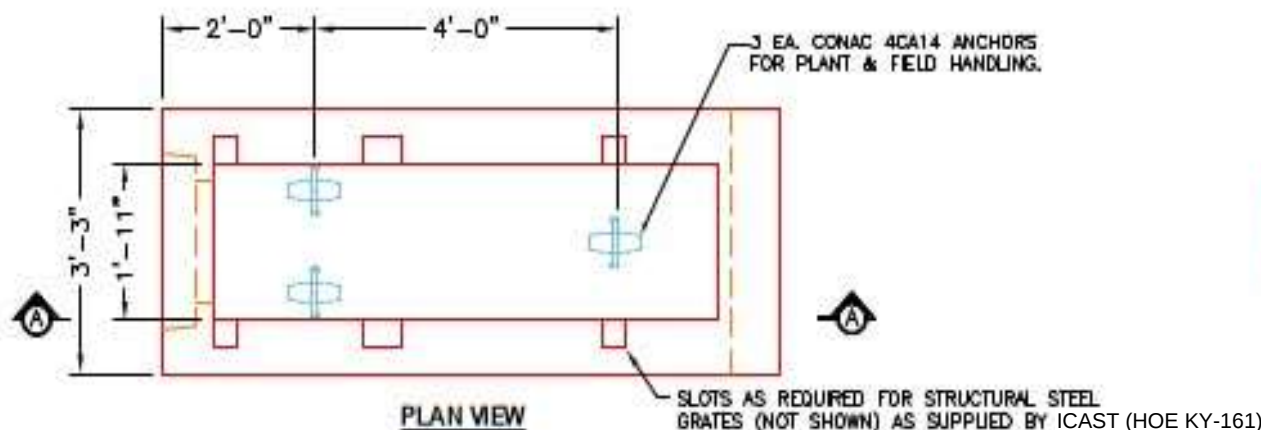


PLAN VIEW

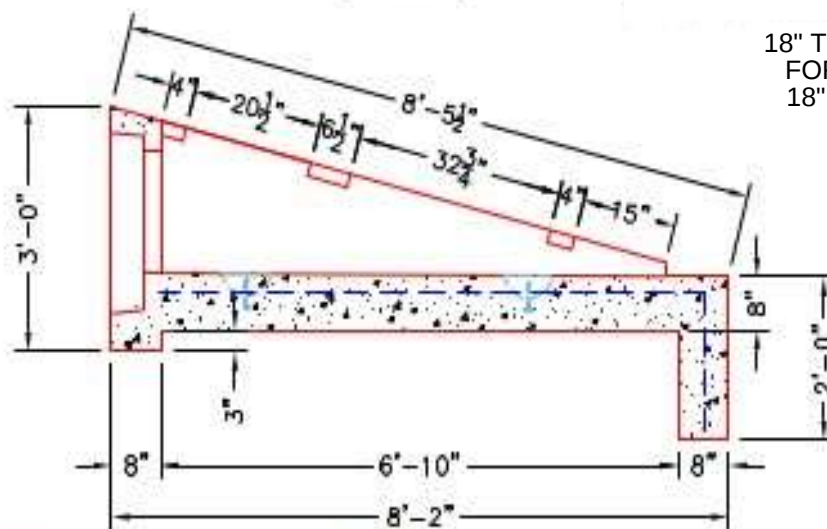

SECTION A-A

18" TO 22" STEPPED HOLE
 FORMER FOR 18" CMP.
 18" TO BE FLUSH WITH
 FLOOR

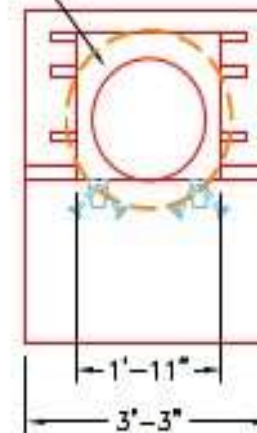

FRONT ELEVATION

NOTES:

1. CONCRETE: KYTC APPROVED.
2. REINFORCING: #5 BAR @ 12" C/C E.W.-GRADE 60 (WITH 2" CONCRETE COVER MINIMUM).
3. REINFORCING BARS TO BE TACK WELDED OR TIED.
4. PIPE AND LIFTING ANCHOR POCKETS TO BE GROUTED WITH KYTC APPROVED NON-SHRINK GROUT.
5. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWINGS RDB-100-00 & RDB-101-00 AND THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
6. 1/4" CHAMFER ON ALL EXPOSED EDGES.
7. PREFORMED STEPPED HOLE SIZED AS PER O.D. OF PIPE + 3"-4".

PRODUCTION WORK ORDER

PRODUCT I.D.: HWSB018

DESCRIPTION: KYTC 18" SLOPED BOX OUTLET TYPE 1

QUALITY CONTROL CHECKLIST

PRODUCT VIEW: RIGHT SIDE UP

CUSTOMER: Scott & Ritter

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ STEPPED HF CORRECT SIZE.
- ☐ REINFORCING CORRECT.
- ☐ SLOTS INSTALLED FOR GRATES.
- ☐ EDGES CHAMFERED.
- ☐ ALL PATCHWORK ACCEPTABLE.

PLANT: BEAVER DAM, KY.

PROJECT: Lake Tandy Spillway Repair

WEIGHT: 4,800 LBS.

STRUCTURE ID.: LTHW-1-2 HW

TOP SECTION JOINT: N/A

QUOTE/SALES ORDER NO: 26-1447

BASE SECTION JOINT: N/A

P.C.: T. SEKULA

DRAWING: N. RICHARDS

QC CHECK INITIALS:

DATE: 11/11/22

SCALE: NTS

PG. 1 of 1

