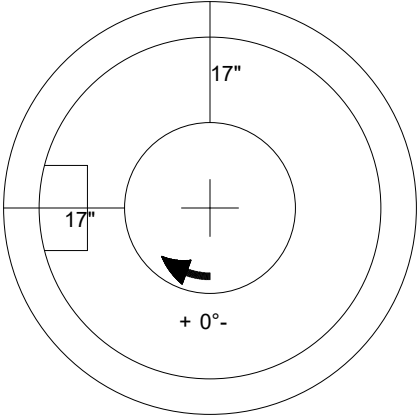



Job Name: 26-1466 - Lower Mill Creek HWDW Protection		Plant: 100	Tech: Jared - F	
Job Location: Cincinnati, OH		7/23/2026 10:26:32 AM	PC: E. Bradley	
Structure ID: 210-16 ST-MH				
P5 MH048CCN36		CON CONE w/24" HOLE F/G		
P6) 24" - CASTING HEIGHT - 7.25" P5) 48" - CON CONE w/24" HOLE F/G - 36" P4) 48" - MH RISER T/G - 72" P3) 48" - MH RISER T/G - 72" P2) 84" - MH Trans. Slab - 48" Hole ECC T/G - 17" P1) 84" - MH BASE Custom Ht T/n - 82" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) 84" - Hamilton Kent MH Gasket 3) 48" - Hamilton Kent MH Gasket 2) Hole - 62 18) MH Step ML-10-TDS-NCR - 10"		0 lb 2252 lb 5030 lb 5030 lb 5869 lb 16716 lb 0 lb 0 lb 1440 lb 0 lb 0 lb 0 lb 0 lb 0 lb Structure Total: 36337 lb	Structure Notes: . 1. PER CINCINNATI MSD / ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING SUPPLIED BY OTHERS. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB = H20 LOADING - RISER/WALLS (As .18) - TRANS SLAB #5 BARS AT 6" C.C.E.W. (DBL MAT) - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.	
				
				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 36"	Weight (Net): 2252 lb Volume (Net): 0.57cu.yd