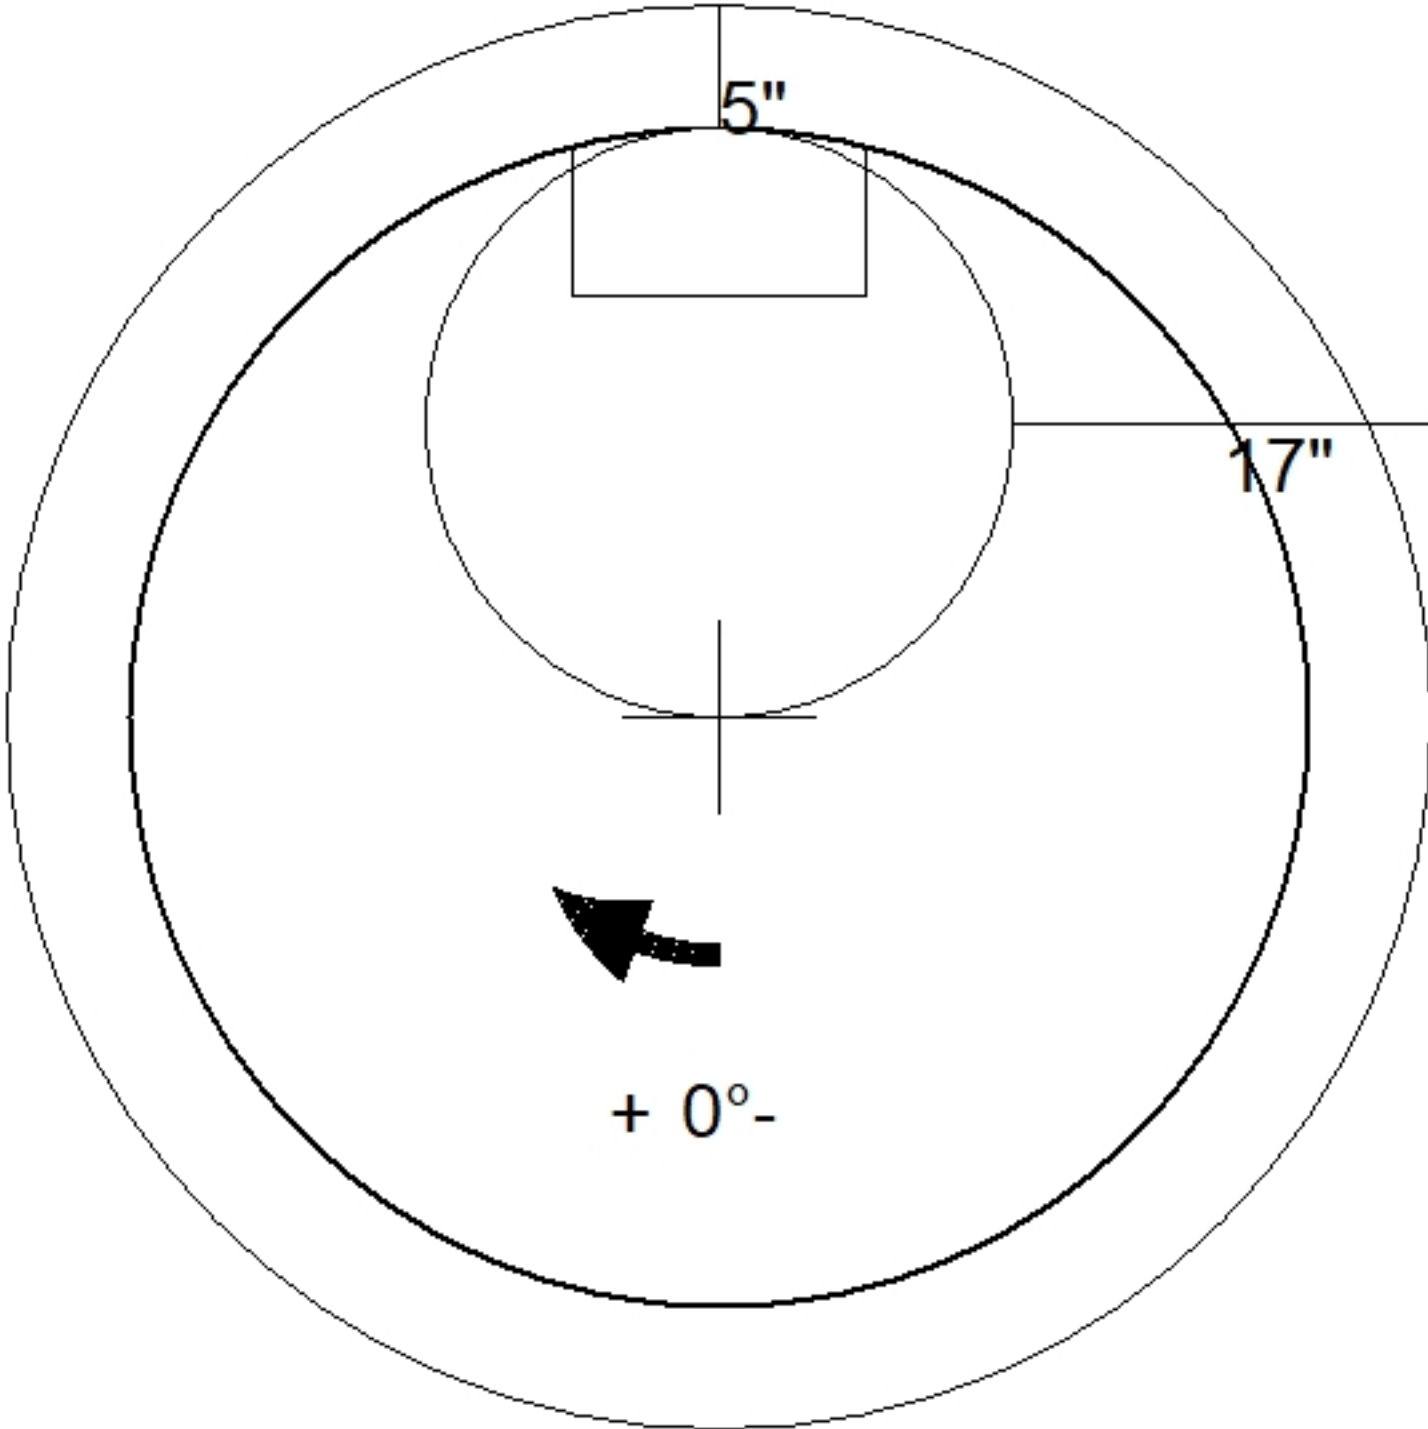
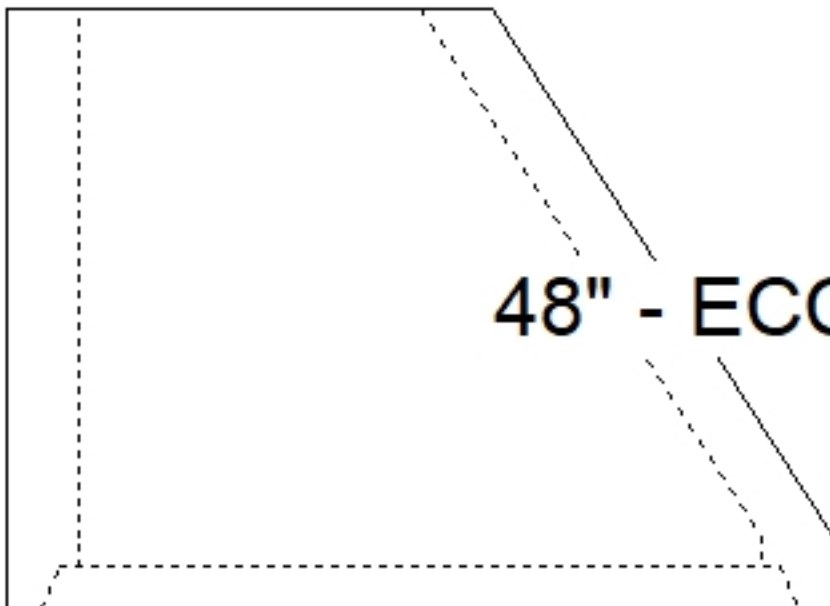


Job Name: 26-1515 Ford High Tech Manufacturing Facility		Plant: Beaver Dam	Tech: S. Felletter	
Job Location: Shelbyville, KY		5/11/2026 8:42:18 AM	PC: T. Lewis	
Contractor: Core & Main LP				
Structure ID: 2 SS-MH				
P3 MH048CN42		ECC CONE w/ 24" HOLE F/G		
P5) 24" - CASTING HEIGHT - 7" P4) 24" - GRADE RING F/F - 4" P3) 48" - ECC CONE w/ 24" HOLE F/G - 42" P2) 48" - MH RISER T/G - 60" P1) 48" - MH BASE T/n - 24" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) CASTING - HOE MC-420 F/C Sanitary 2) 48" - Conseal CS-102 1.00" (Double) 1) PSX - 12-08 NYLO 10) MH Step ML-10-TDS-NCR - 10"		0 lb 270 lb 3200 lb 4192 lb 2959 lb 0 lb 0 lb 1440 lb 340 lb 0 lb 8 lb 0 lb ----- 12408 lb Structure Total:	Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MC-420 F/C "SANITARY"). REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12 C.C.E.W.	
				
 48" - ECC CONE w/ 24" HOLE F/G - 42" - (P3)				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 42"	Weight (Net): 3200 lb Volume (Net): 0.5cu.yd