

Job Name: 26-1545 - KYTC Boone Co. Camp Ernst Roundabout (ID 3002312)
Job Location: Burlington, KY
Contractor: Lawrence Construction & Leasing, Inc.

Plant: 100

5/13/2026 2:22:14 PM

Tech: J.Horsley

PC: J. Jarvis



Structure ID: D7-9 JBB

P2 BX024024-08LD08S

BX FLAT LID 8inW SPEC. (KY JB-B1) F/F



- P3) CASTING (cast in) - 0
P2) 24" x 24" - BX FLAT LID 8inW SPEC. (KY JB-B1) F/F - 8"
P1) 24" x 24" - BOX BASE 8inW, 8inF F/n - 30"
1) CASTING - HOE KY-206 F/C (KY TY1)
1) 24" x 24" - SGL 1"x14.5' Butyl
2) Hole - 18

Structure Total:

0 lb
770 lb
3310 lb
206 lb
0 lb
0 lb
4286 lb

Structure Notes: ***KYTC STATE PROJECT**

1. KYTC JUNCTION BOX B1 / PER ASTM C913 SPEC'S.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. TOP SLAB w KYTC TYPE 1 F/C CAST FLUSH.
4. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As. 62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

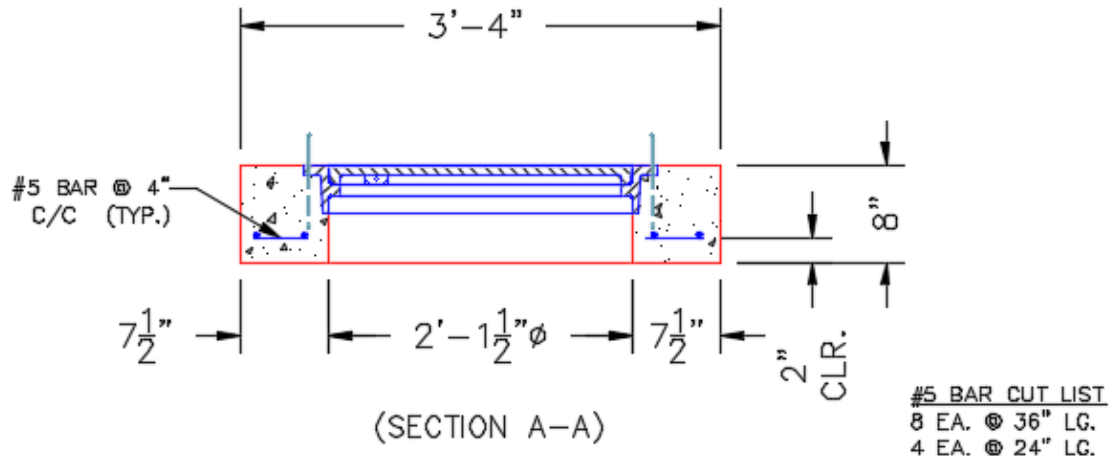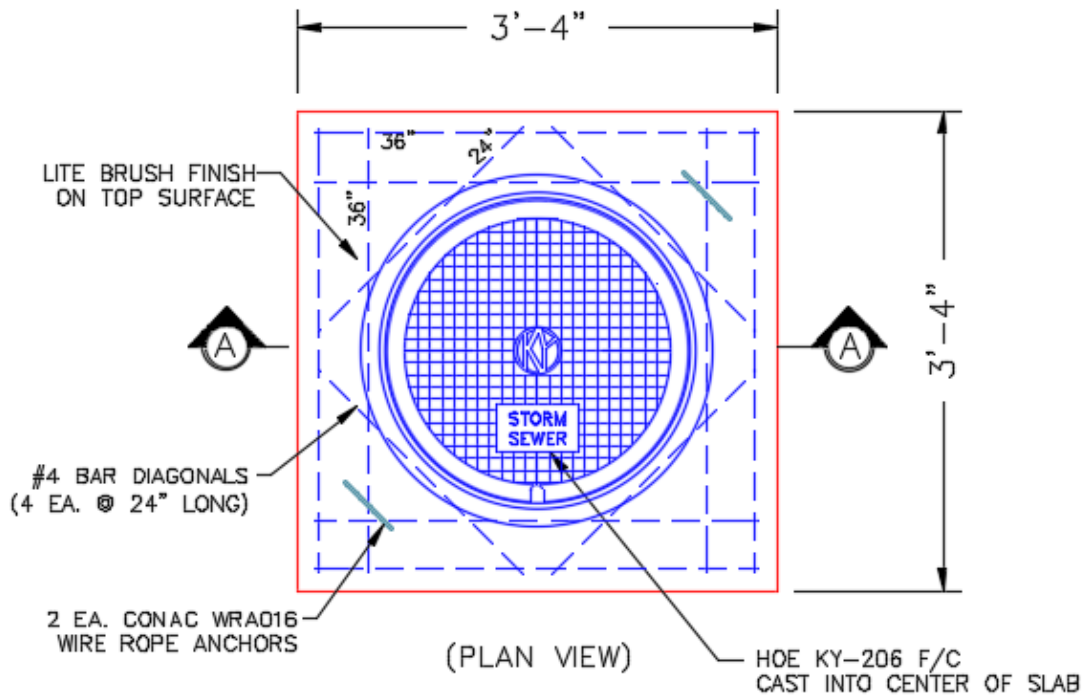

#5 BAR CUT LIST
8 EA. @ 36" LG.
4 EA. @ 24" LG.

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 770 lb
Volume (Net): 0.2cu.yd