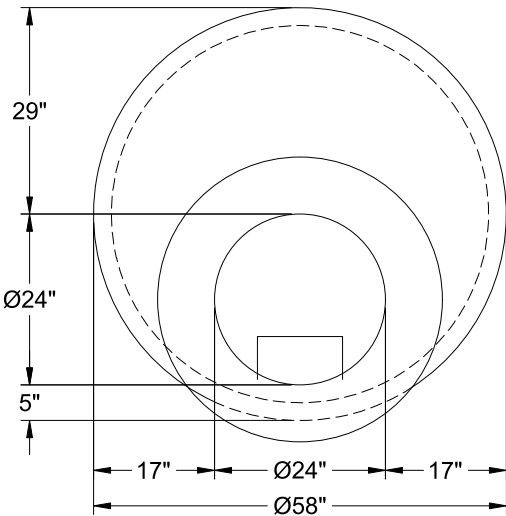
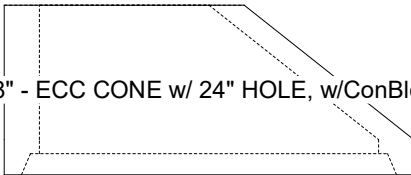


Job Name: 26-1577 - Elkhorn Elementary Redesign Job Location: Frankfort, KY 40601 Contractor: Louisville Paving and Construction		Plant: 100 5/5/2026 1:41:05 PM	Tech: Jared - A PC: J. Jarvis		
Structure ID: MH4-6 SS-MH					
P2 MH048CN24CDARED		ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red F/G			
P4) 24" - CASTING HEIGHT - 7" P3) 24" - GRADE RING w/ConBlock-CDA Red F/F - 4" P2) 48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red F/G - 24" P1) 48" - MH BASE w/ConBlock-CDA Red T/n - 24" 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) JOINT WRAP - 12" WD x 048" MAC WRAP 1) ADMIXTURE CONBLOCK CDA RED 1) CASTING - HOE MC-350 F/C FSD 1) 48" - Conseal CS-102 1.00" (Double) 2) PSX - 12-08 NYLO		0 lb 270 lb 1738 lb 2911 lb 1440 lb 0 lb 0 lb 305 lb 0 lb 16 lb ----- Structure Total: 6680 lb	Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. CONBLOCK CDA RED ADMIXTURE REQUIRED 5. STEPS REQUIRED 6. HOE MC-350 FRAME & COVER "SANITARY FSD" SUPPLIED BY ICAST		
					
 48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red F/G - 24" - (P2)					
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 24"	Weight (Net): 1738 lb Volume (Net): 0.44cu.yd	