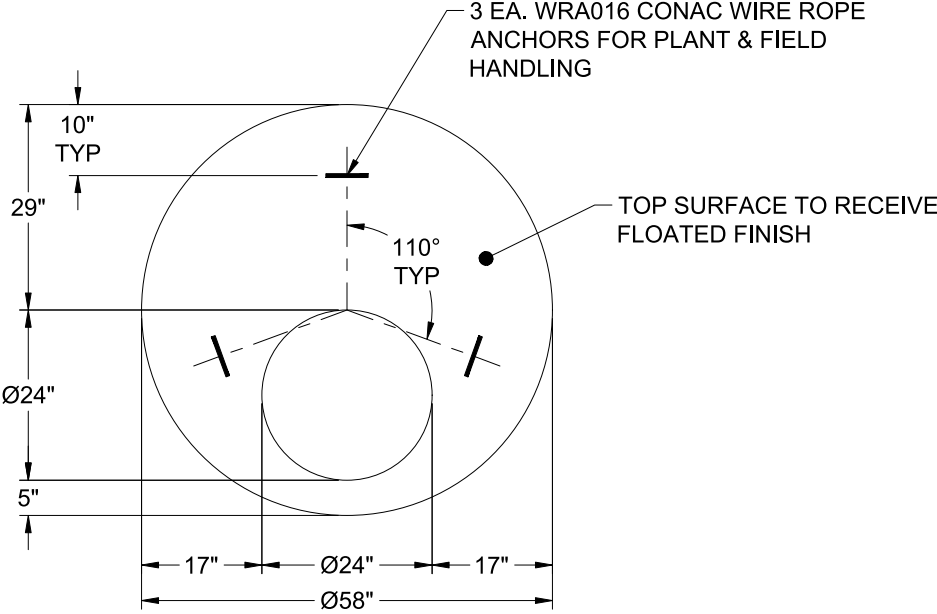
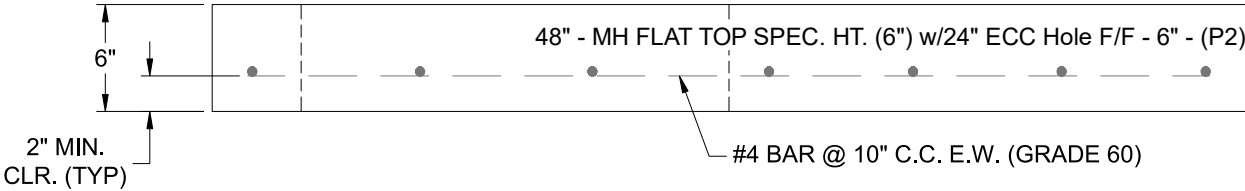


Job Name: 26-1577 - Elkhorn Elementary Redesign Job Location: Frankfort, KY 40601 Contractor: Louisville Paving and Construction		Plant: 100 5/5/2026 1:41:05 PM	Tech: Jared - A PC: J. Jarvis	
Structure ID: MH503-3 ST-MH				
P2 MH048LD06SP		MH FLAT TOP SPEC. HT. (6") w/24" ECC Hole F/F		
P3) 24" - CASTING HEIGHT - 7" P2) 48" - MH FLAT TOP SPEC. HT. (6") w/24" ECC Hole F/F - 6" P1) 48" - MH BASE Custom Ht F/n - 26" 1) CASTING - HOE MC-350 F/C Storm 1) 48" - Conseal CS-102 1.00" 1) DOGHOUSE INVRTD - 30"x26" 1) DOGHOUSE INVRTD - 24"x26" 1) DOGHOUSE INVRTD - 20"x20"		0 lb 771 lb 2444 lb 305 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 3520 lb	<u>Structure Notes:</u> 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #4 BAR @ 10" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE MC-350 FRAME & COVER "STORM" SUPPLIED BY ICAST 5. LIFTERS: 3 EA. WRA016 CONAC WIRE ROPE ANCHORS FOR PLANT & FIELD HANDLING 6. TOP SURFACE TO RECEIVE FLOATED FINISH	
				
				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 5"	Height (Ext): 6"	Weight (Net): 771 lb Volume (Net): 0.2cu.yd