


Job Name: 26-1582 - Wyelea Commons Water Vault Job Location: Franklin, TN Contractor: Core & Main LP	Plant: 100	Tech:	Jared - A	
	5/1/2026 1:12:52 PM	PC:	T. Lewis	
Structure ID: 2 (1)				
P1 BX7296-06W06F-BA42		BOX BASE 6inW, 6inF T/n		

P4) 48" x 72" - HATCH (CAST FLUSH) - 3"	0 lb
P3) 72" x 96" - CB FLAT TOP 6"W w/48"x72" HATCH F/F - 6"	3000 lb
P2) 72" x 96" - BOX RISER 6inW, Variable Ht FT F/G - 30"	5437 lb
P1) 72" x 96" - BOX BASE 6inW, 6inF T/n - 42"	12041 lb
1) This Structure Includes a Cast-in Item - 48" X 72" Hatch (Supplied by Others)	0 lb
1) This Structure Includes a Cast-in Item - M.A. Industries Sump Pan & Lid (Supplied by iCast)	0 lb
1) SUMP DISH - M.A. Industries Sump Pan & Lid	0 lb
2) 72" x 96" - Conseal CS-102 1.00" (Double)	0 lb
2) Hole - 12	0 lb
6) MH Step ML-10-TDS-NCR - 10"	0 lb
Structure Total:	20478 lb

Structure Notes:
1. PER ASTM C-913 SPECIFICATIONS
2. CONCRETE: 5,000 PSI AT 28 DAYS
3. REINFORCEMENT: #4 BAR @ 8" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
4. STEPS AT 270 DEGREES
5. M.A. INDUSTRIES SUMP PAN & LID SUPPLIED BY ICAST - TO BE CAST INTO BASE FLOOR
6. 8" DIA. OPENING REQUIRED IN BASE FLOOR FOR 4" PVC FLOOR DRAIN
7. LIFTERS: 4 EA. 5CA14 CONAC A-ANCHORS FOR PLANT & FIELD HANDLING - INSTALLED AS SHOWN

Rim: 6.5'	Rim to Invert: 4.75'	Slack: 0"	Sump: 21"	Step Position: 270°						
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	1.75'	0°	42"	8" DI	9"	Hole 12	12"	12"	19"	0"
Invert 2	1.75'	180°	42"	8" DI	9"	Hole 12	12"	12"	19"	0"
Invert 3										

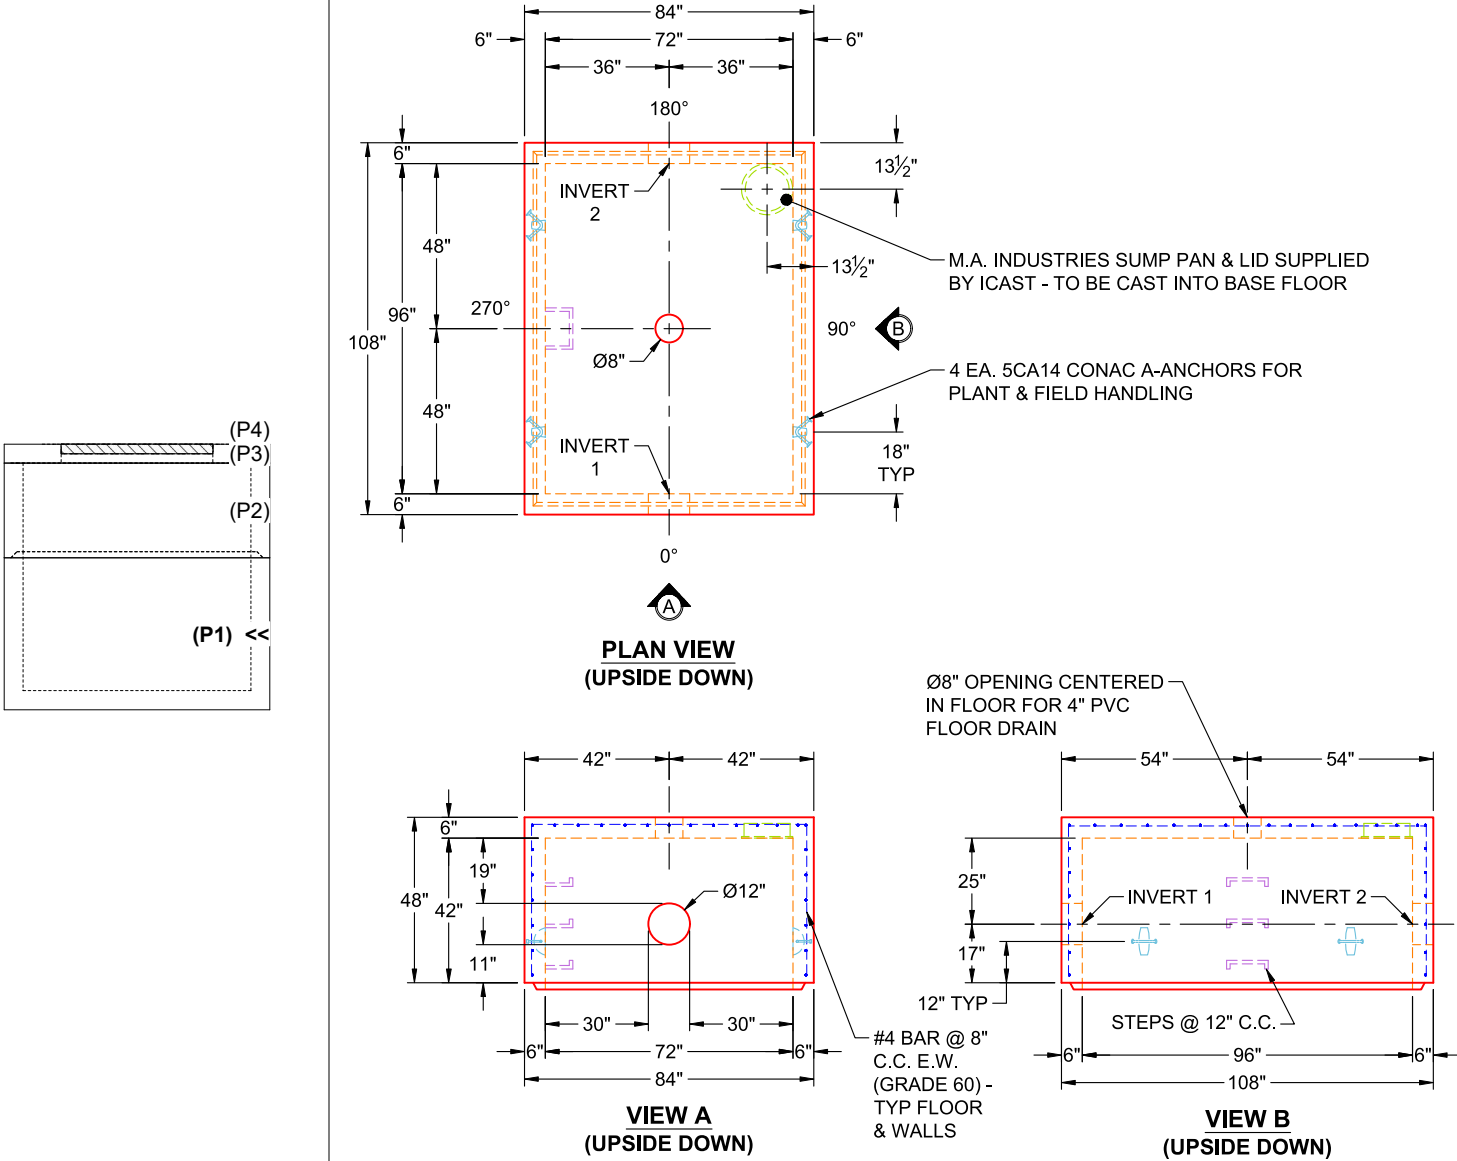

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 6" Floor Height: 6"	Height (Int): 42" Height (Ext): 48"	Weight (Net): 12041 lb Volume (Net): 3.08cu.yd
----------------------------------	---------------------------------	--	--	---

Job Number:

26-1582

Job Name:

Wyelea Commons Water Vault

Structure:

2 (1)

Note:

M.A. Industries Sump Pan & Lid
Supplied By iCast To Be Cast Into
Base Floor