

Job Name: 26-1635 - KYTC Oldham Co (261505)
 Job Location: Peewee Valley, KY
 Contractor: Cleary Construction, Inc.

Plant: 100

7/22/2026 12:46:23 PM

Tech: Jared - F

PC: T. Ryan



Structure ID: 36525-143 MHA

P1 MH048BAVF

MH BASE Custom Ht T/n

- P3) 24" - CASTING HEIGHT - 4"
 P2) 48" - MH FLAT LID w/24in ECC Hole F/G - 12"
 P1) 48" - MH BASE Custom Ht T/n - 69"
 1) 48" - Con Seal CS-102 1.00"
 1) 24" - Con Seal CS-102 1.00"
 2) Hole - 28
 1) Hole - 18
 6) MH Step ML-10-TDS-NCR - 10"

Structure Total: 7057 lb

Structure Notes:

KYTC STATE PROJECT

1. PER KYTC MH A / ASTM C478 SPEC'S.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING SUPPLIED BY OTHERS (HOE KY-206 F/C (KY TY1)).
4. INVERT BY OTHERS.

REINFORCING PER ASTM A615 (GRADE 60.)

- TOP SLAB (As. 62) #5 BARS AT 6" C.C.E.W..

- RISER/WALLS (As.12).




- FLOOR (As.31) #5 BARS AT 12" C.C.E.W.

Rim: 810.51' Rim to Invert: 6.92' Slack: 0.04" Sump: 2" Step Position: 90°


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	803.59'	0°	1"	24" CMP	25"	Hole 28	28"	29.941"	0"	1"
Invert 2	805.69'	196°	99.25"	24" CMP	25"	Hole 28	28"	29.896"	25.25"	0"
Invert 3	803.59'	298°	150.875"	15" CMP	16"	Hole 18	18"	18.451"	0.5"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

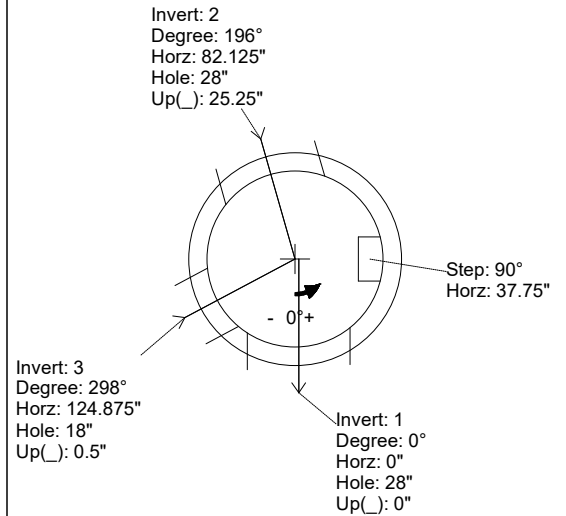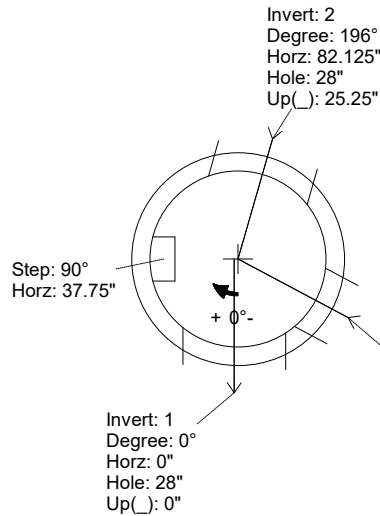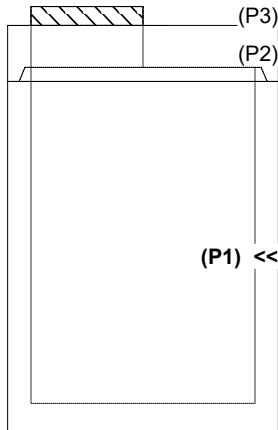

INSIDE WALL DIMENSIONS

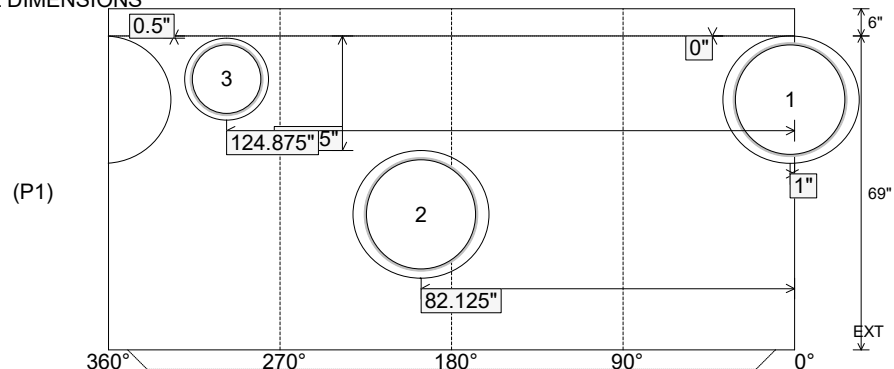

Coating (Int):
Coating (Ext):

Seam Up: Tongue
Seam Dn: n/a

Wall Thickness: 5"
Floor Height: 6"

Height (Int): 69"
Height (Ext): 75"

Weight (Net): 5496 lb
Volume (Net): 1.4cu.yd