

Job Name: 26-1635 - KYTC Oldham Co (261505)  
Job Location: Pee wee Valley, KY  
Contractor: Cleary Construction, Inc.

Plant: 100

7/22/2026 12:46:53 PM

Tech: Jared - F

PC: T. Ryan



**Structure ID: 37887-150 ST- JB**

**P2 BX036048-12TS48**

**CB FLAT TOP 8"W SOLID F/F**

- P2) 36" x 48" - CB FLAT TOP 8"W SOLID F/F - 12"  
P1) 36" x 48" - BOX BASE 8inW, 8inF, Variable Ht F/n - 44"  
1) 36" x 48" - Conseal CS-102 1.00"  
2) Hole - 40  
2) Hole - 16


3351 lb  
6122 lb  
0 lb  
0 lb  
0 lb  
-----  
Structure Total: 9473 lb

Structure Notes:


**\*\* KYTC STATE PROJECT \*\***

1. KYTC JUNCTION BOX / PER ASTM C913 SPEC'S.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. SOLID TOP SLAB - NO CASTING.

REINFORCING PER ASTM A615 (GRADE 60).  
- TOP SLAB (As. 62) #5 BARS AT 6" C.C.E.W.  
- WALLS (As .31) #5 BARS AT 12" C.C.E.W.  
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

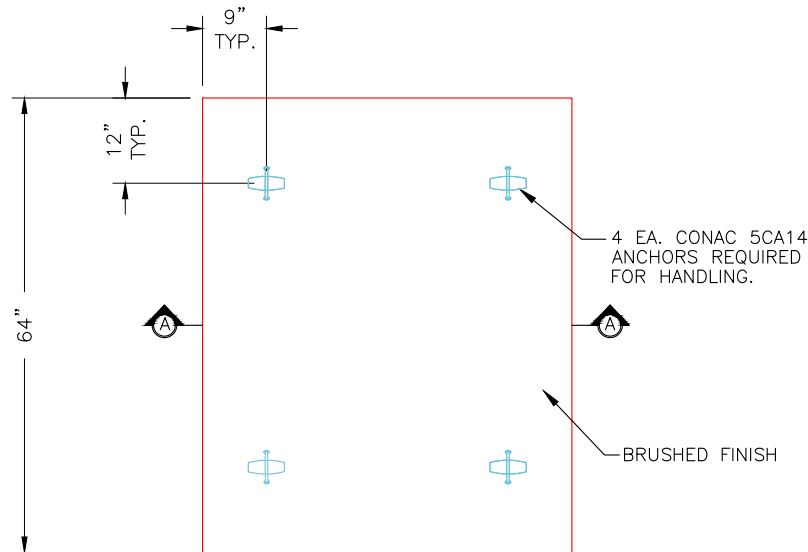

**PLAN VIEW**

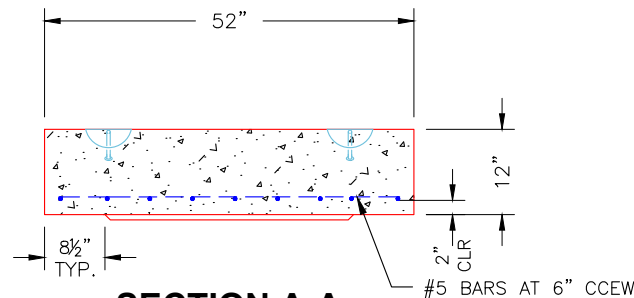

**SECTION A-A**

NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):  
Coating (Ext):

Seam Up: Flat  
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 12"

Weight (Net): 3351 lb  
Volume (Net): 0.86cu.yd