



Job Name: 26-1635 - KYTC Oldham Co (261505) Job Location: Pee wee Valley, KY Contractor: Cleary Construction, Inc.					Plant: 100 7/24/2026 2:03:43 PM		Tech: Jared - F PC: T. Ryan				
Structure ID: 13829-16 CBIA-1											
P1 BX3648-08BAVF BOX BASE 8inW, 8inF, Variable Ht F/n											
P5) 24" x 120" - CB INLET KY A 10' TOP RIGHT F/G - 10" P4) 24" x 120" - CB INLET KY A 10' BOTTOM RIGHT T/G - 18" P3) 24" x 36" - BOX RISER 8inW T/G - 24" P2) 36" x 48" - CB FT REDUCER 24"X36" HOLE T/F - 8" P1) 36" x 48" - BOX BASE 8inW, 8inF, Variable Ht F/n - 43" 1) CASTING - HOE KY-206 F/C (KY CBI A) 1) 36" x 48" - Conseal CS-102 1.00" 2) 24" x 36" - Conseal CS-102 1.00" 1) Hole - 40 1) Hole - 28 1) Hole - 34 1) Hole - 6						3398 lb 5270 lb 2449 lb 1654 lb 6092 lb 206 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb Structure Total: 19069 lb		Structure Notes: ** KYTC STATE PROJECT ** 1. PER KYTC CBI TYPE A / ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY-206 F/C (KY CBI A)). REINFORCING PER ASTM A615 (GRADE 60). - TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W. - TRANS. SLAB (As .62) #5 BARS AT 6" C.C.E.W (DBL MAT) - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 755.5' Rim to Invert: 8.85' Slack: 3.2" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	746.65'	75°	30.25"	36" CMP	37"	Hole 40	40"	41.411"	-2"	5"	
Invert 2	746.73'	180°	26"	24" CMP	25"	Hole 28	28"	28"	-1"	0"	
Invert 3	746.73'	270°	32"	30" CMP	31"	Hole 34	34"	34"	-1"	0"	
Invert 4	749.48'	180°	26"	4" HDPE (perf pipe)	4.8"	Hole 6	6"	6"	33"	0"	
Invert 5											
Invert 6											
Invert 7											
Invert 8											


RIGHT-SIDE UP VIEW (int. dimensions)

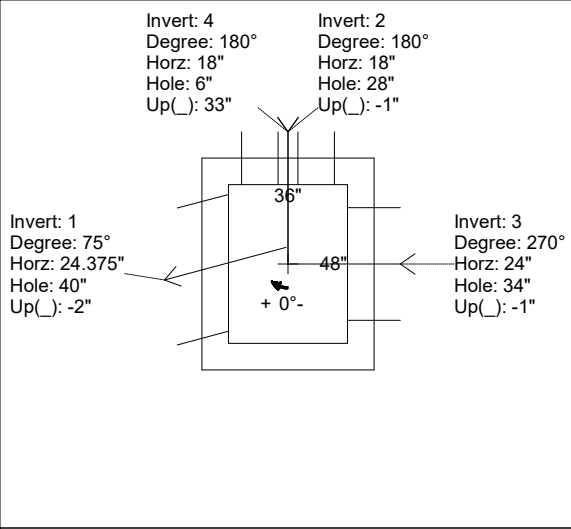

UPSIDE-DOWN VIEW (int. dimensions)

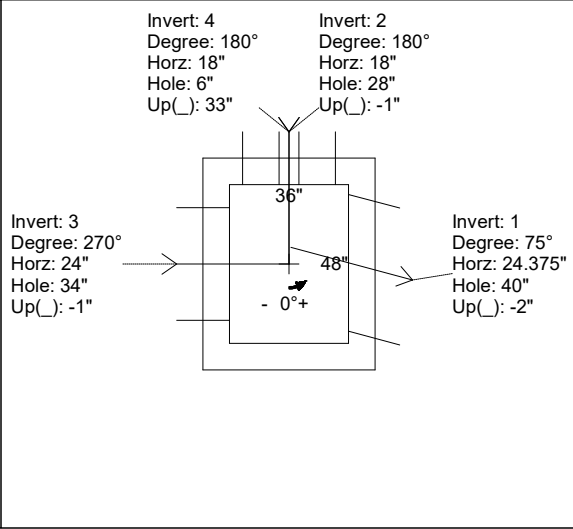

INSIDE WALL DIMENSIONS

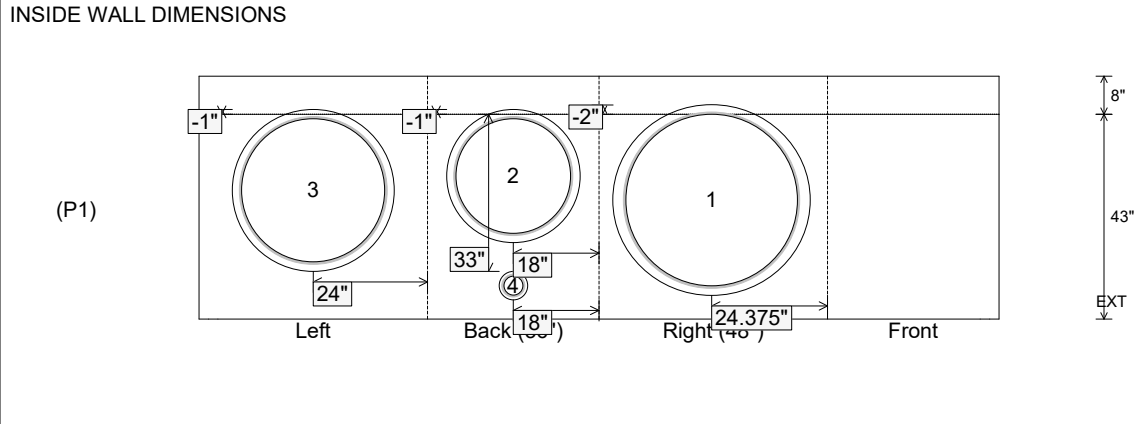

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 43" Height (Ext): 51"	Weight (Net): 6092 lb Volume (Net): 1.56cu.yd
----------------------------------	-------------------------------	--	--	--