




Job Name: 26-1635 - KYTC Oldham Co (261505) Job Location: Pee wee Valley, KY Contractor: Cleary Construction, Inc.					Plant: 100 7/24/2026 2:03:56 PM		Tech: Jared - F PC: T. Ryan				
Structure ID: 15050-28 CBIA-26											
P1 BX2436-08BA30 BOX BASE 8inW, 8inF T/n											
P3) 24" x 120" - CB INLET KY A 10' TOP LEFT F/G - 10" P2) 24" x 120" - CB INLET KY A 10' BOTTOM LEFT T/G - 18" P1) 24" x 36" - BOX BASE 8inW, 8inF T/n - 30" 1) CASTING - HOE KY-206 F/C (KY CBI A) 1) 24" x 36" - Conseal CS-102 1.00" 1) Hole - 22 1) Hole - 6 1) Hole - 18					3400 lb 5270 lb 4012 lb 206 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 12888 lb		Structure Notes: . ** KYTC STATE PROJECT ** 1. PER KYTC CBI TYPE A / ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY-206 F/C (KY CBI A)). REINFORCING PER ASTM A615 (GRADE 60). - TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W. - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Rim: 787.9' Rim to Invert: 5.09' Slack: 3.08" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1	782.81'	0°	20"	18" CMP	19"	Hole 22	22"	22"	-2"	0"	
Invert 2	784.56'	180°	20"	4" HDPE (perf pipe)	4.8"	Hole 6	6"	6"	20"	0"	
Invert 3	782.89'	270°	26"	15" CMP	16"	Hole 18	18"	18"	-0.5"	0"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

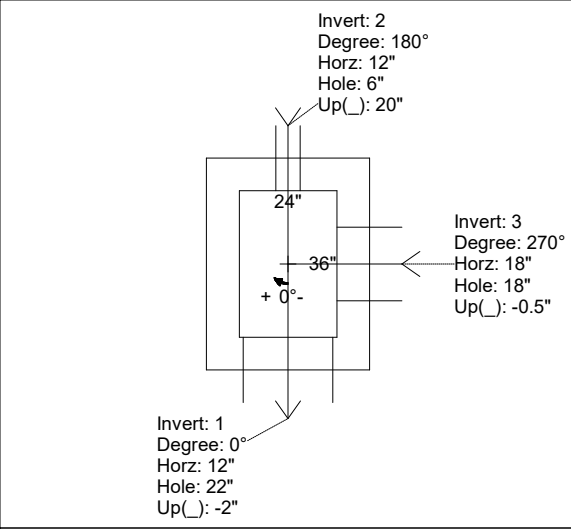


RIGHT-SIDE UP VIEW (int. dimensions)

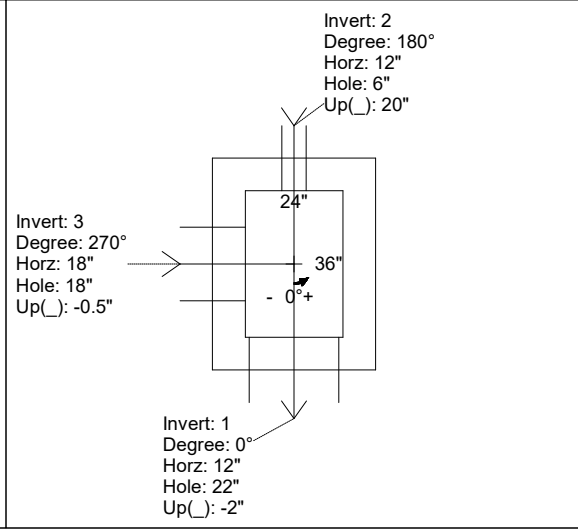

UPSIDE-DOWN VIEW (int. dimensions)

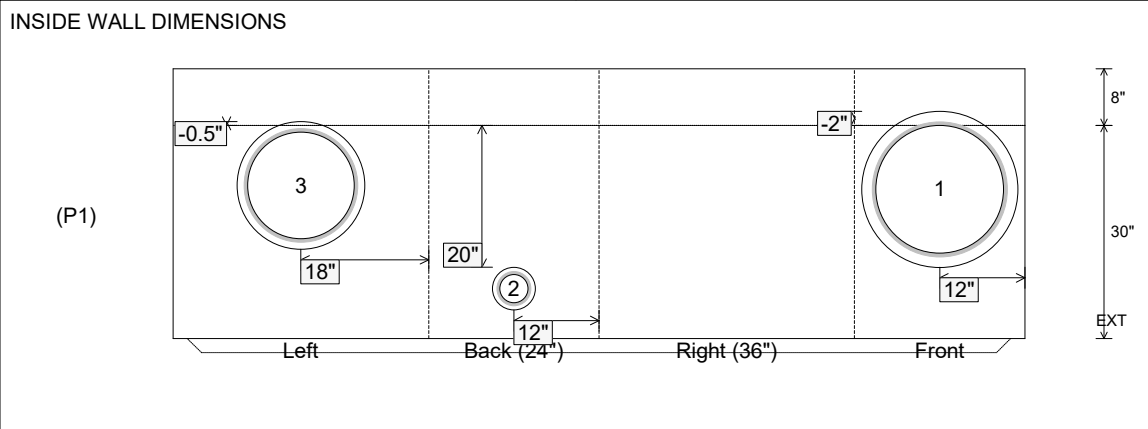

INSIDE WALL DIMENSIONS

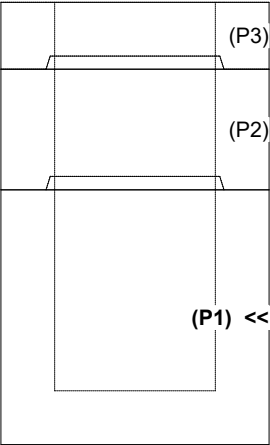

(P1) << (P2) (P3)

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 30" Height (Ext): 38"	Weight (Net): 4012 lb Volume (Net): 1.02cu.yd
----------------------------------	---------------------------------	--	--	--