

Job Name: 26-1635 - KYTC Oldham Co (261505)  
Job Location: Peewee Valley, KY  
Contractor: Cleary Construction, Inc.

Plant: 100

7/24/2026 2:10:37 PM

Tech: Jared - F

PC: T. Ryan



**Structure ID: 15510-48 CBIA-9**

**P2 BX036036-08TS024036**

**CB TRANSITION SLAB 24"X36" HOLE T/F**

- P4) 24" x 120" - CB INLET KY A 10' TOP RIGHT F/G - 10"  
P3) 24" x 120" - CB INLET KY A 10' BOTTOM RIGHT T/G - 18"  
P2) 36" x 36" - CB TRANSITION SLAB 24"X36" HOLE T/F - 8"  
P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 37"  
1) CASTING - HOE KY-206 F/C (KY CBI A)  
1) 36" x 36" - Conseal CS-102 1.00"  
1) 24" x 36" - Conseal CS-102 1.00"  
1) Hole - 28  
1) Hole - 18  
1) Hole - 6  
1) Hole - 22

3398 lb  
5270 lb  
1235 lb  
5328 lb  
206 lb  
0 lb  
0 lb  
0 lb  
0 lb  
0 lb  
0 lb  
-----  
15437 lb

Structure Total:



Structure Notes:

\*\* KYTC STATE PROJECT \*\*

1. PER KYTC CBI TYPE A / ASTM C913 SPEC'S.
2. CONCRETE = 4,000 PI AT 28 DAYS.
3. CASTING BY ICAST (HOE KY-206 F/C (KY CBI A)).

REINFORCING PER ASTM A615 (GRADE 60).

- TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W.
- TRANS. SLAB (As .62) #5 BARS AT 6" C.C.E.W (DBL MAT)
- WALLS (As .31) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

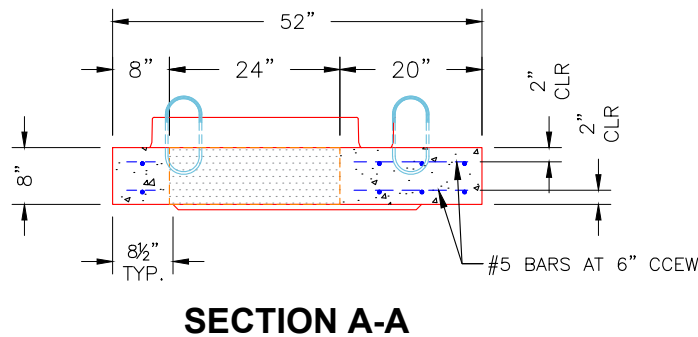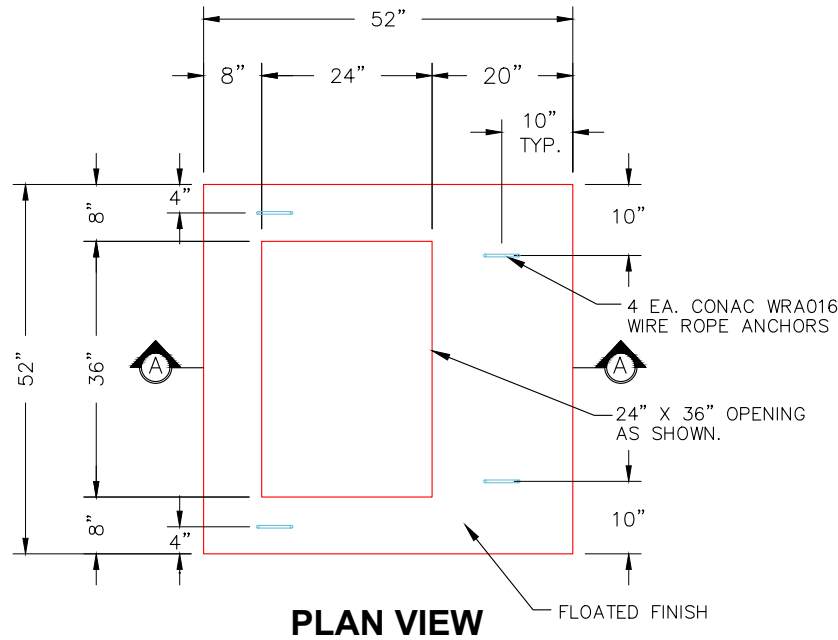

NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (DOUBLE MAT) (GRADE 60).

Coating (Int):  
Coating (Ext):

Seam Up: Tongue  
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 1235 lb  
Volume (Net): 0.32cu.yd