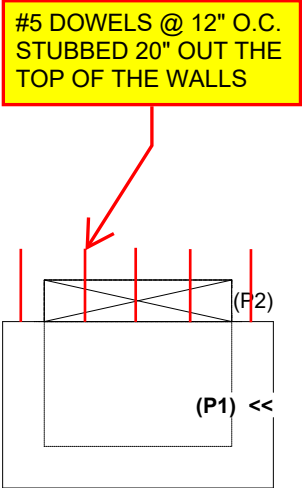


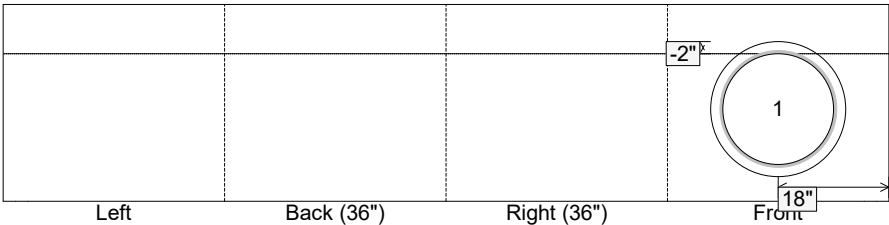


Job Name: 26-1635 - KYTC Oldham Co (261505) Job Location: Pee wee Valley, KY Contractor: Cleary Construction, Inc.					Plant: 100 7/27/2026 11:36:21 AM		Tech: Jared - F PC: T. Ryan				
Structure ID: 15180-104 DBI3 - 8A											
P1 BX3636-08BA24		BOX BASE 8inW, 8inF F/n									
P2) 36" x 36" - P.I.P. - BY OTHERS - 8" P1) 36" x 36" - BOX BASE 8inW, 8inF F/n - 24" 1) 36" x 36" - Conseal CS-102 1.00" 1) Hole - 22						0 lb 4396 lb 0 lb 0 lb ----- Structure Total: 4396 lb		Structure Notes: . **KYTC STATE PROJECT** 1. KYTC DBI TYPE 3 / ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. STUB #5 BARS 20" OUT TOP OF WALLS (SPA@12"C/C). 4. CASTING SUPPLIED BY OTHERS (HOE KY-328 SET (DBI 3)). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 784.93'		Rim to Invert: 2.71'		Slack: 0.52"		Sump: 0"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1	782.22'	0°	26"	18" CMP	19"	Hole 22	22"	22"	-2"	0"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimensions) #5 DOWELS @ 12" O.C. STUBBED 20" OUT THE TOP OF THE WALLS   Invert: 1 Degree: 0° Horz: 18" Hole: 22" Up(_): -2"  Invert: 1 Degree: 0° Horz: 18" Hole: 22" Up(_): -2" INSIDE WALL DIMENSIONS  (P1)											