

Job Name: 26-1635 - KYTC Oldham Co (261505)
 Job Location: Peewee Valley, KY
 Contractor: Cleary Construction, Inc.

Plant: 100

7/28/2026 10:13:39 AM

Tech: Jared - F

PC: T. Ryan



Structure ID: 16865-108 DBI3 - 18A

P1 BX3636-08BAVF

BOX BASE 8inW, 8inF, Variable Ht F/n

- P2) 36" x 36" - P.I.P. - BY OTHERS - 8"
 P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 56"
 1) 36" x 36" - Conseal CS-102 1.00"
 2) Hole - 22"

Structure Total: 7843 lb

Structure Notes:

****KYTC STATE PROJECT****

1. KYTC DBI TYPE 3 / ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. STUB #5 BARS 20" OUT TOP OF WALLS (SPA@12"C/C).
4. CASTING SUPPLIED BY OTHERS (HOE KY-328 SET (DBI 3)).


REINFORCING PER ASTM A615 (GRADE 60).

- WALLS (As .31) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.


Rim: 827.26' Rim to Invert: 5.34' Slack: 0.08" Sump: 0" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	821.92'	0°	26"	18" CMP	19"	Hole 22	22"	22"	-2"	0"
Invert 2	822'	220°	31.5"	18" CMP	19"	Hole 22	22"	28.719"	-1"	-12.5"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


#5 DOWELS @ 12" O.C.
 STUBBED 20" OUT THE
 TOP OF THE WALLS

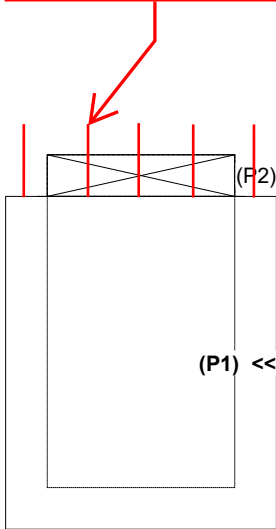


RIGHT-SIDE UP VIEW (int. dimensions)

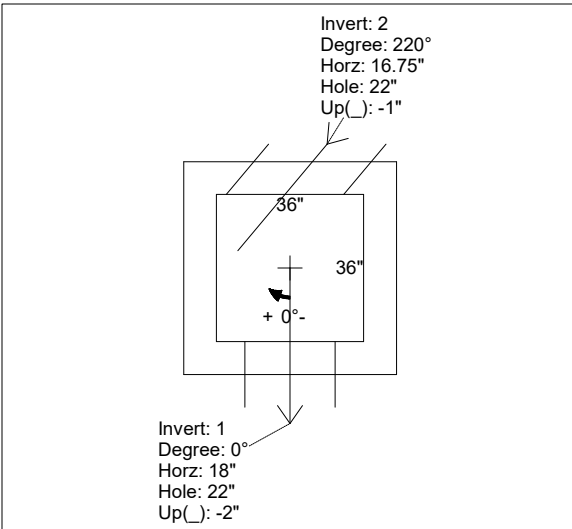

UPSIDE-DOWN VIEW (int. dimensions)

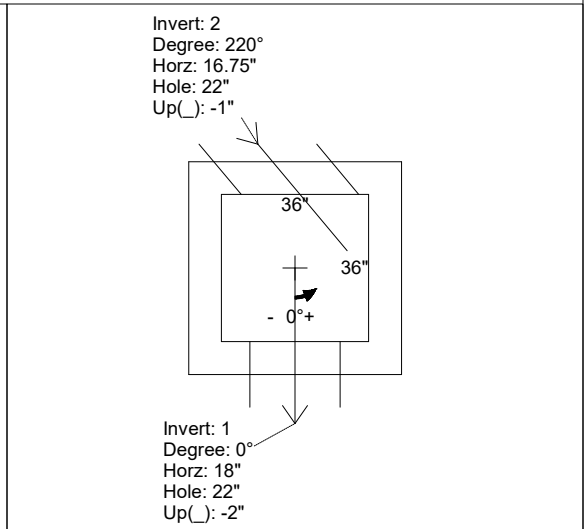

INSIDE WALL DIMENSIONS

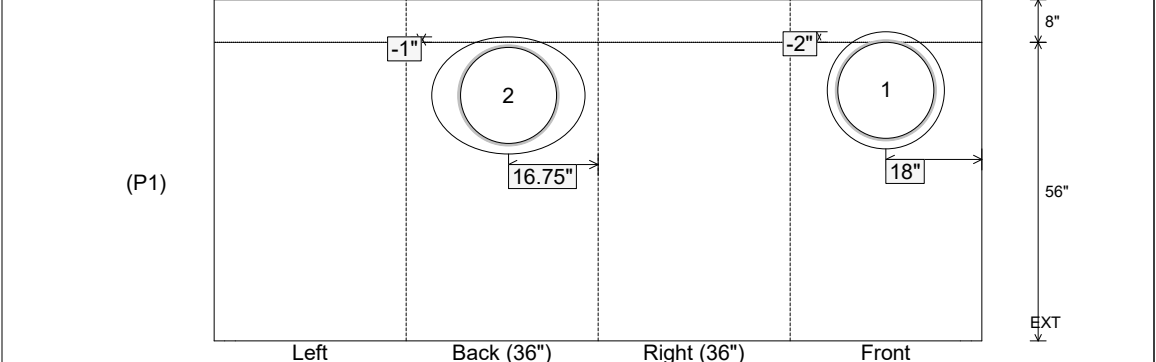

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: n/a

Wall Thickness: 8"
 Floor Height: 8"

Height (Int): 56"
 Height (Ext): 64"

Weight (Net): 7843 lb
 Volume (Net): 2cu.yd