

Job Name: 26-1635 - KYTC Oldham Co (261505)

Job Location: Peewee Valley, KY

Contractor: Cleary Construction, Inc.

Plant: 100

7/27/2026 11:35:57 AM

Tech: Jared - F

PC: T. Ryan



Structure ID: 48820-74 CBIA

P1 BX2436-08BVF

BOX BASE 8inW, 8inF, Variable Ht T/n

P4) 24" x 120" - CB INLET KY A 10' TOP LEFT F/G - 10"

P3) 24" x 120" - CB INLET KY A 10' BOTTOM LEFT T/G - 18"

P2) 24" x 36" - BOX RISER 8inW, Variable Ht T/G - 18"

P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht T/n - 49"

1) CASTING - HOE KY-206 F/C (KY CBIA)

2) 24" x 36" - Conseal CS-102 1.00"

2) Hole - 22"

3400 lb

5270 lb

1837 lb

5886 lb

206 lb

0 lb

0 lb

Structure Total: 16598 lb

Structure Notes:

** KYTC STATE PROJECT **

1. PER KYTC CBI TYPE A / ASTM C913 SPEC'S.

2. CONCRETE = 4,000 PI AT 28 DAYS.

3. CASTING BY ICAST (HOE KY-206 F/C (KY CBI A)).

REINFORCING PER ASTM A615 (GRADE 60).

- TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W.

- WALLS/RISER (As .31) #5 BARS AT 12" C.C.E.W.

- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Rim: 821.13'

Rim to Invert: 8.25'


Slack: 4"

Sump: 0"


Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	812.88'	0°	20"	18" CMP	19"	Hole 22	22"	22"	-2"	0"
Invert 2	812.88'	180°	20"	18" CMP	19"	Hole 22	22"	22"	-2"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

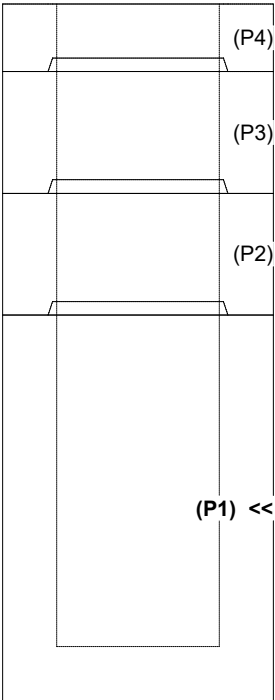

UPSIDE-DOWN VIEW (int. dimensions)

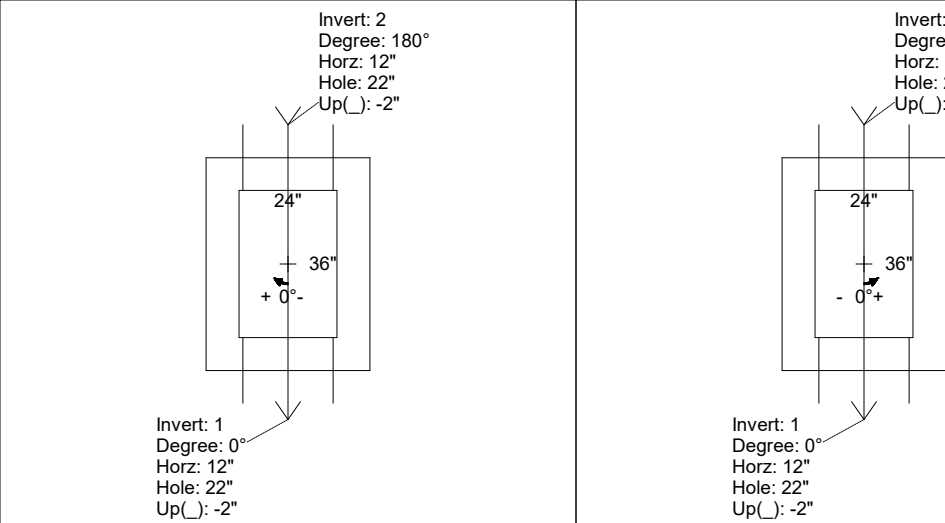

INSIDE WALL DIMENSIONS

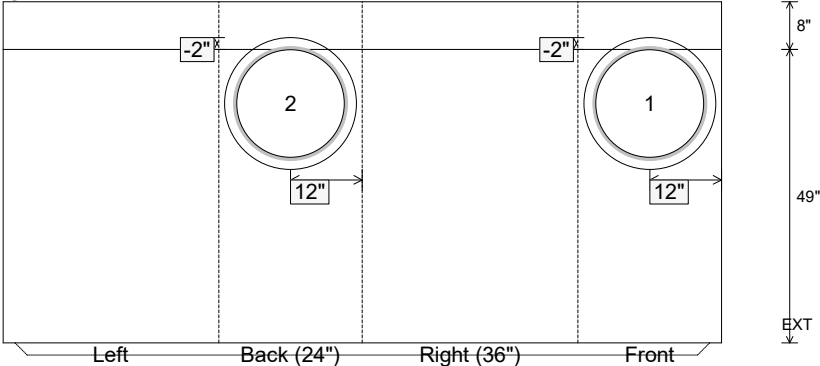

Coating (Int):

Coating (Ext):

Seam Up: Tongue

Seam Dn: n/a

Wall Thickness: 8"

Floor Height: 8"

Height (Int): 49"

Height (Ext): 57"

Weight (Net): 5886 lb

Volume (Net): 1.5cu.yd