

Contractor: Cleary Construction, Inc.

TECH: Jared - F


Plant: 100



Slack: 2.24"

- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Structure Total: 13774 lb

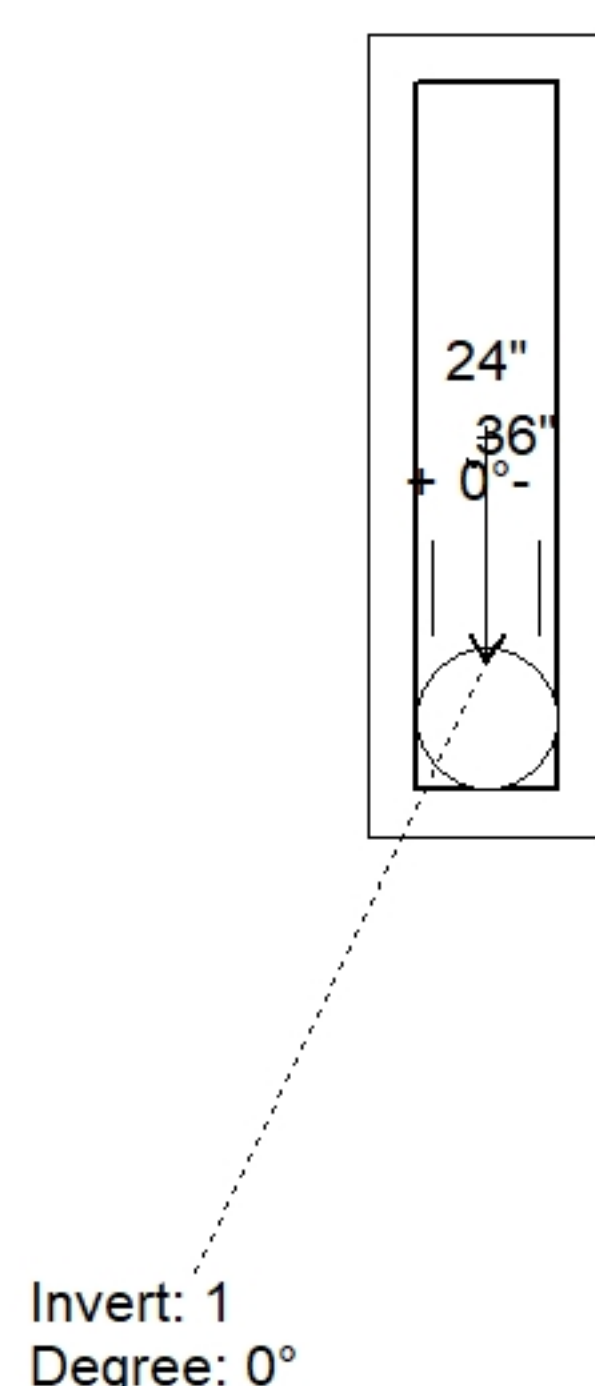


Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (↓)	Ref
Rim	805.46'							
Reducer								
Invert 1	799.94'	0°	15" CMP	16"	18"	Hole 18	-1.5"	P1
Invert 2								
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

24" x 120" - CB INLET KY A 10' TOP LEFT - 10" - (P3)

24" x 120" - CB INLET KY A 10' BOTTOM LEFT - 18" - (P2)

24" x 36" - BOX BASE 8inW, 8inF - 36" - (P1)

Default - Interior Dimensions

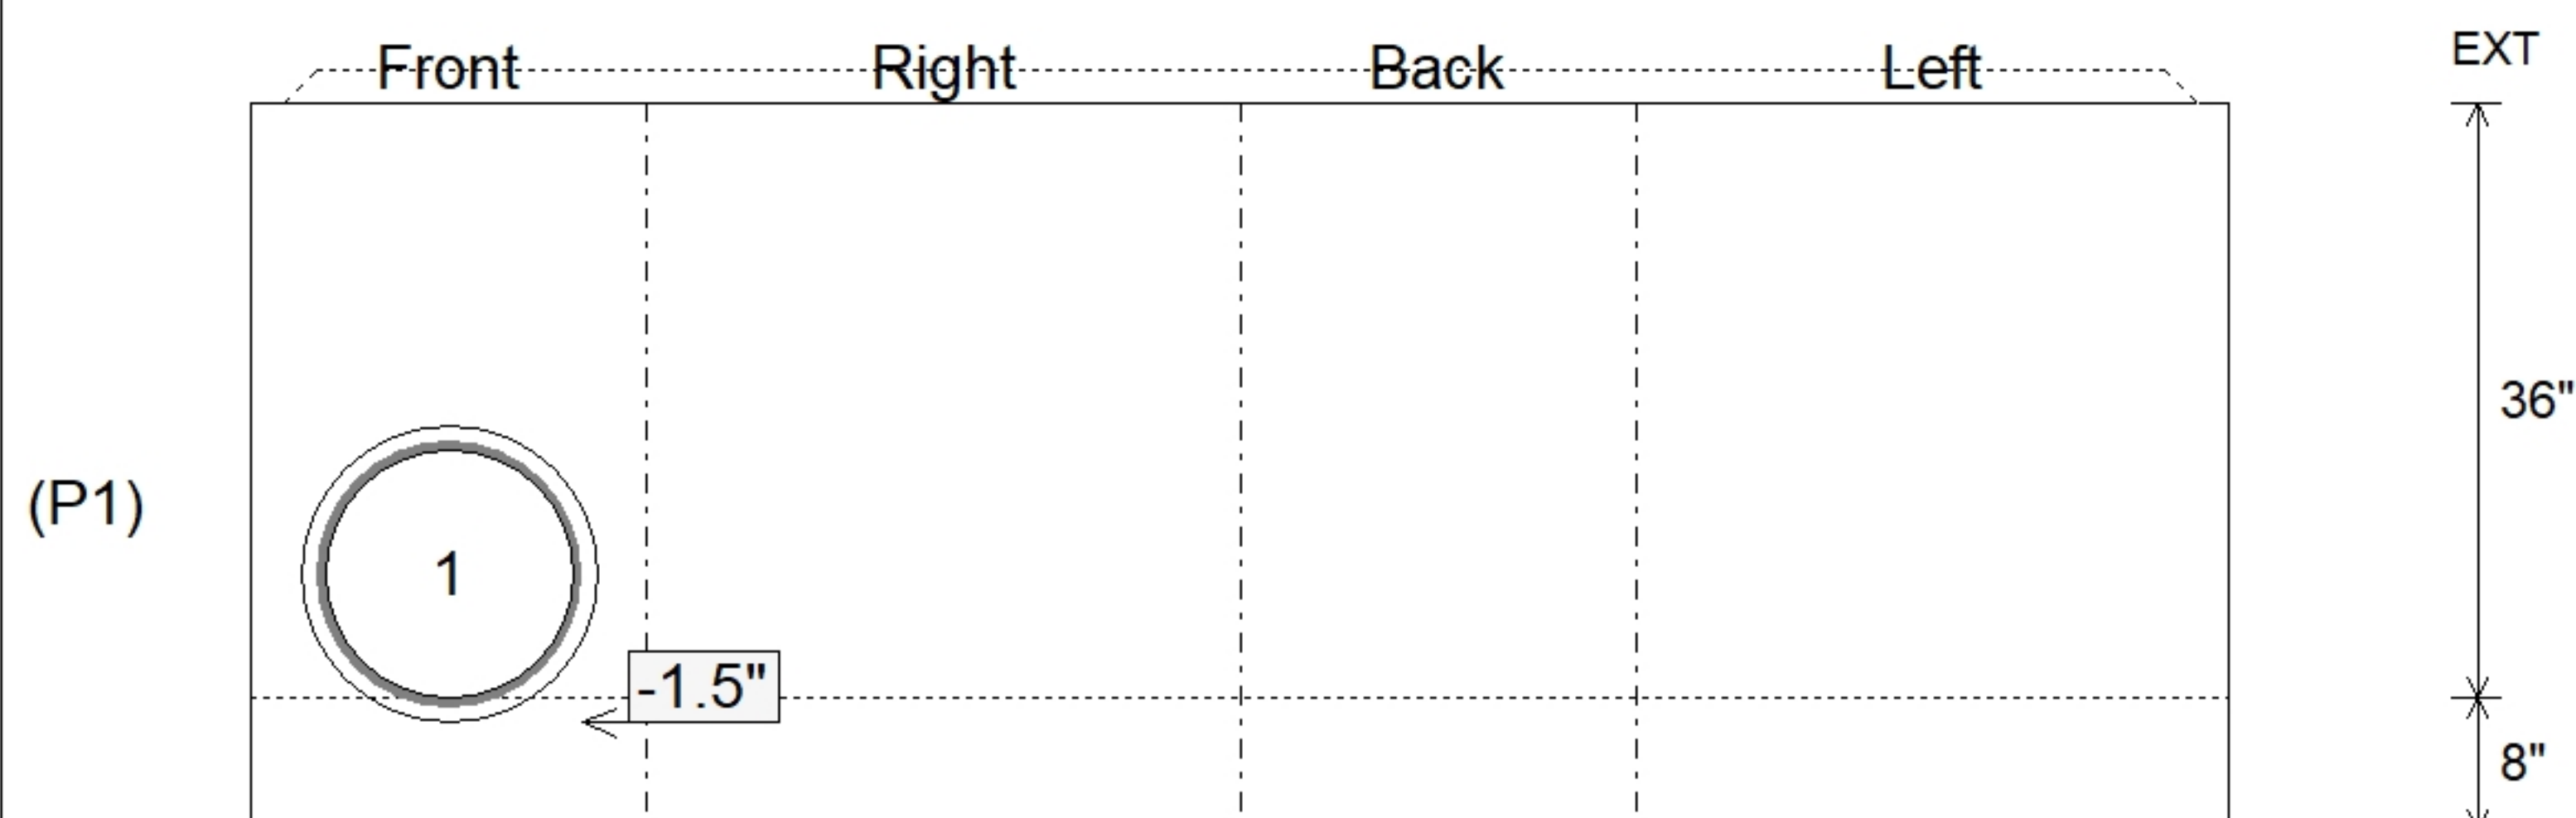

Submittal Drawing
7/29/2026 12:08:39 PM

SUBMITTAL
APPROVED BY: