


Job Name: 26-1635 - KYTC Oldham Co (261505) Job Location: Peewee Valley, KY Contractor: Cleary Construction, Inc.					Plant: 100 7/27/2026 11:36:17 AM		Tech: Jared - F PC: T. Ryan				
Structure ID: 51300R-97A CBIA											
P1		BX2436-08BVF		BOX BASE 8inW, 8inF, Variable Ht T/n							
P3) 24" x 120" - CB INLET KY A 10' TOP RIGHT F/G - 10" P2) 24" x 120" - CB INLET KY A 10' BOTTOM RIGHT T/G - 18" P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht T/n - 45" 1) CASTING - HOE KY-206 F/C (KY CBI A) 1) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 28"					3398 lb 5270 lb 5368 lb 206 lb 0 lb 0 lb ----- Structure Total: 14242 lb		Structure Notes: ** KYTC STATE PROJECT ** 1. PER KYTC CBI TYPE A / ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY-206 F/C (KY CBI A)). REINFORCING PER ASTM A615 (GRADE 60). - TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W. - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Rim: 799.35' Rim to Invert: 6.37' Slack: 3.44" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1	792.98'	0°	20"	24" CMP	25"	Hole 28	28"	26"	-2"	0"	
Invert 2	792.98'	180°	20"	24" CMP	25"	Hole 28	28"	26"	-2"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

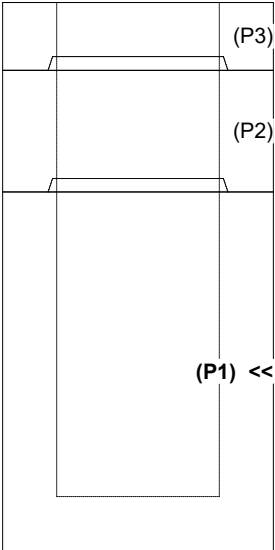


(P3)

(P2)

(P1) <<


RIGHT-SIDE UP VIEW (int. dimensions)

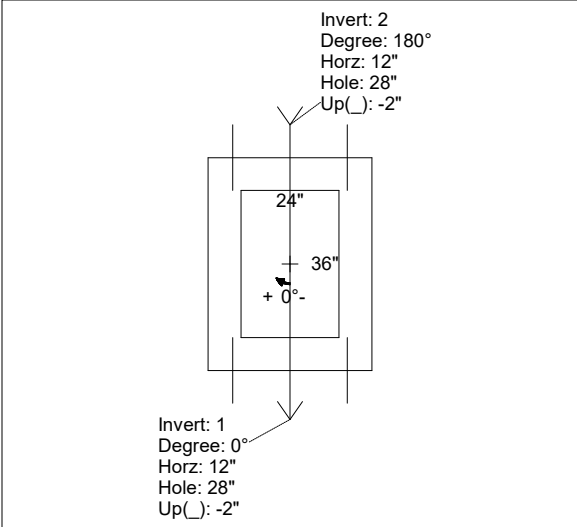

Invert: 2
Degree: 180°
Horz: 12"
Hole: 28"
Up(_): -2"

Invert: 1
Degree: 0°
Horz: 12"
Hole: 28"
Up(_): -2"


UPSIDE-DOWN VIEW (int. dimensions)

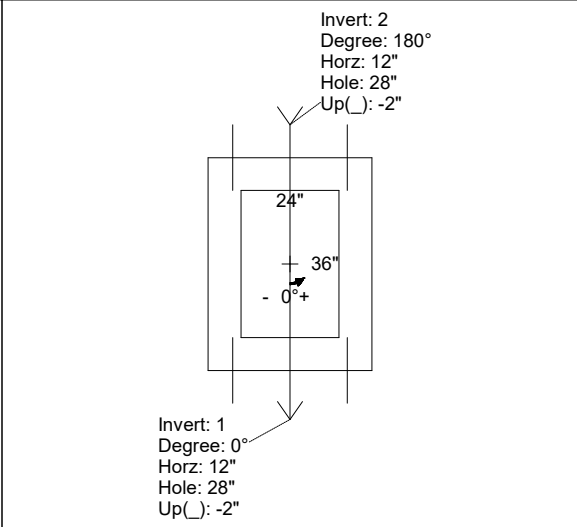

Invert: 2
Degree: 180°
Horz: 12"
Hole: 28"
Up(_): -2"

Invert: 1
Degree: 0°
Horz: 12"
Hole: 28"
Up(_): -2"

INSIDE WALL DIMENSIONS

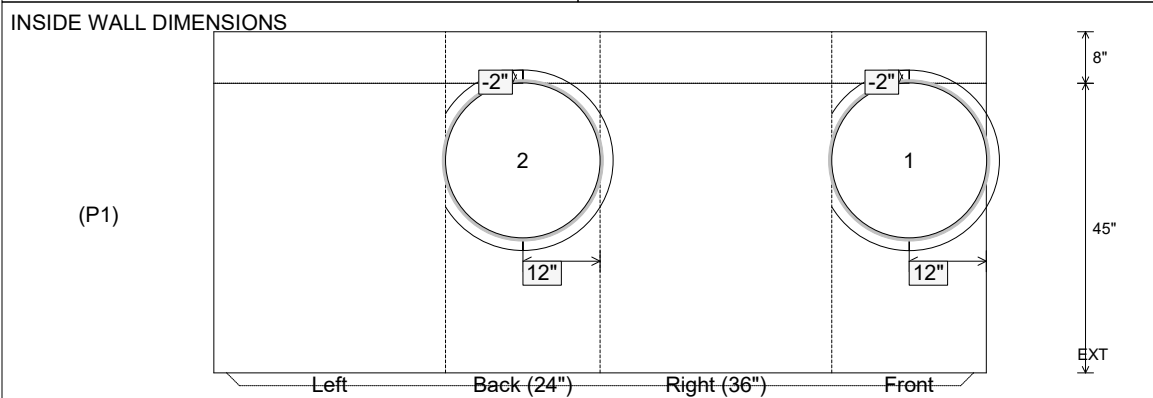

(P1)

Left Back (24") Right (36") Front

8"

45"

EXT

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 45" Height (Ext): 53"	Weight (Net): 5368 lb Volume (Net): 1.37cu.yd
----------------------------------	---------------------------------	--	--	--