

Job Name: 26-1635 - KYTC Oldham Co (261505)
Job Location: Pee wee Valley, KY
Contractor: Cleary Construction, Inc.

Plant: 100

8/12/2026 11:10:02 AM

Tech: Jared - F

PC: T. Ryan



Structure ID: 152527-153 ST- JB

P2 BX4848_08LD08

CB FLAT TOP 8"W SOLID F/F

P2) 48" x 48" - CB FLAT TOP 8"W SOLID F/F - 8"

P1) 48" x 48" - BOX BASE 8inW, 8inF F/h - 48"

1) 48" x 48" - Conseal CS-102 1.00"

1) Hole - 32

2) Hole - 40

2750 lb

7653 lb

0 lb

0 lb

0 lb

Structure Total:

10403 lb

Structure Notes:

**** KYTC STATE PROJECT ****

1. KYTC JUNCTION BOX / PER ASTM C913 SPEC'S.

2. CONCRETE = 4,000 PSI AT 28 DAYS.


3. SOLID TOP SLAB - NO CASTING.

REINFORCING PER ASTM A615 (GRADE 60).


- TOP SLAB (As. 62) #5 BARS AT 6" C.C.E.W.

- WALLS (As .31) #5 BARS AT 12" C.C.E.W.

- FLOOR (As .31) #5 BARS AT 12: C.C.E.W.

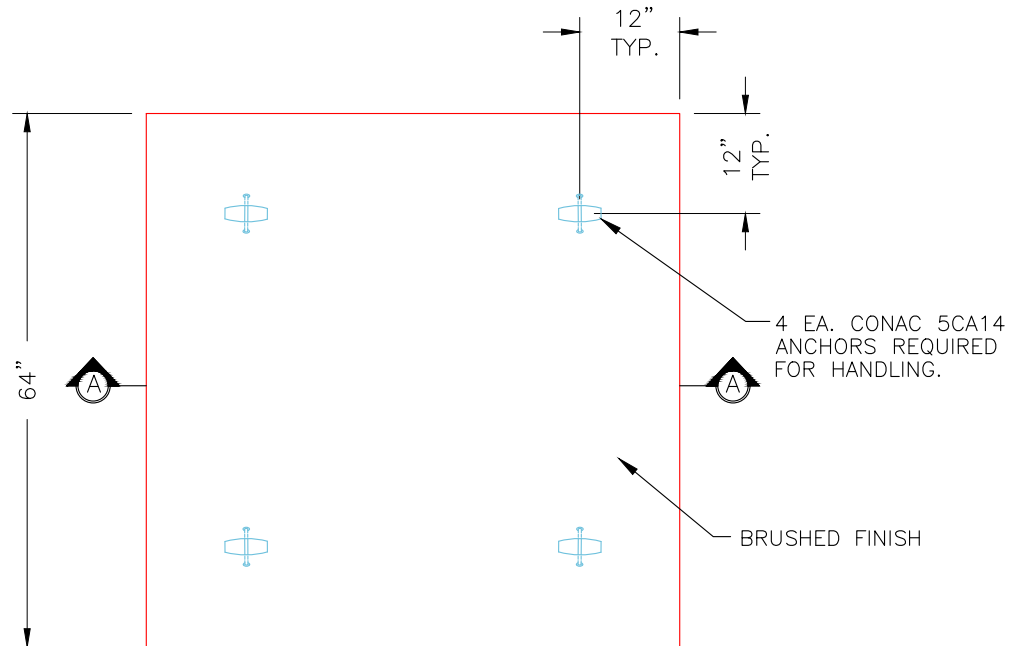

PLAN VIEW

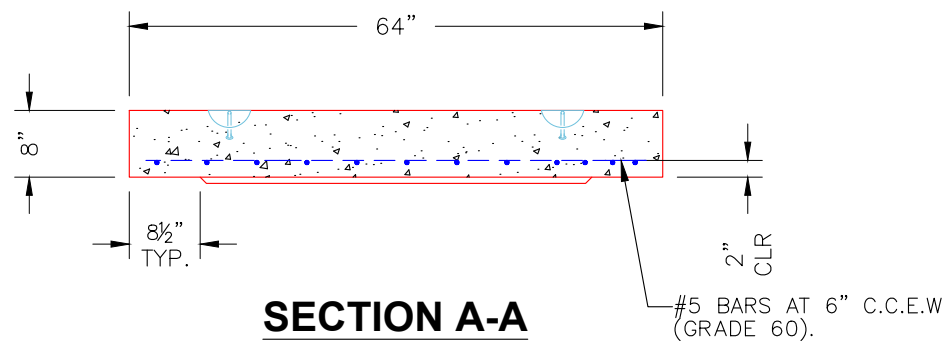

SECTION A-A

NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).

2. CONCRETE: 4,000 PSI AT 28 DAYS.

3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 2750 lb
Volume (Net): 0.7cu.yd