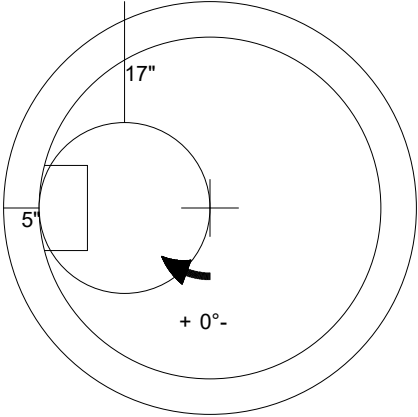



Job Name: 26-1635 - KYTC Oldham Co (261505) Job Location: Peewee Valley, KY Contractor: Cleary Construction, Inc.		Plant: 100 8/12/2026 11:09:59 AM	Tech: Jared - F PC: T. Ryan		
Structure ID: 15610-145 MHB					
P2 MH048CN42		ECC CONE w/ 24" HOLE F/G			
P4) 24" - CASTING HEIGHT - 8" P3) 24" - GRADE RING F/F - 3" P2) 48" - ECC CONE w/ 24" HOLE F/G - 42" P1) 48" - MH BASE T/n - 72" 1) 48" - Conseal CS-102 1.00" 2) 24" - Conseal CS-102 1.00" 1) Hole - 34 1) Hole - 28 10) MH Step ML-10-TDS-NCR - 10"		0 lb 202 lb 3200 lb 5672 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 9075 lb	Structure Notes: . **KYTC STATE PROJECT** 1. PER KYTC MH B / ASTM C478 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING SUPPLIED BY OTHERS (HOE KY-510 F/C (KY TY.2)). . REINFORCING PER ASTM A615 (GRADE 60.) - CONE (As.12). - RISER/WALLS (As.12). - FLOOR (As.31) #5 BARS AT 12" C.C.E.W.		
					
 48" - ECC CONE w/ 24" HOLE F/G - 42" - (P2)					
Coating (Int): Coating (Ext):		Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 42"	Weight (Net): 3200 lb Volume (Net): 0.5cu.yd