

Job Name: 26-1635 - KYTC Oldham Co (261505)
Job Location: Peewee Valley, KY
Contractor: Cleary Construction, Inc.

Plant: 100

8/12/2026 11:09:59 AM

Tech: Jared - F

PC: T. Ryan



Structure ID: 15610-145 MHB

P3 GR3

GRADE RING F/F

P4) 24" - CASTING HEIGHT - 8"
P3) 24" - GRADE RING F/F - 3"
P2) 48" - ECC CONE w/ 24" HOLE F/G - 42"
P1) 48" - MH BASE T/n - 72"
1) 48" - Conseal CS-102 1.00"
2) 24" - Conseal CS-102 1.00"
1) Hole - 34
1) Hole - 28
10) MH Step ML-10-TDS-NCR - 10"

Structure Total:

0 lb
202 lb
3200 lb
5672 lb
0 lb
0 lb
0 lb
0 lb
0 lb
0 lb
9075 lb


Structure Notes:

****KYTC STATE PROJECT****

1. PER KYTC MH B / ASTM C478 SPEC'S.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING SUPPLIED BY OTHERS (HOE KY-510 F/C (KY TY.2)).


REINFORCING PER ASTM A615 (GRADE 60.)

- CONE (As.12).
- RISER/WALLS (As.12).
- FLOOR (As.31) #5 BARS AT 12" C.C.E.W.

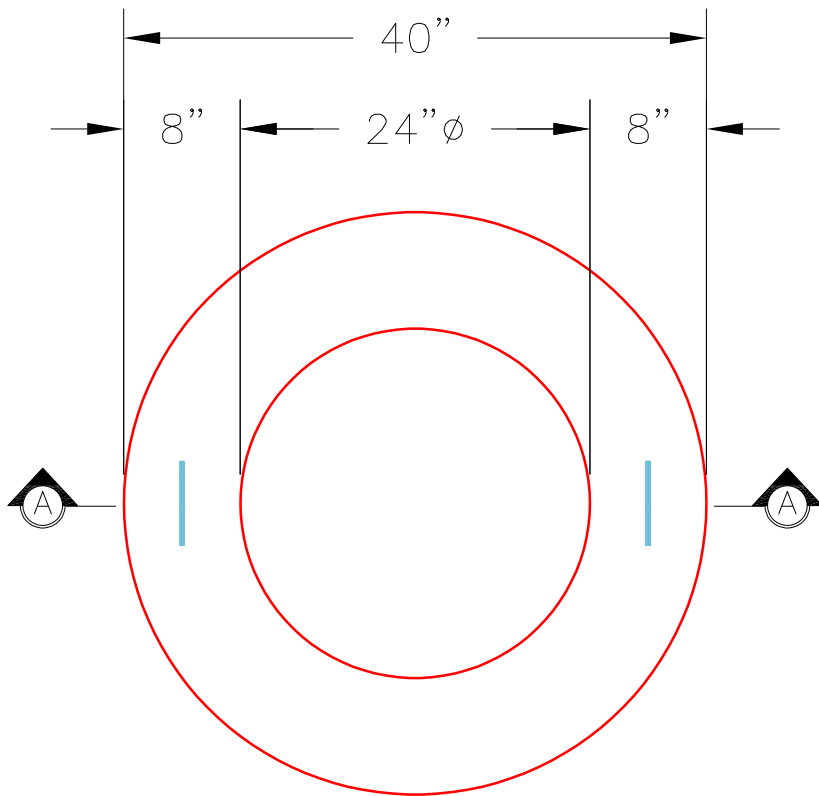

PLAN VIEW


2x CONAC WRA016 WIRE
ROPE LIFTING ANCHORS

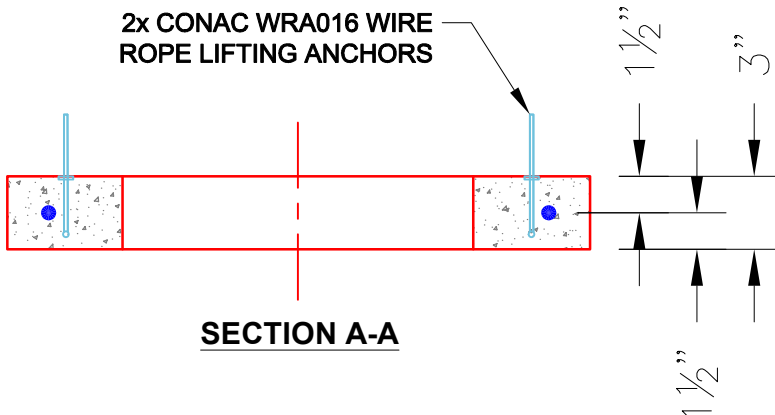

SECTION A-A

NOTES:

1. GRADE RINGS MEET OR EXCEED THE FOLLOWING SPECIFICATIONS:
 - CONCRETE: 4,000 PSI @ 28 DAYS.
 - REINFORCING: (1) #3 HOOP CENTERED (GRADE 60)
2. WEIGHT: 3" 202 Lbs.

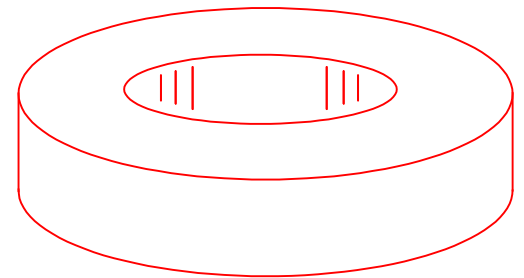

ISOMETRIC VIEW

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 3"

Weight (Net): 202 lb
Volume (Net): 0.05cu.yd