

Contractor: Cleary Construction, Inc.

TECH: Jared - F

Plant: 100



Rim to Invert: 6'


Floor Height: 6"

Slack: 0"

- FLOOR (As.31) #5 BARS AT 12" C.C.E.W.


0 lb

Structure Total: 6552 lb

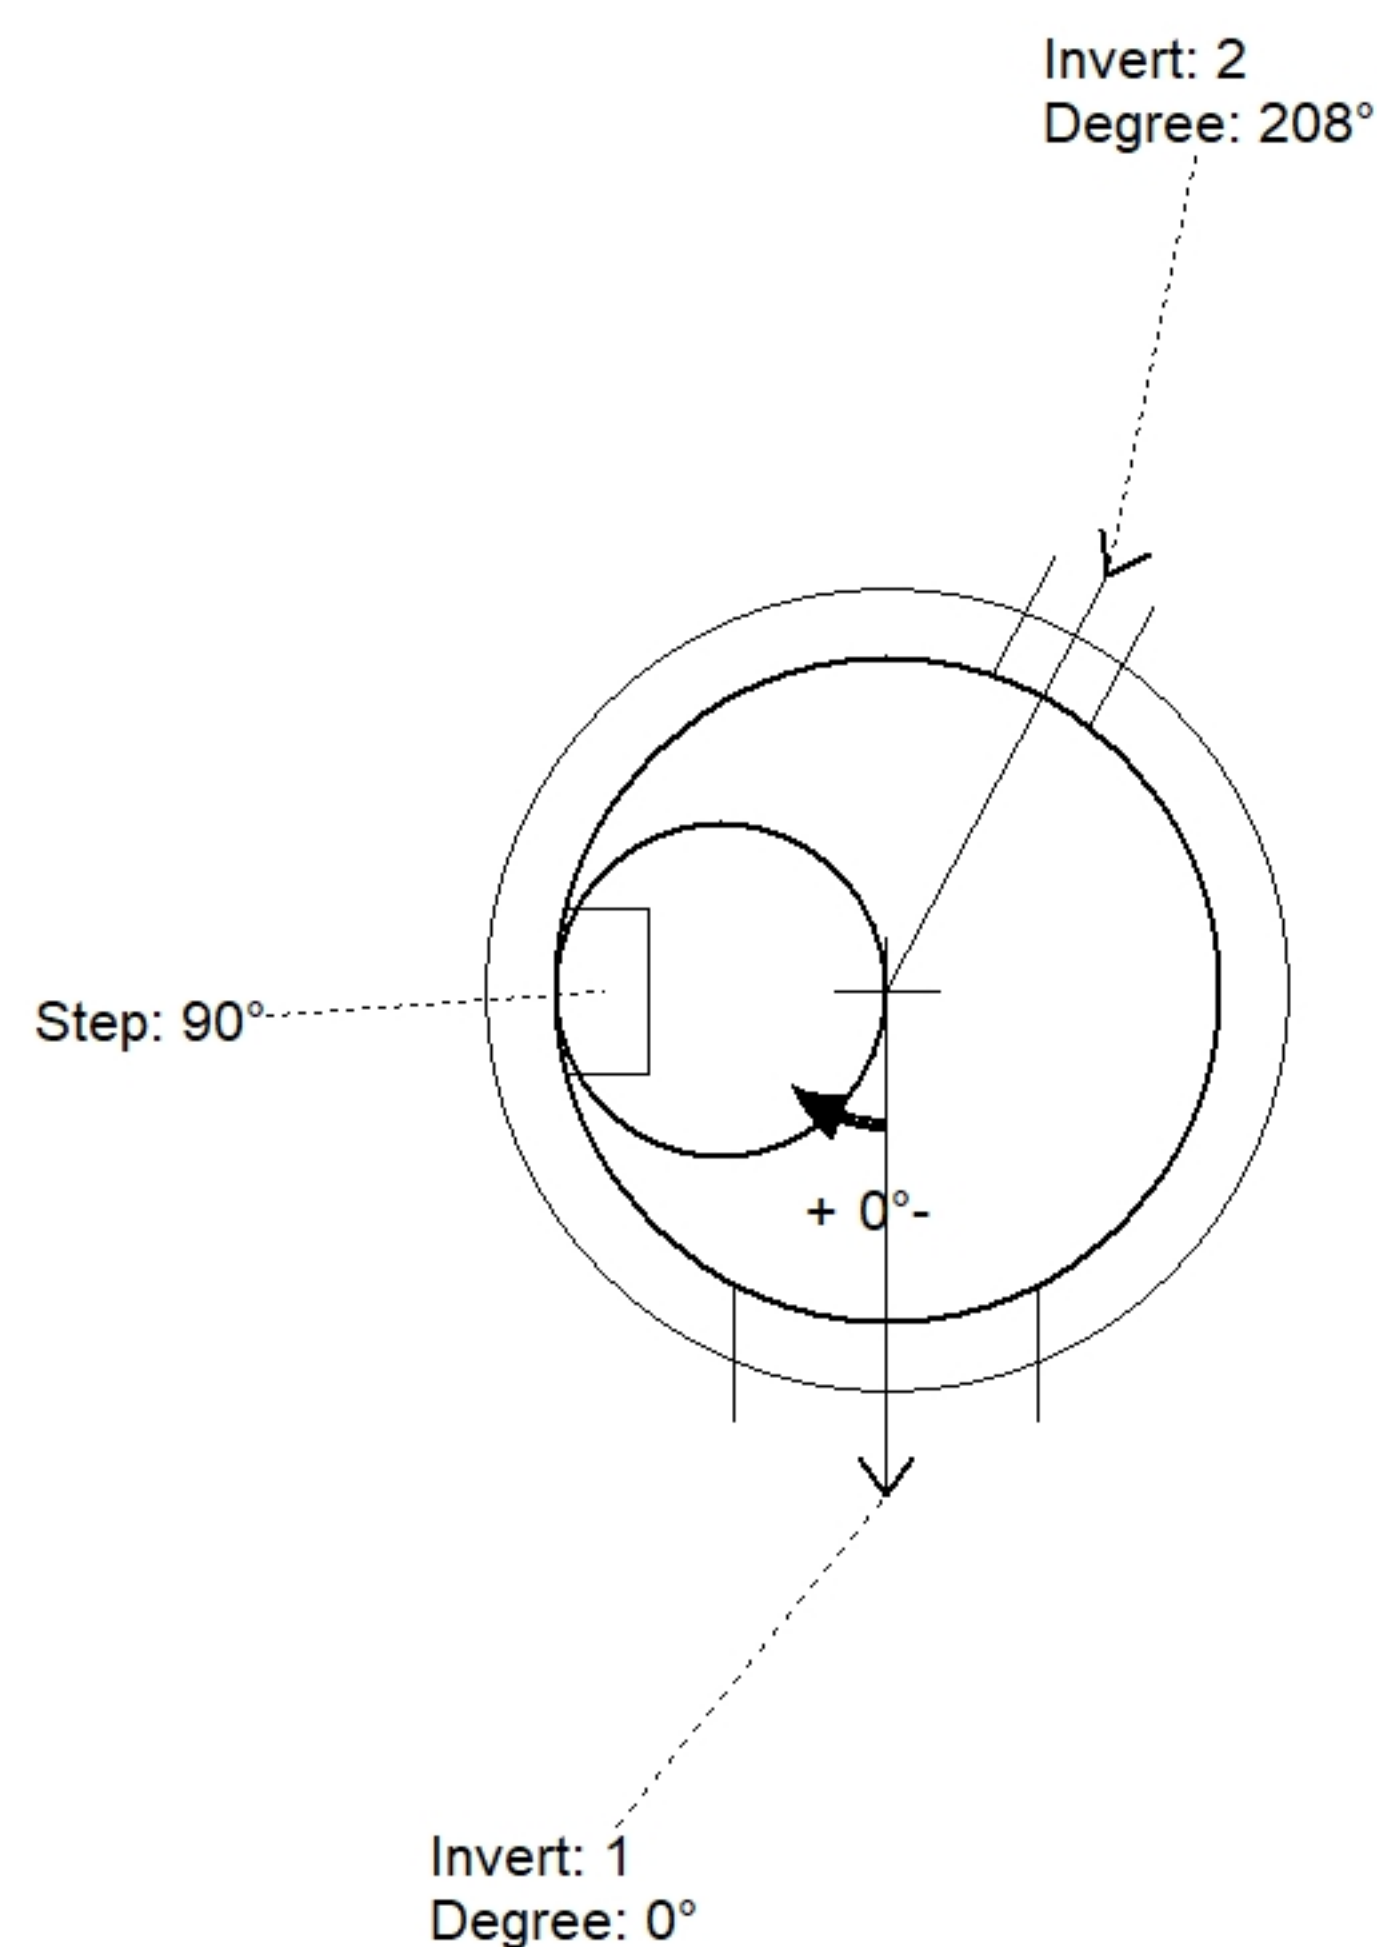

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (')	Ref
Rim	794.69'							
Reducer								
Invert 1	788.69'	0°	18" CMP	19"	22"	Hole 22	0"	P1
Invert 2	792.52'	208°	6" HDPE (perf pipe)	6.9"	8"	Hole 8	46.96"	P1
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

Default - Interior Dimensions

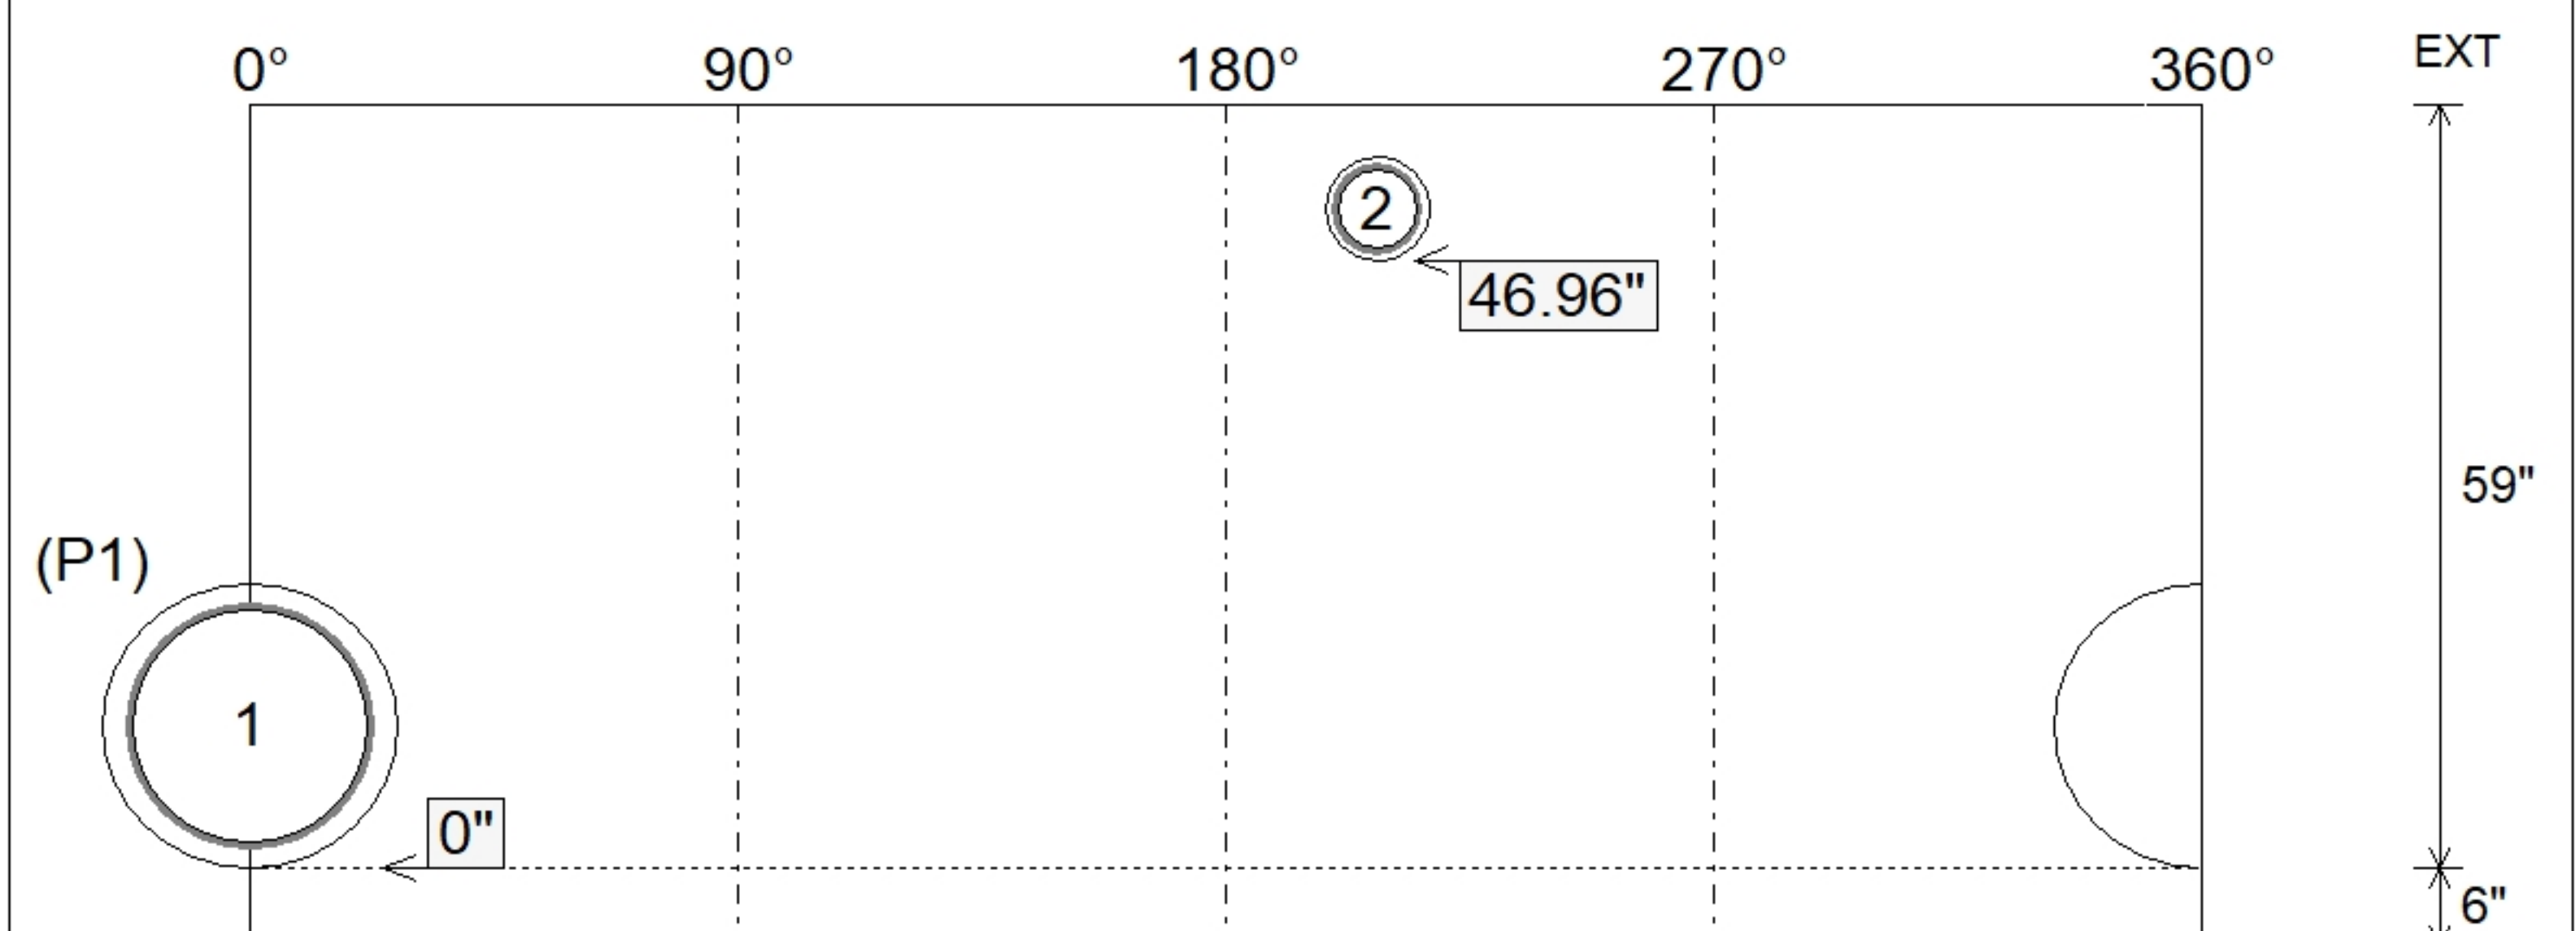

Submittal Drawing
8/17/2026 2:01:39 PM

SUBMITTAL
APPROVED BY: