

Job Name: 26-1635 - KYTC Oldham Co (261505)
Job Location: Peewee Valley, KY
Contractor: Cleary Construction, Inc.

Plant: 100

8/14/2026 1:21:13 PM

Tech: Jared - F

PC: T. Ryan



Structure ID: 37392-154 SBIA

P2 BXLD4848FL-S

BX FLAT LID 8inW SOLID F/F

P2) 48" x 48" - BX FLAT LID 8inW SOLID F/F - 8"
P1) 48" x 48" - BX BASE w/FLANGE 08W/12F/14EF F/n - 36"
1) 48" x 48" - Conseal CS-102 1.00"
1) Hole - 18
3) Hole - 8

Structure Total:

2758 lb
13657 lb
0 lb
0 lb
0 lb

16415 lb


Structure Notes:

****KYTC STATE PROJECT****


1. PER KYTC SPRING BOX INLET A / ASTM C478 SPEC'S.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. SOLID TOP SLAB - NO CASTING.

REINFORCING PER ASTM A615 (GRADE 60.)

- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- WALLS (As .12) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

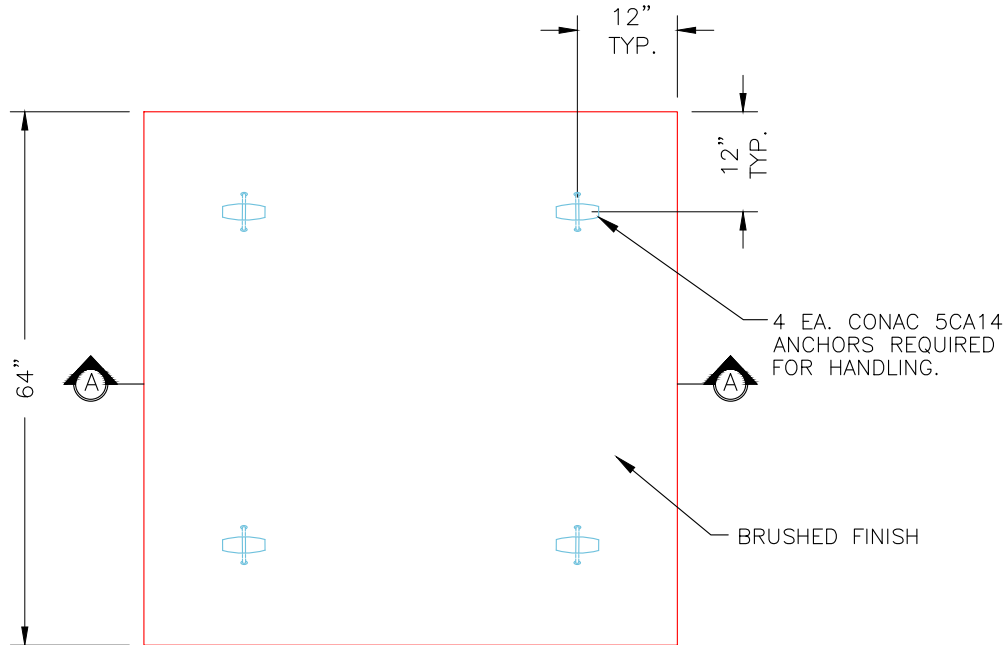

PLAN VIEW

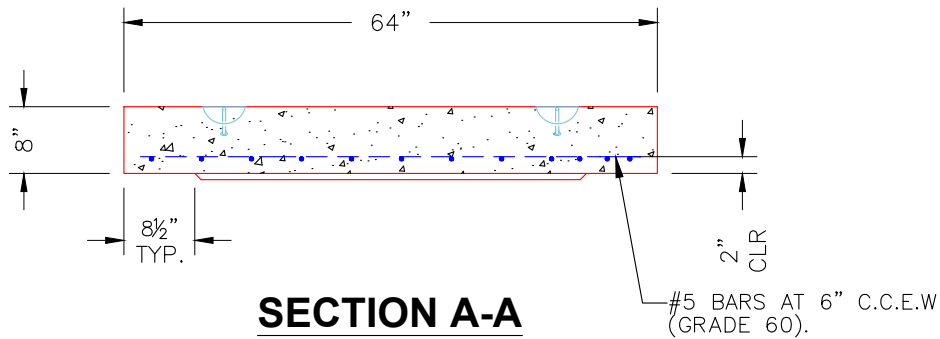

SECTION A-A

NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 2758 lb
Volume (Net): 0.7cu.yd