




Job Name: 26-1635 - KYTC Oldham Co (261505) Job Location: Peewee Valley, KY Contractor: Cleary Construction, Inc.					Plant: 100 8/14/2026 1:20:41 PM		Tech: Jared - F PC: T. Ryan			
Structure ID: 38900-133 DBI13G										
P1 BX24300808VF			BOX BASE 8inW, 8inF, Variable Ht T/n							
P4) 15" x 27" - P.I.P. - BY OTHERS - 8" P3) 24" x 30" - CB FLAT TOP 8"W w/15"x27" HOLE F/F - 8" P2) 24" x 30" - BOX RISER 8inW F/G - 18" P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht T/n - 38" 2) 24" x 30" - Conseal CS-102 1.00" 1) 15" x 27" - Conseal CS-102 1.00" 1) Hole - 22 1) Hole - 20 2) Hole - 4					0 lb 963 lb 1675 lb 4340 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 6979 lb		Structure Notes: **KYTC STATE PROJECT** 1. KYTC DBI TYPE 13G / ASTM C-913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. STUB #5 BARS 6" OUT TOP OF SLAB (SPA@12"C/C). 4. CASTING SUPPLIED BY OTHERS (HOE KY-230-G F/G (GRADE)). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. (DOUBLE MAT) - WALLS (As .31) #5 BARS AT 12" C.C.E.W.. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 780.63'		Rim to Invert: 6'		Slack: 0"		Sump: 0"		Step Position:		
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	774.63'	90°	23"	18" CMP	19"	Hole 22	22"	22"	-2"	0"
Invert 2	774.63'	270°	23"	15" CMP	16"	Hole 20	20"	20"	-2.5"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

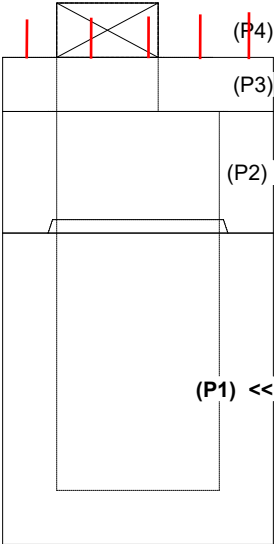


RIGHT-SIDE UP VIEW (int. dimensions)

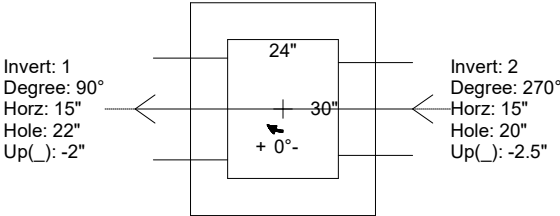

UPSIDE-DOWN VIEW (int. dimenions)

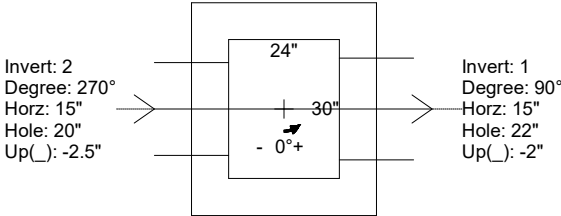

INSIDE WALL DIMENSIONS

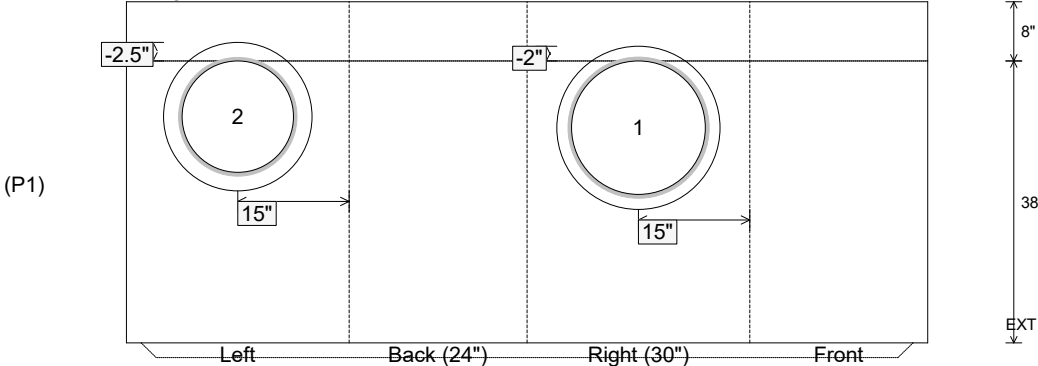

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 38" Height (Ext): 46"	Weight (Net): 4340 lb Volume (Net): 1.11cu.yd
----------------------------------	---------------------------------	--	--	--