




Job Name: 26-1635 - KYTC Oldham Co (261505) Job Location: Pee wee Valley, KY Contractor: Cleary Construction, Inc.					Plant: 100 8/14/2026 1:20:46 PM		Tech: Jared - F PC: T. Ryan				
Structure ID: 400-137 DBI13G											
P1 BX2430-08BA30		BOX BASE 8inW, 8inF F/n									
P3) 15" x 27" - P.I.P. - BY OTHERS - 8" P2) 24" x 30" - CB FLAT TOP 8"W w/15"x27" HOLE F/F - 8" P1) 24" x 30" - BOX BASE 8inW, 8inF F/n - 30" 1) 24" x 30" - Conseal CS-102 1.00" 1) 15" x 27" - Conseal CS-102 1.00" 1) Hole - 18 2) Hole - 4					0 lb 963 lb 3861 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 4824 lb		Structure Notes: **KYTC STATE PROJECT** 1. KYTC DBI TYPE 13G / ASTM C-913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. STUB #5 BARS 6" OUT TOP OF SLAB (SPA@12"C/C). 4. CASTING SUPPLIED BY OTHERS (HOE KY-230-G F/G (GRADE)). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. (DOUBLE MAT) - WALLS (As .31) #5 BARS AT 12" C.C.E.W.. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Rim: 819.15'		Rim to Invert: 3.85'		Slack: 0.2"		Sump: 0"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	815.3'	15°	22"	15" CMP	16"	Hole 18	18"	18.635"	-1.5"	-4"	
Invert 2	817.13'	90°	23"	4" WEEP HOLE	4"	Hole 4	4"	4"	22"	0"	
Invert 3	817.13'	270°	23"	4" WEEP HOLE	4"	Hole 4	4"	4"	22"	0"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

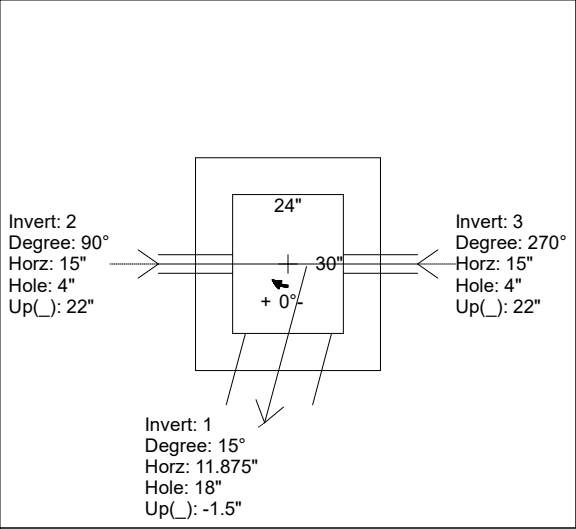

RIGHT-SIDE UP VIEW (int. dimensions)

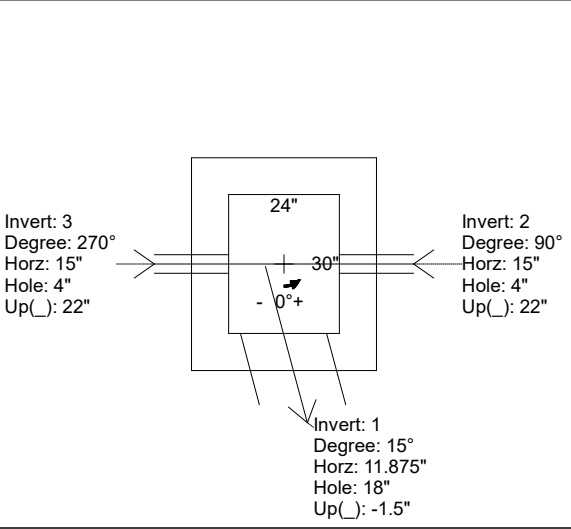

UPSIDE-DOWN VIEW (int. dimensions)

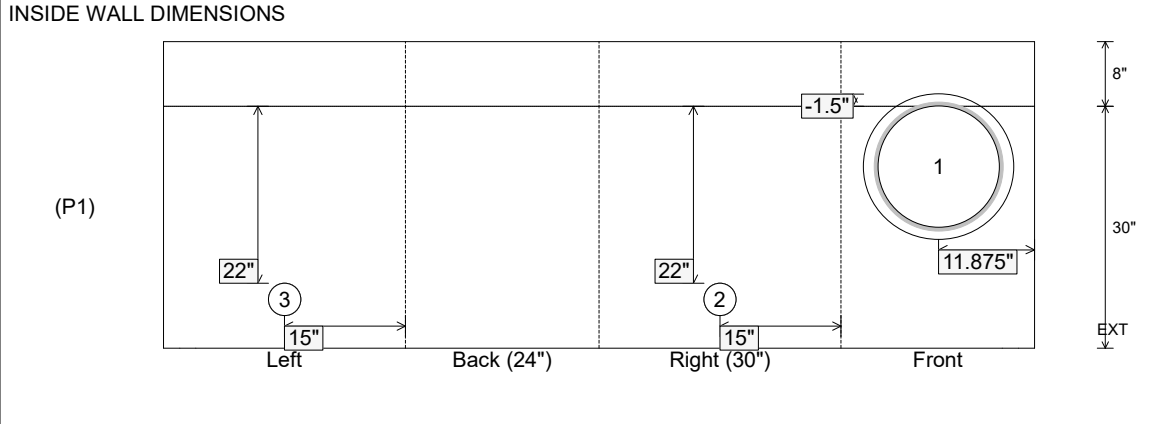

INSIDE WALL DIMENSIONS

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 30" Height (Ext): 38"	Weight (Net): 3861 lb Volume (Net): 0.99cu.yd
----------------------------------	-------------------------------	--	--	--