



Job Name: 26-1635 - KYTC Oldham Co (261505) Job Location: Peewee Valley, KY Contractor: Cleary Construction, Inc.					Plant: 100 8/14/2026 1:20:46 PM		Tech: Jared - F PC: T. Ryan			
Structure ID: 4054-139 DBI13G										
P1		BX2430-08BA48		BOX BASE 8inW, 8inF T/n						
P4) 15" x 27" - P.I.P. - BY OTHERS - 8" P3) 24" x 30" - CB FLAT TOP 8"W w/15"x27" HOLE F/F - 8" P2) 24" x 30" - BOX RISER 8inW F/G - 18" P1) 24" x 30" - BOX BASE 8inW, 8inF T/n - 48" 2) 24" x 30" - Conseal CS-102 1.00" 1) 15" x 27" - Conseal CS-102 1.00" 2) Hole - 22 2) Hole - 4					0 lb 963 lb 1675 lb 5236 lb 0 lb 0 lb 0 lb 0 lb 0 lb 7874 lb		Structure Notes: **KYTC STATE PROJECT** 1. KYTC DBI TYPE 13G / ASTM C-913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. STUB #5 BARS 6" OUT TOP OF SLAB (SPA@12"C/C). 4. CASTING SUPPLIED BY OTHERS (HOE KY-230-G F/G (GRADE)). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. (DOUBLE MAT) - WALLS (As .31) #5 BARS AT 12" C.C.E.W.. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 776.34' Rim to Invert: 6.84' Slack: 0.08" Sump: 0" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	769.5'	90°	23"	18" CMP	19"	Hole 22	22"	22"	-2"	0"
Invert 2	769.5'	270°	23"	18" CMP	19"	Hole 22	22"	22"	-2"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

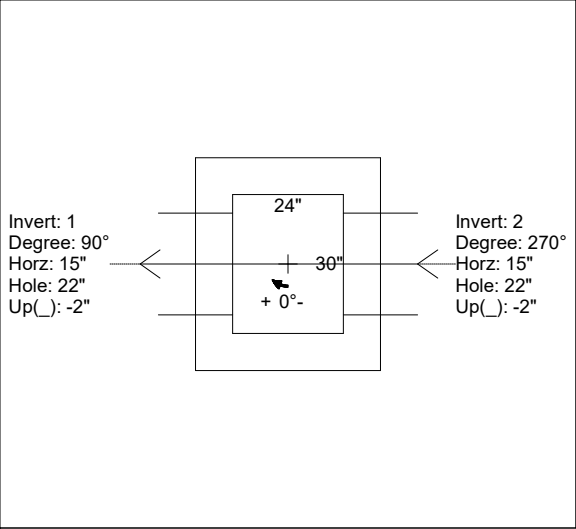

UPSIDE-DOWN VIEW (int. dimensions)

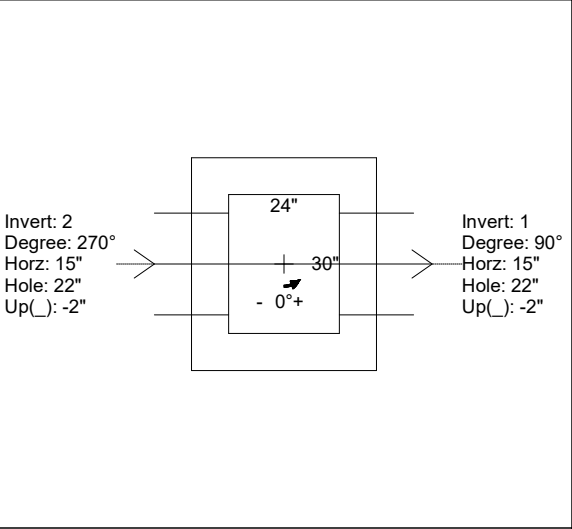

INSIDE WALL DIMENSIONS

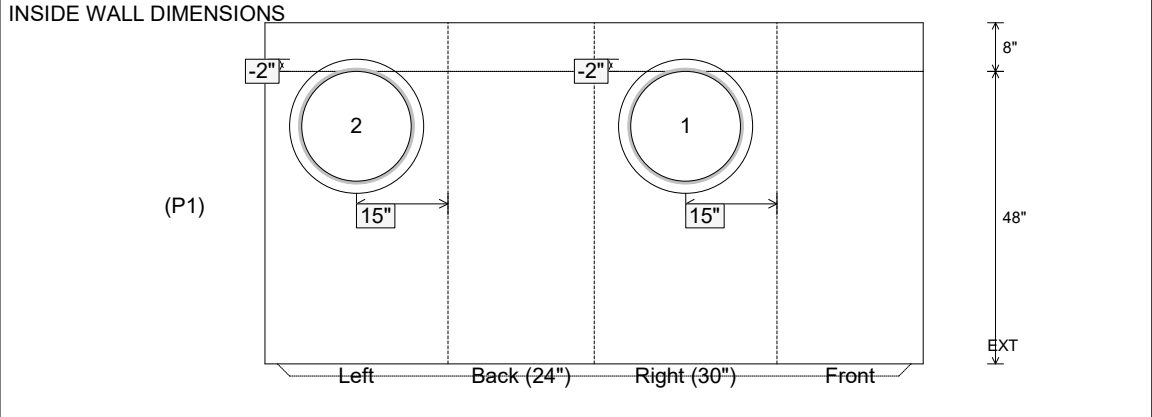

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 48" Height (Ext): 56"	Weight (Net): 5236 lb Volume (Net): 1.34cu.yd
----------------------------------	---------------------------------	--	--	--