

Job Name: 26-1635 - KYTC Oldham Co (261505)

Job Location: Pee wee Valley, KY

Contractor: Cleary Construction, Inc.

Plant: 100

8/12/2026 11:09:24 AM

Tech: Jared - F

PC: T. Ryan



Structure ID: 50650-152 ST- JB1

P1 BX2424-08BAVF

BOX BASE 8inW, 8inF, Variable Ht T/n

P4) CASTING (cast in) - 0

P3) 24" x 24" - BX FLAT LID 8inW SPEC. (KY JB-B1) F/F - 8"

P2) 24" x 24" - BOX RISER 8inW F/G - 24"

P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht T/n - 47"

2) 24" x 24" - Conseal CS-102 1.00"

1) 24" - Conseal CS-102 1.00"

2) Hole - 18

1) Hole - 16

0 lb

770 lb

2062 lb

4636 lb

0 lb

0 lb

0 lb

0 lb

Structure Total: 7469 lb

Structure Notes:

***KYTC STATE PROJECT**

1. KYTC JUNCTION BOX B1 / PER ASTM C913 SPEC'S.

2. CONCRETE = 4,000 PSI AT 28 DAYS.

3. TOP SLAB w KYTC TYPE 1 F/C CAST-IN.

REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As. 62) #5 BARS AT 6" C.C.E.W.

- WALLS (As .31) #5 BARS AT 12" C.C.E.W.

- FLOOR (As .31) #5 BARS AT 12: C.C.E.W.

Rim: 807.95'

Rim to Invert: 6.6'


Slack: 0.2"

Sump: 0"


Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1	801.35'	0°	20"	15" CMP	16"	Hole 18	18"	18"	-1.5"	0"
Invert 2	801.35'	90°	20"	15" CMP	16"	Hole 18	18"	18"	-1.5"	0"
Invert 3	801.35'	180°	20"	12" CMP	13"	Hole 16	16"	16"	-2"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

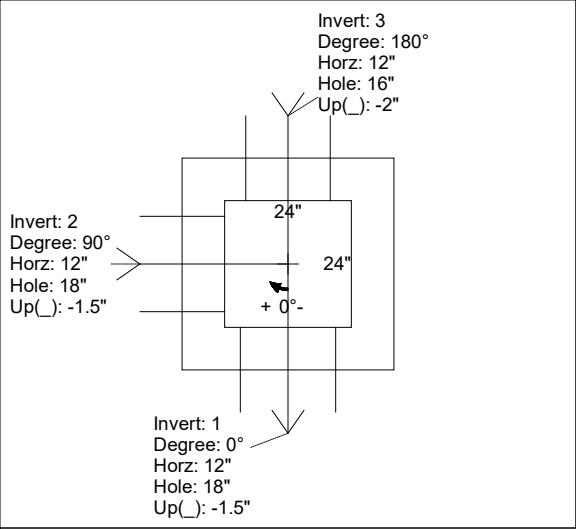

UPSIDE-DOWN VIEW (int. dimensions)

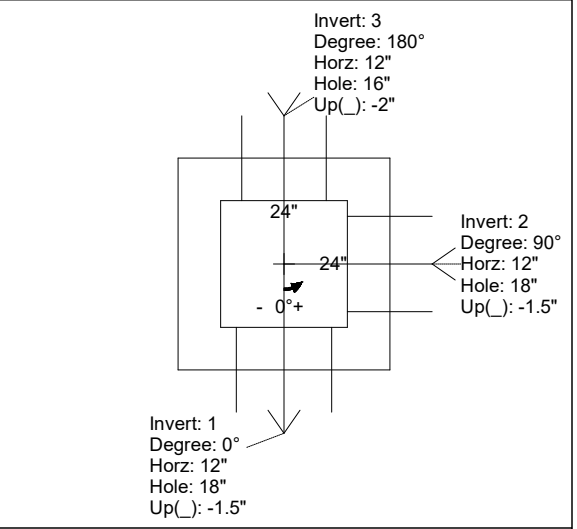

INSIDE WALL DIMENSIONS

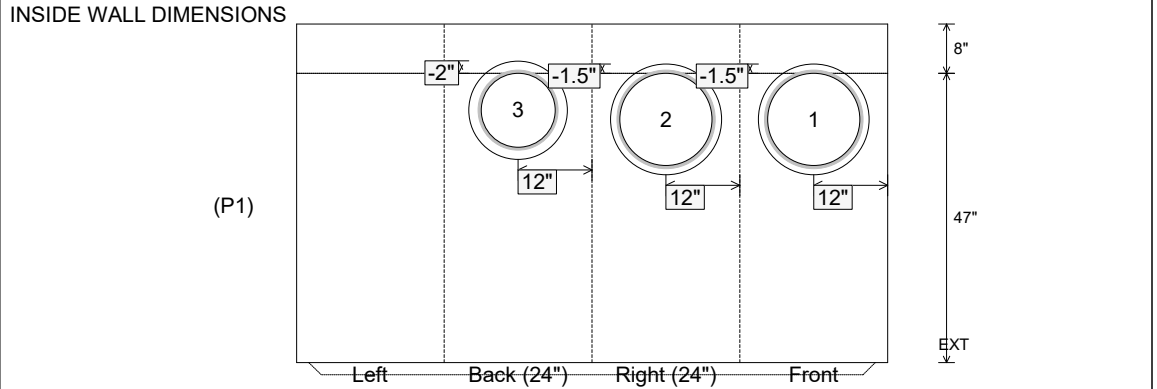

Coating (Int):

Coating (Ext):

Seam Up: Tongue

Seam Dn: n/a

Wall Thickness: 8"

Floor Height: 8"

Height (Int): 47"

Height (Ext): 55"

Weight (Net): 4636 lb

Volume (Net): 1.18cu.yd