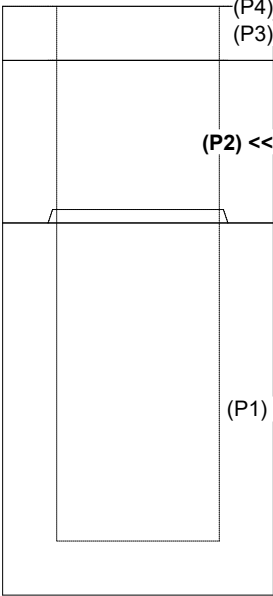

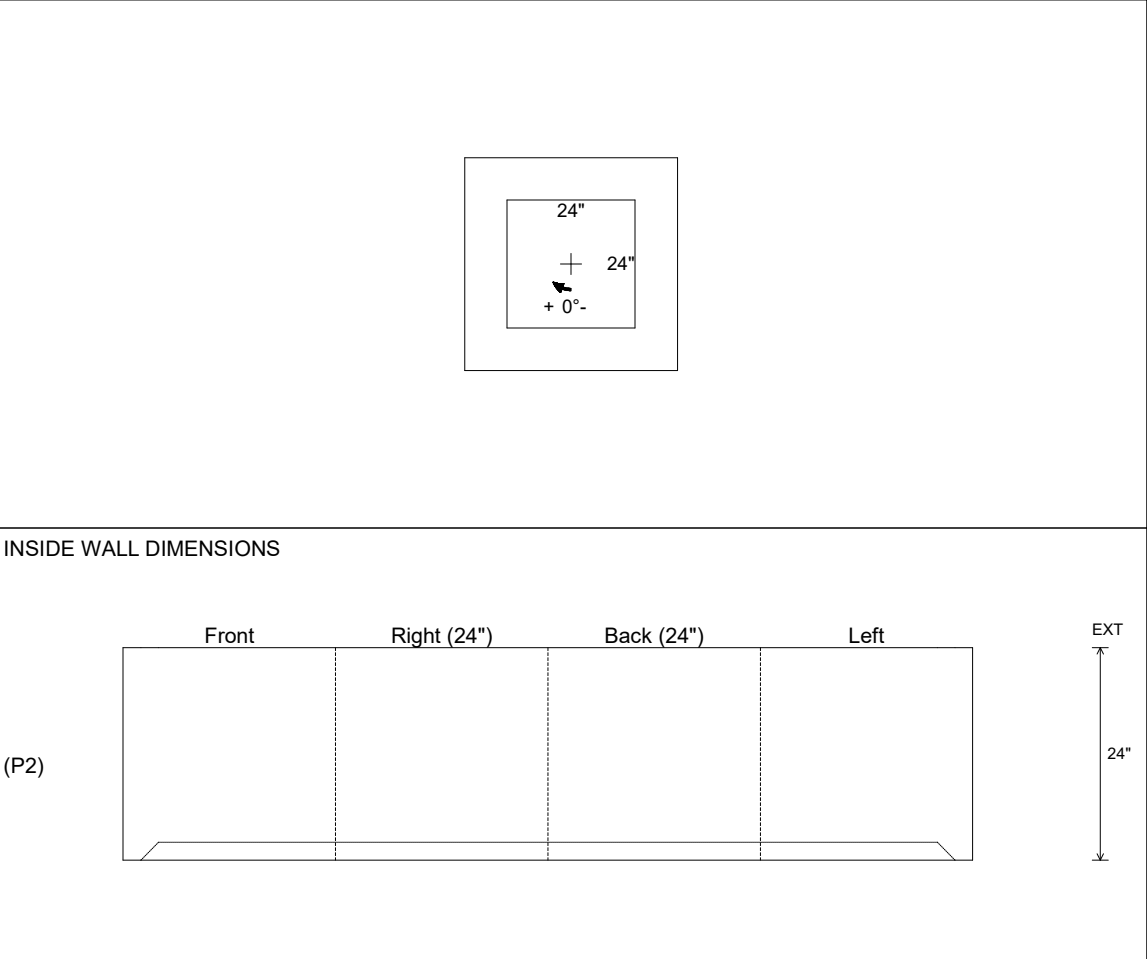
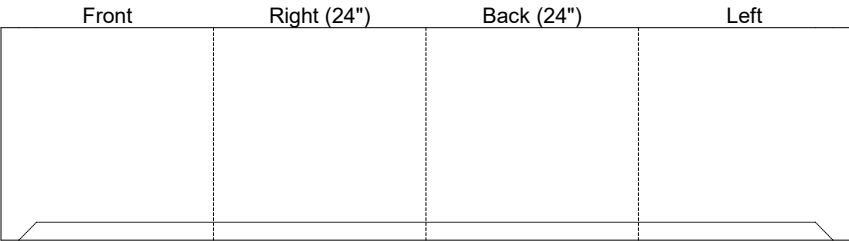


Job Name: 26-1635 - KYTC Oldham Co (261505) Job Location: Peewee Valley, KY Contractor: Cleary Construction, Inc.					Plant: 100 8/12/2026 11:10:36 AM		Tech: Jared - F PC: T. Ryan				
Structure ID: 50650-152 ST- JB1											
P2		BX2424-08R24		BOX RISER 8inW F/G							
P4) CASTING (cast in) - 0 P3) 24" x 24" - BX FLAT LID 8inW SPEC. (KY JB-B1) F/F - 8" P2) 24" x 24" - BOX RISER 8inW F/G - 24" P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht T/n - 47" 2) 24" x 24" - Conseal CS-102 1.00" 1) 24" - Conseal CS-102 1.00" 2) Hole - 18 1) Hole - 16						0 lb 770 lb 2062 lb 4636 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 7469 lb		Structure Notes: . ***KYTC STATE PROJECT** 1. KYTC JUNCTION BOX B1 / PER ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. TOP SLAB w KYTC TYPE 1 F/C CAST-IN. . REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As. 62) #5 BARS AT 6" C.C.E.W. - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12: C.C.E.W.			
Rim: 807.95' Rim to Invert: 6.6' Slack: 0.2" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)											
											
INSIDE WALL DIMENSIONS											
											
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: Groove		Wall Thickness: 8" Floor Height: 0"		Height (Int): 24" Height (Ext): 24"		Weight (Net): 2062 lb Volume (Net): 0.53cu.yd	