

Job Name: 26-1635 - KYTC Oldham Co (261505)
Job Location: Peewee Valley, KY
Contractor: Cleary Construction, Inc.

Plant: 100

8/12/2026 11:10:02 AM

Tech: Jared - F

PC: T. Ryan



Structure ID: 50650-152 ST- JB1

P3 BXLD2424FL-24

BX FLAT LID 8inW SPEC. (KY JB-B1) F/F

P4) CASTING (cast in) - 0
P3) 24" x 24" - BX FLAT LID 8inW SPEC. (KY JB-B1) F/F - 8"
P2) 24" x 24" - BOX RISER 8inW F/G - 24"
P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht T/n - 47"
2) 24" x 24" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
2) Hole - 18
1) Hole - 16

Structure Total:

0 lb
770 lb
2062 lb
4636 lb
0 lb
0 lb
0 lb
0 lb
7469 lb

Structure Notes:

***KYTC STATE PROJECT**

1. KYTC JUNCTION BOX B1 / PER ASTM C913 SPEC'S.

2. CONCRETE = 4,000 PSI AT 28 DAYS.


3. TOP SLAB w KYTC TYPE 1 F/C CAST-IN.

REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.

- WALLS (As .31) #5 BARS AT 12" C.C.E.W.

- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

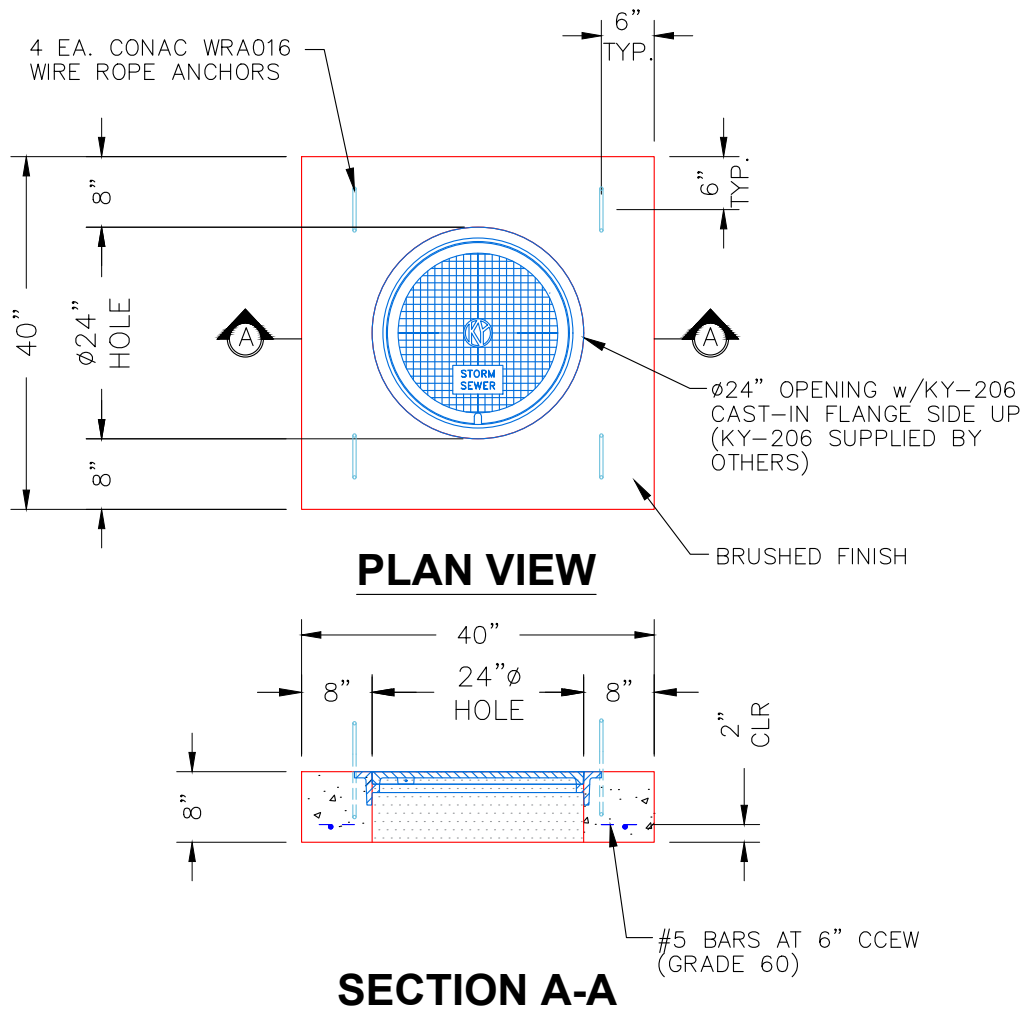

NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 770 lb
Volume (Net): 0.2cu.yd