| | | | |
|---|---|---|---|
| Job Name: 26-1635 - KYTC Oldham Co (261505)<br>Job Location: Peewee Valley, KY<br>Contractor: Cleary Construction, Inc. | Plant: 100<br>8/12/2026 11:09:12 AM | Tech: Jared - F<br>PC: T. Ryan | |

## Structure ID: 51133-131 DBI11

**P1 BX24300808VF** **BOX BASE 8inW, 8inF, Variable Ht F/n**

| | |
|---|---|
| P2) 24" x 30" - CASTING HEIGHT - 3.75" | 0 lb |
| P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht F/n - 41" | 4878 lb |
| 1) 24" x 30" - Conseal CS-102 1.00" | 0 lb |
| 1) Hole - 20 | 0 lb |
| Structure Total: | 4878 lb |

Structure Notes: .
**KYTC STATE PROJECT**
1. KYTC DBI TYPE 11 / ASTM C-913 SPEC'S.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING SUPPLIED BY OTHERS (HOE KY-460-11 F/G (DBI 11)).
.
REINFORCING PER ASTM A615 (GRADE 60).
- WALLS (As .31) #5 BARS AT 12" C.C.E.W..
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Rim: 794.09' Rim to Invert: 3.75' Slack: 0.25" Sump: 0" Step Position:

| Position | Elev | Angle | Ext. (cw) | Pipe | Pipe OD | Connector | Hole | Horz Size | Up (_) | Offset |
|---|---|---|---|---|---|---|---|---|---|---|
| Invert 1 | 790.34' | 0° | 20" | 15" CMP | 16" | Hole 20 | 20" | 20" | -2.5" | 0" |
| Invert 2 | | | | | | | | | | |
| Invert 3 | | | | | | | | | | |
| Invert 4 | | | | | | | | | | |
| Invert 5 | | | | | | | | | | |
| Invert 6 | | | | | | | | | | |
| Invert 7 | | | | | | | | | | |
| Invert 8 | | | | | | | | | | |

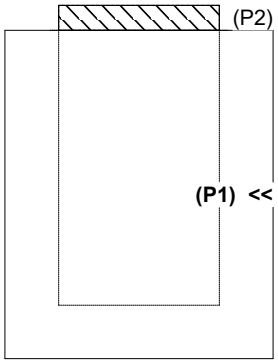


RIGHT-SIDE UP VIEW (int. dimensions)

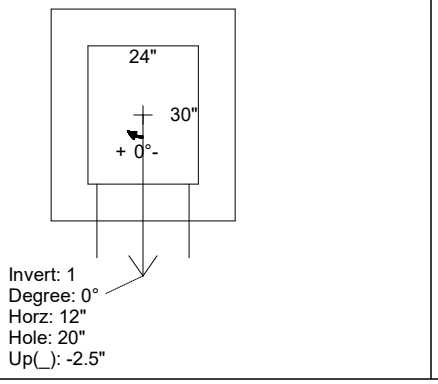


UPSIDE-DOWN VIEW (int. dimenions)

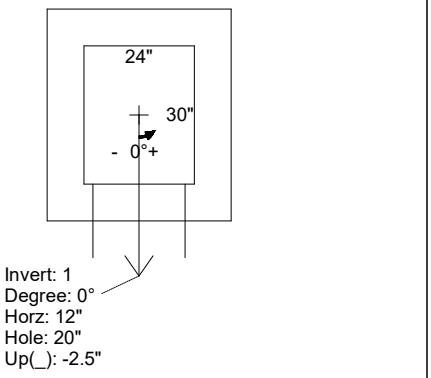


INSIDE WALL DIMENSIONS

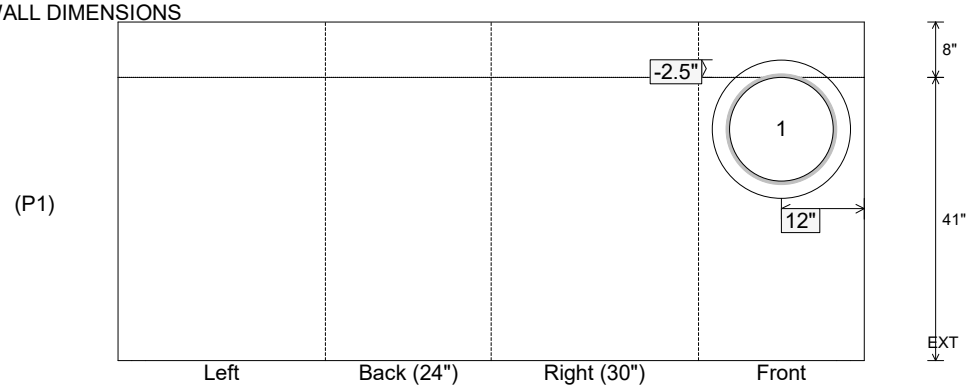


| | | | | |
|---|---|---|---|---|
| Coating (Int):<br>Coating (Ext): | Seam Up: Flat<br>Seam Dn: n/a | Wall Thickness: 8"<br>Floor Height: 8" | Height (Int): 41"<br>Height (Ext): 49" | Weight (Net): 4878 lb<br>Volume (Net): 1.25cu.yd |