

Job Name: 26-1644 - BGMU Miox Feed Lines	Plant: 100	Tech: Jared - F	
Job Location: Bowling Green, KY Contractor: Scott & Ritter, Inc.	3/31/2026 10:56:17 AM	PC: C. Goff	

**Structure ID: JB-2-2 ST-JB**

**P1 P.I.P. BY OTHERS - BTM SLAB**

P3) 72" - MH FLAT TOP w/ 36" CASTING CAST IN - 12"	4824 lb
P2) 72" - MH RISER - 66"	7403 lb
P1) 72" - P.I.P. BY OTHERS - BTM SLAB - 0"	0 lb
1) CASTING - PAMREX 36" F/C	393 lb
2) 72" - Conseal CS-102 1.00"	0 lb
1) 36" - Conseal CS-102 1.00"	0 lb
2) SQ. Hole - 48"x36.5"	0 lb
<b>Structure Total:</b>	<b>12620 lb</b>




Structure Notes:  
 1. PER ASTM C478 SPECIFICATIONS.  
 2. CONCRETE = 4,000 PSI AT 28 DAYS.  
 3. NO STEPS AND NO INVERT CHANNEL.  
 4. CASTING BY ICAST (PAMREX 36" F/C)

REINFORCING PER ASTM A615 (GRADE 60).  
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.  
 - RISER (As .18)

Rim: 473.38' Rim to Invert: 6.5' Slack: 0" Sump: 0" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (L)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

**RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimenions)**

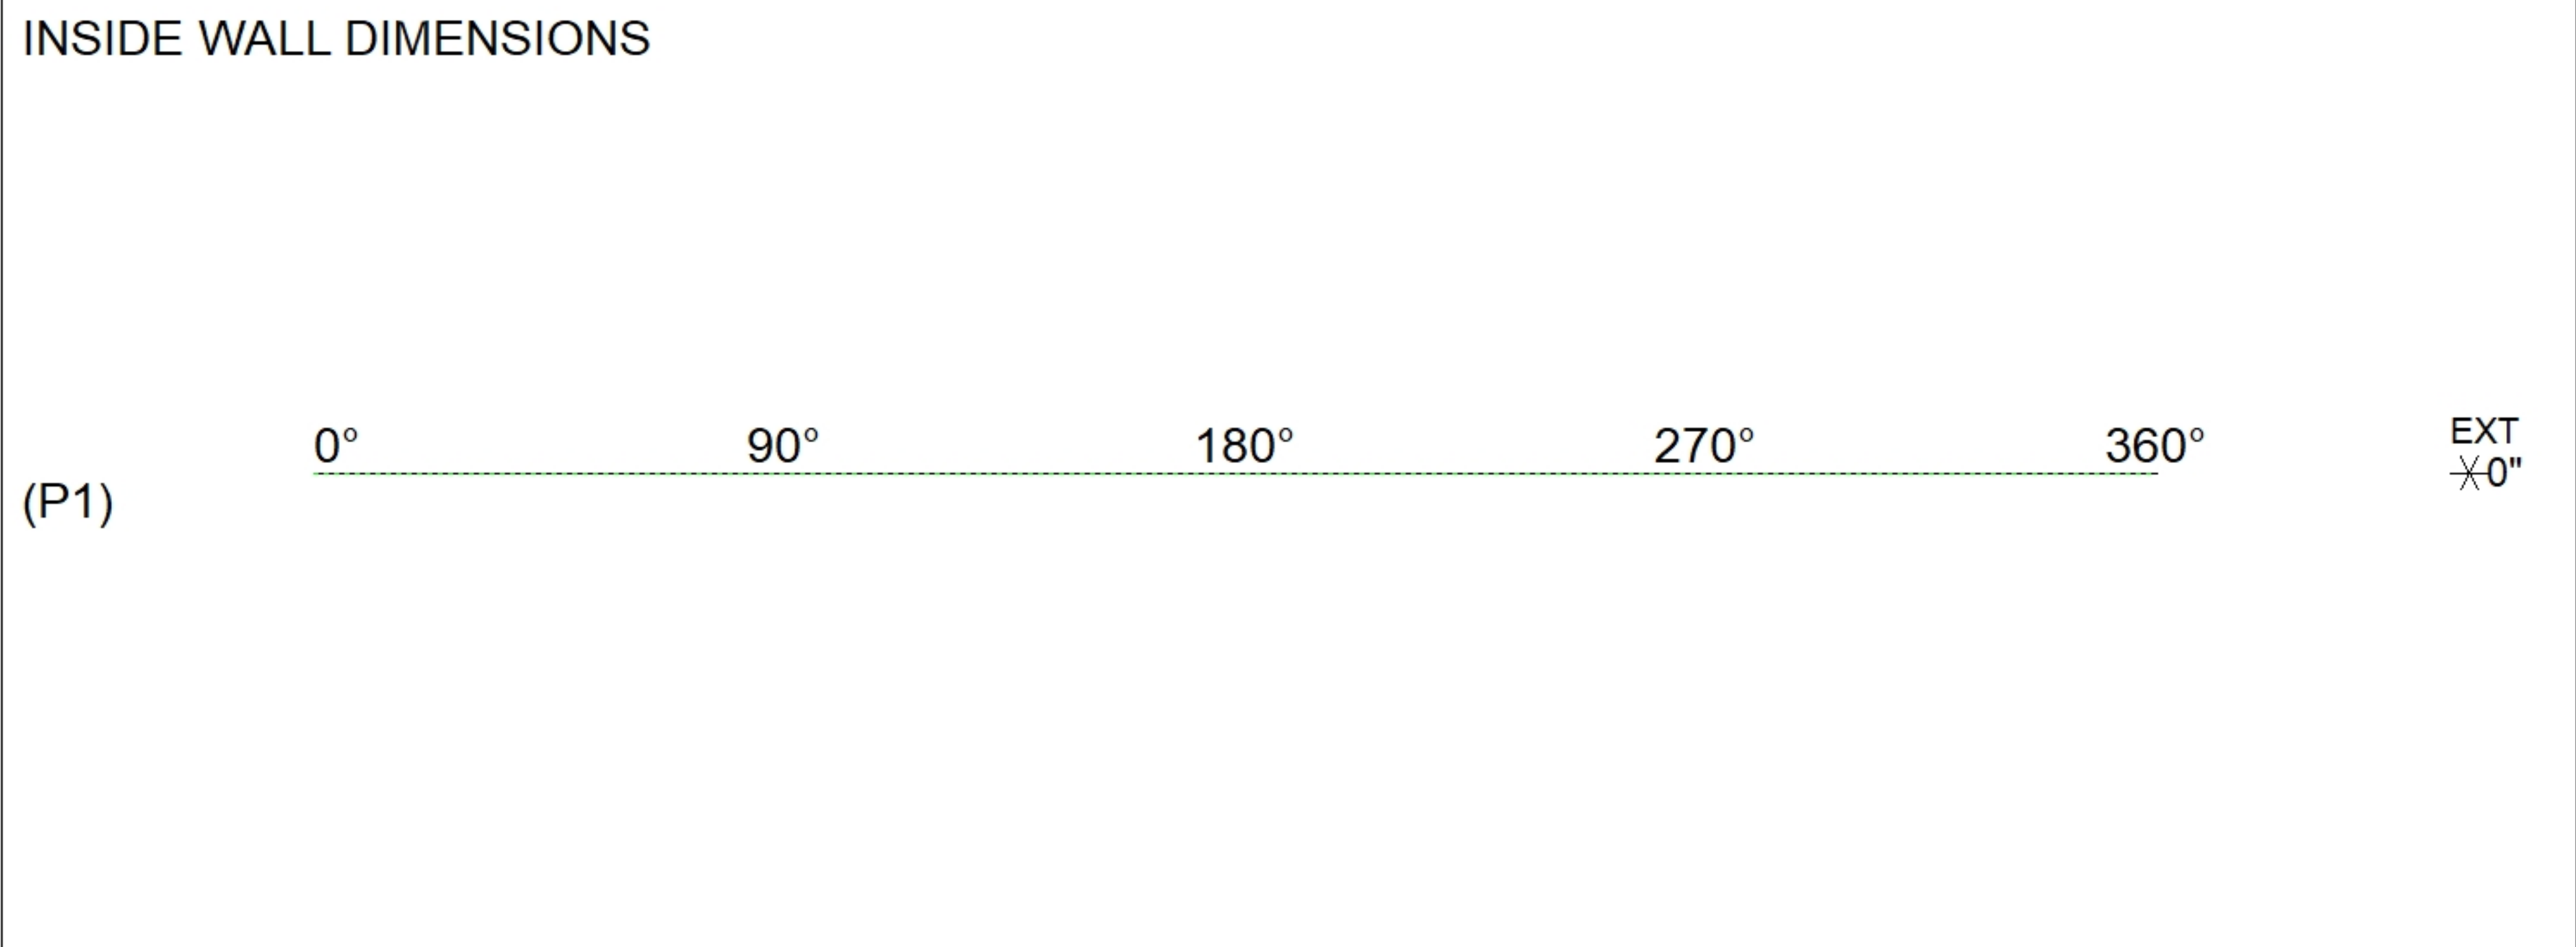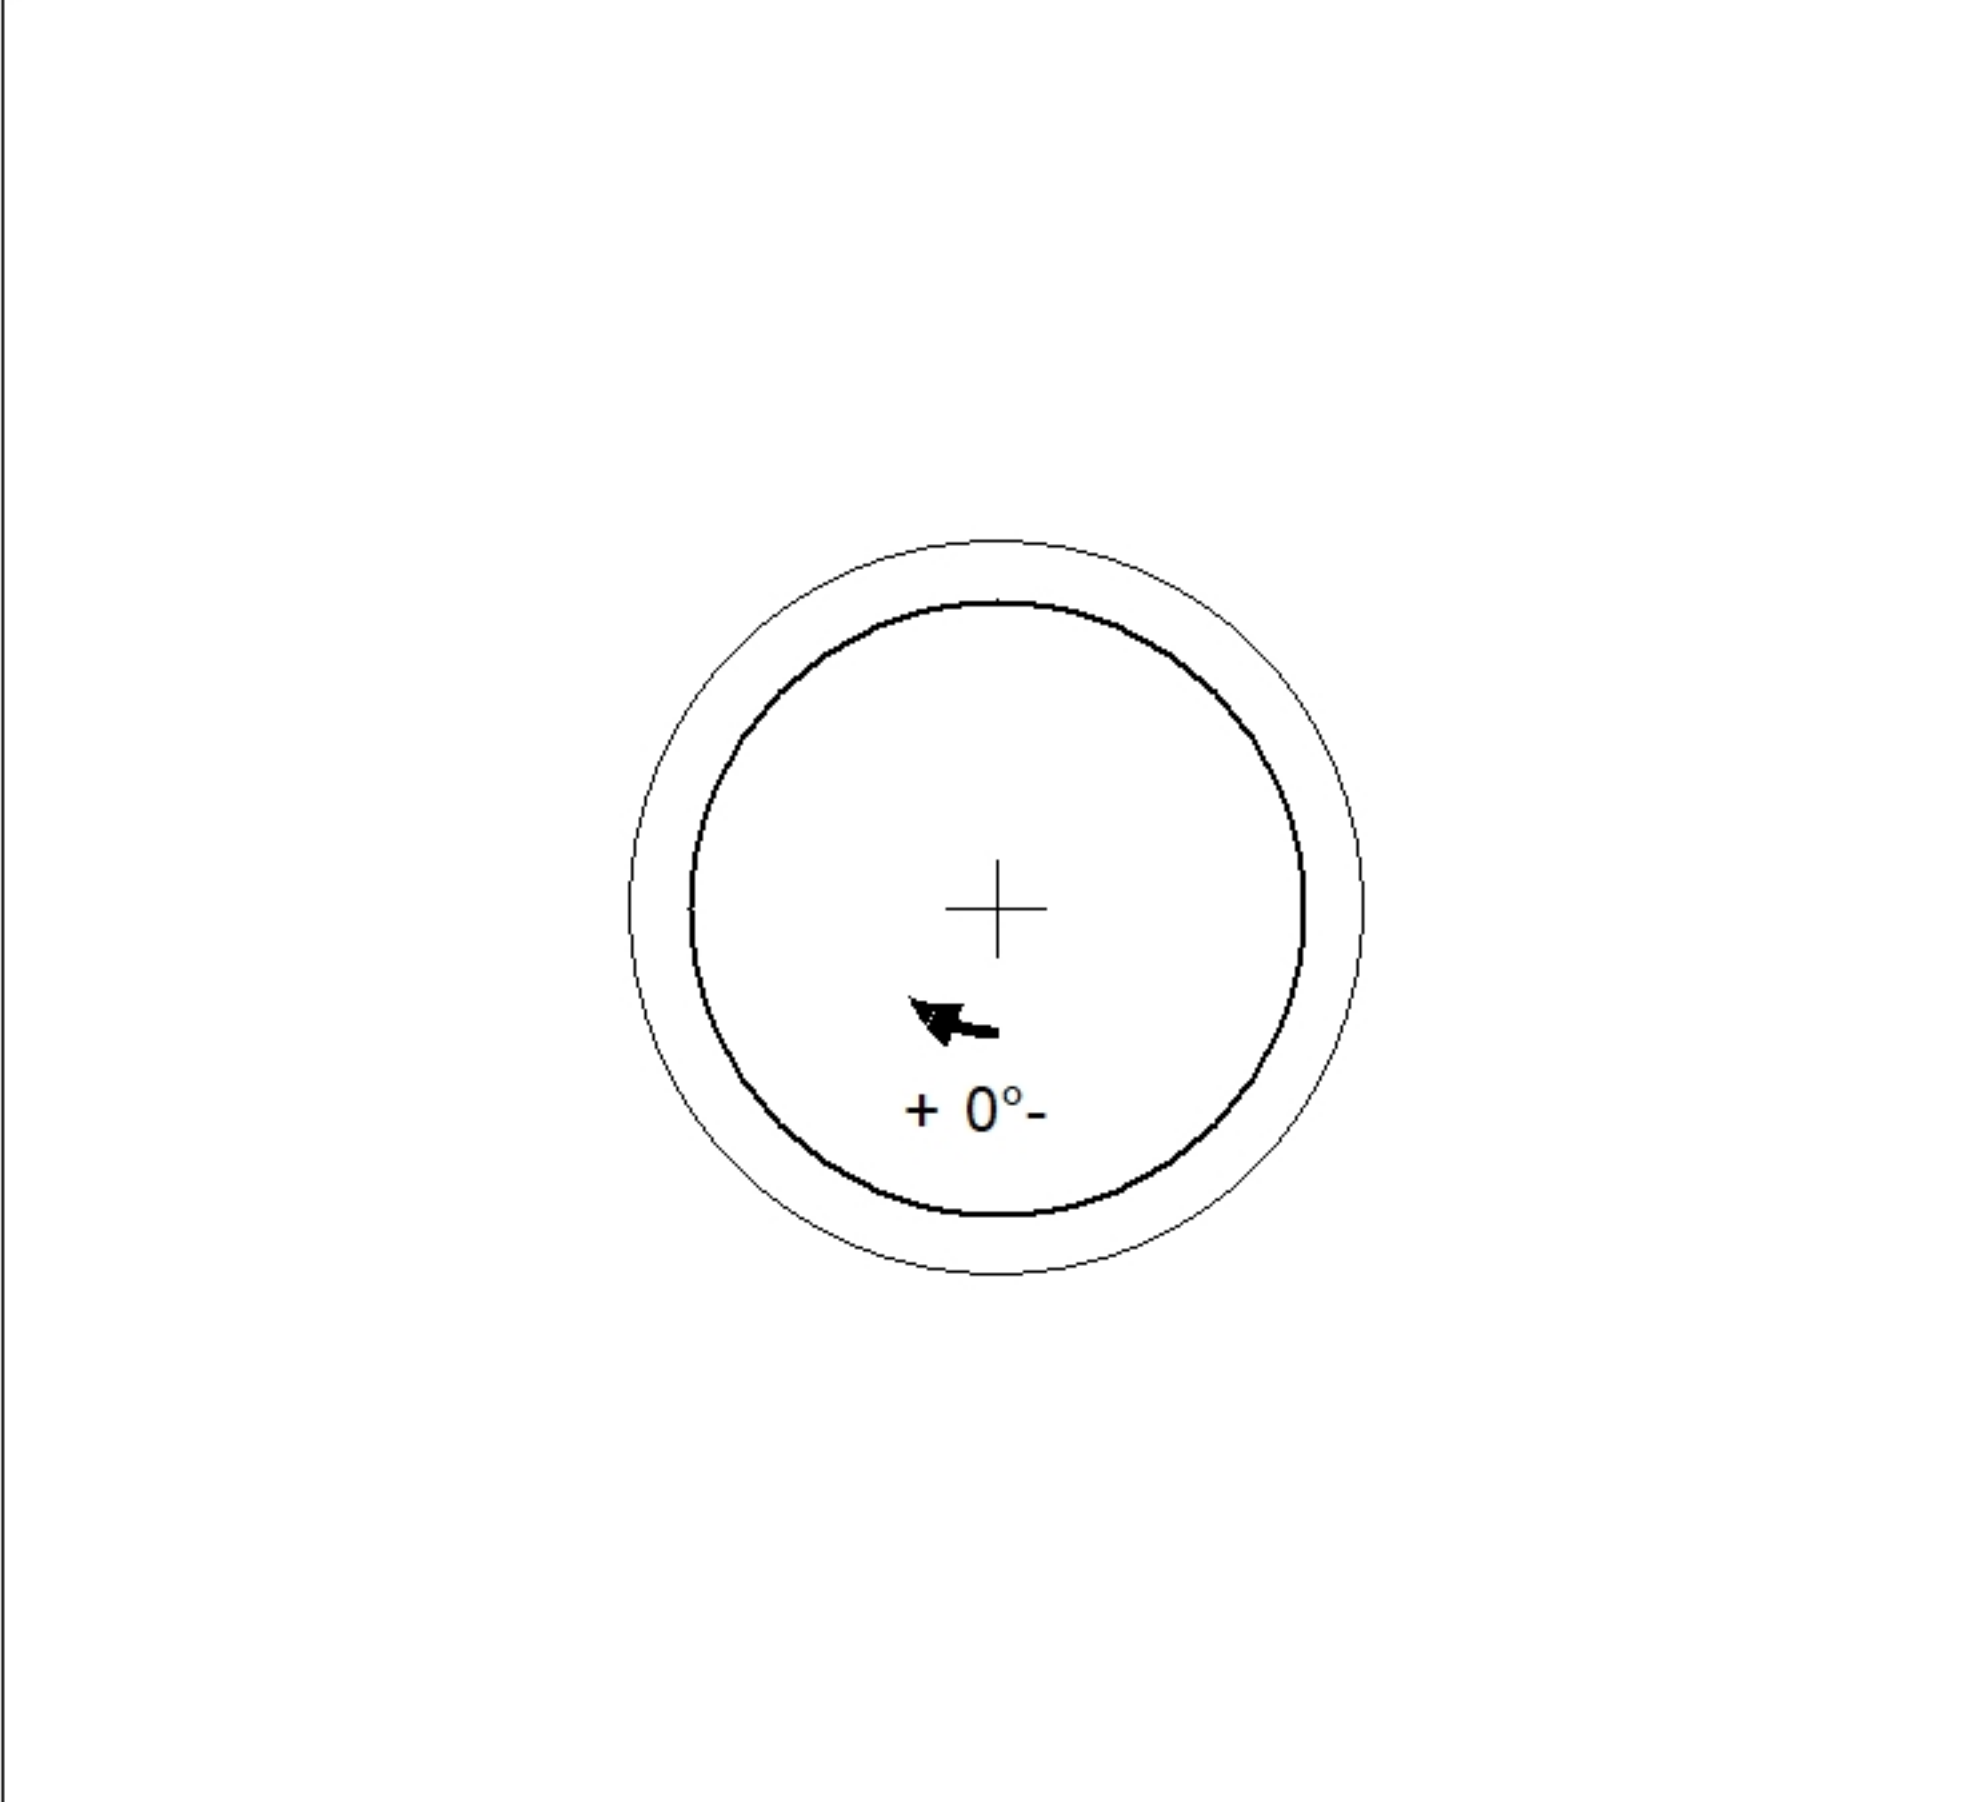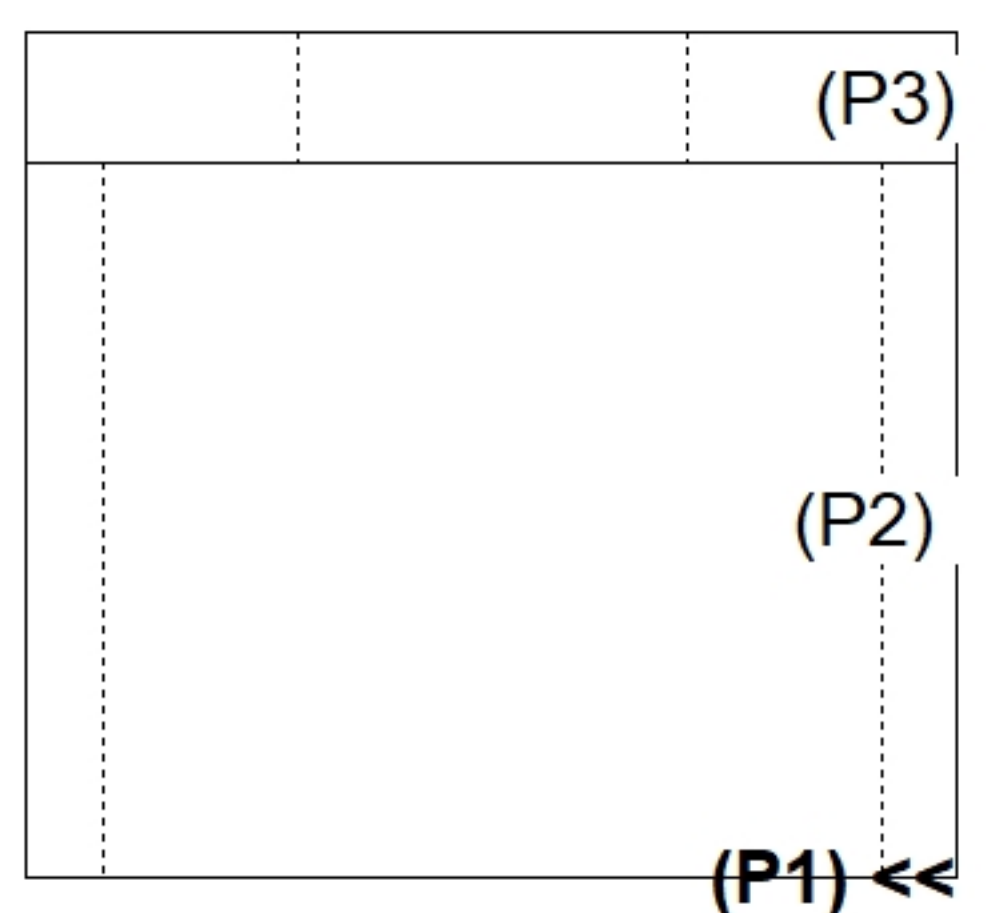

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 7" Floor Height: 0"	Height (Int): 0" Height (Ext): 0"	Weight (Net): 0 lb Volume (Net): 0cu.yd
----------------------------------	-------------------------------	--	--------------------------------------	--