




Job Name: 26-1733 - Liberty Power Station Job Location: Liberty, KY Contractor: Weddle Enterprises, Inc					Plant: 100 7/20/2026 2:23:21 PM		Tech: Jared - F PC: T. Ryan				
Structure ID: CB-28											
P1 MH048BAVF MH BASE Custom Ht											
P3) 24" - CASTING HEIGHT - 4" P2) 48" - MH FLAT TOP w/ 24" Center Hole - 7" P1) 48" - MH BASE Custom Ht - 34" 1) 48" - Conseal CS-102 1.00" 1) 24" - Conseal CS-102 1.00" 2) Hole - 26 1) Hole - 16 3) MH Step ML-10-TDS-NCR - 10"					0 lb 1700 lb 3153 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 4853 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING SUPPLIED BY OTHERS. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .18) - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.				
Rim: 1076' Rim to Invert: 3.81' Slack: 0.72' Sump: 0" Step Position: 90°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1	1072.19'	0°	0"	18" RCP B WALL	23"	Hole 26	26"	27.476"	-2.5"	0"	
Invert 2	1072.19'	180°	91.106"	18" RCP B WALL	23"	Hole 26	26"	27.476"	-2.5"	0"	
Invert 3	1073.43'	270°	136.659"	12" HDPE	14.5"	Hole 16	16"	16.312"	13.63"	0"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											




RIGHT-SIDE UP VIEW (int. dimensions)

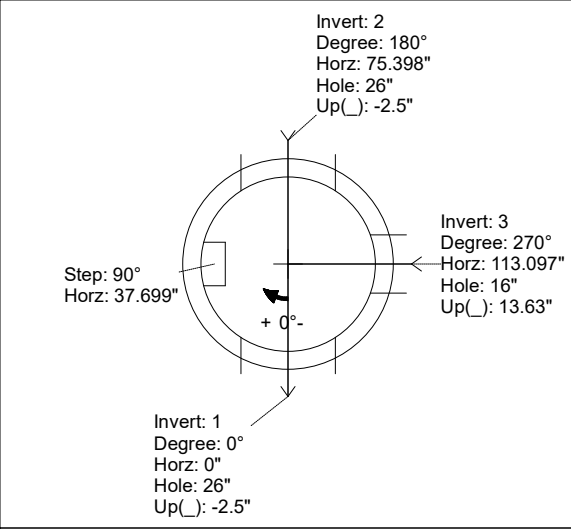

UPSIDE-DOWN VIEW (int. dimensions)

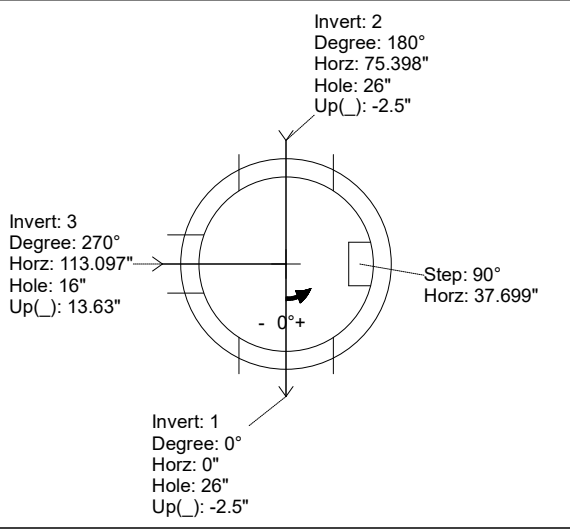

INSIDE WALL DIMENSIONS

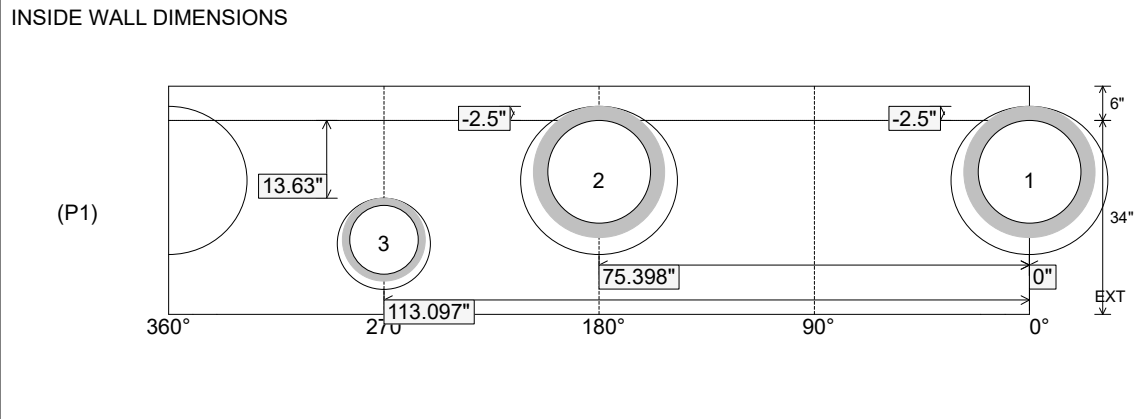

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 34" Height (Ext): 40"	Weight (Net): 3153 lb Volume (Net): 0.8cu.yd
----------------------------------	-------------------------------	--	--	---