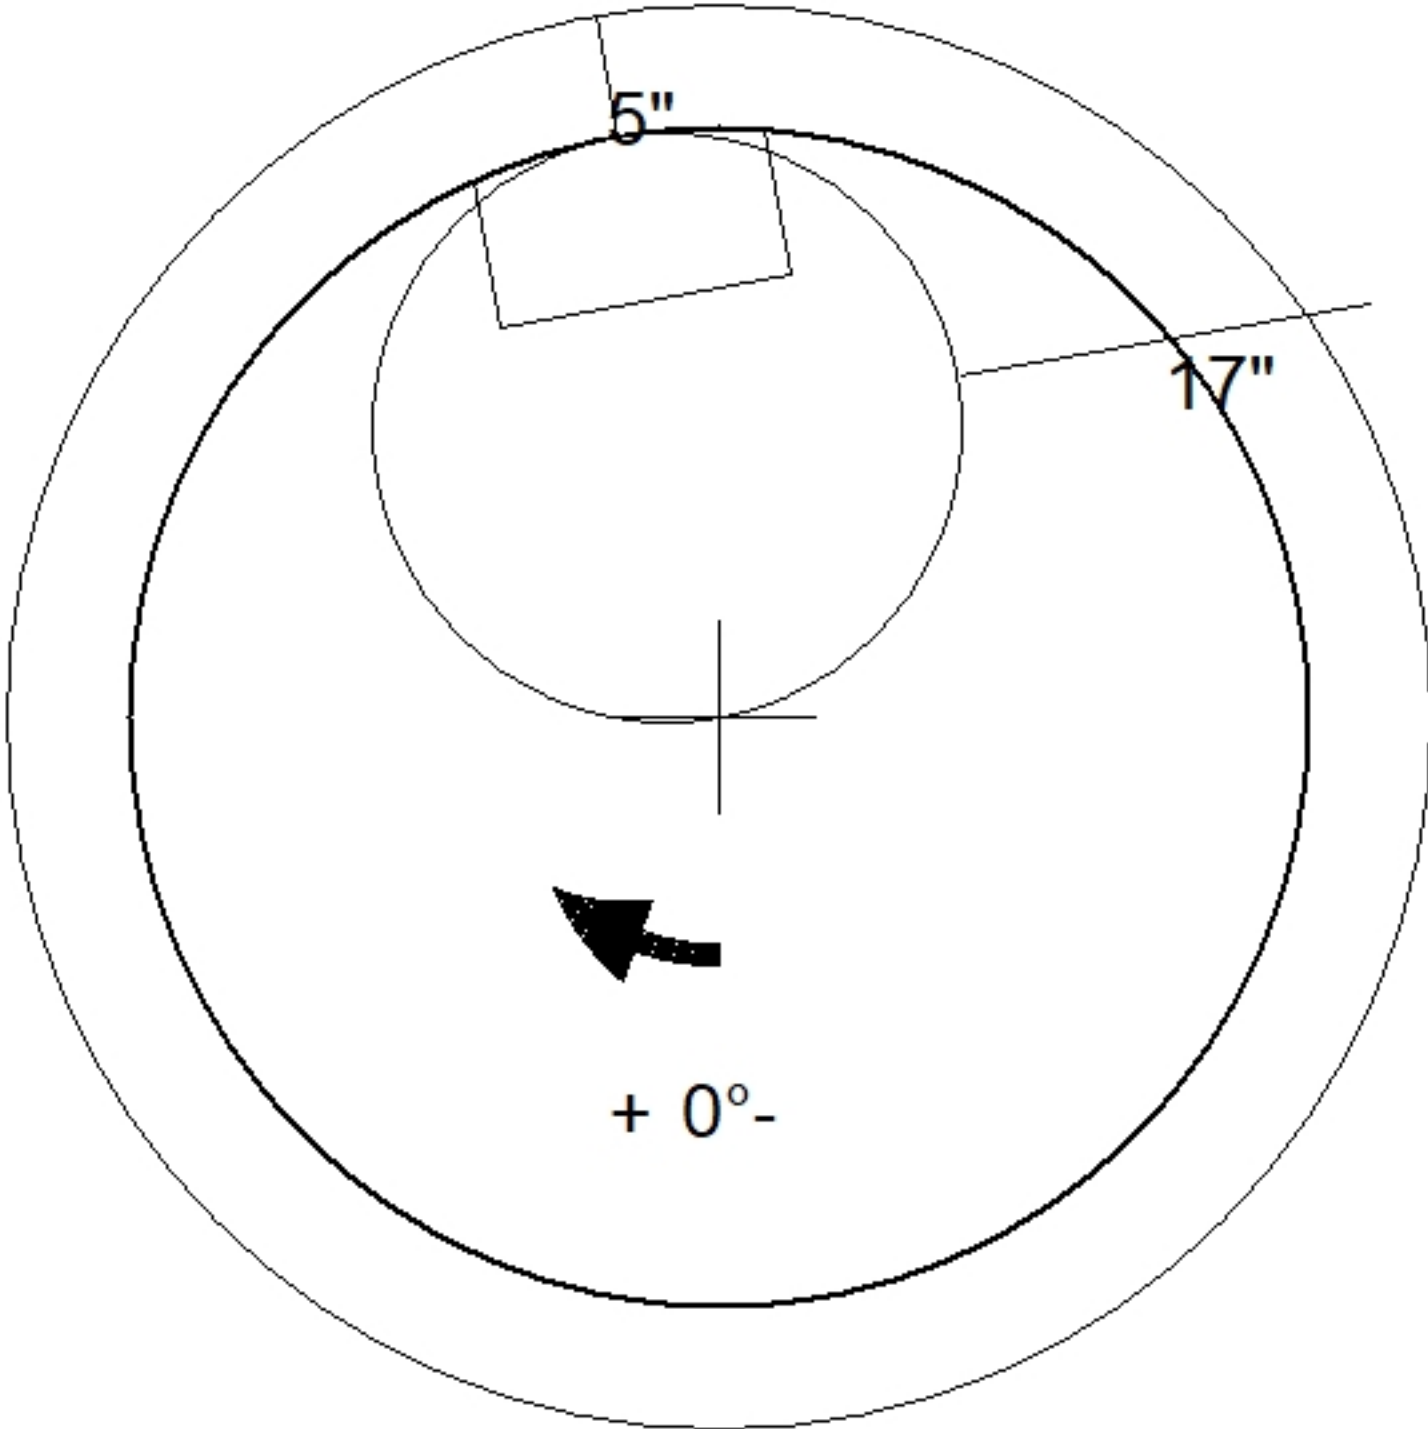
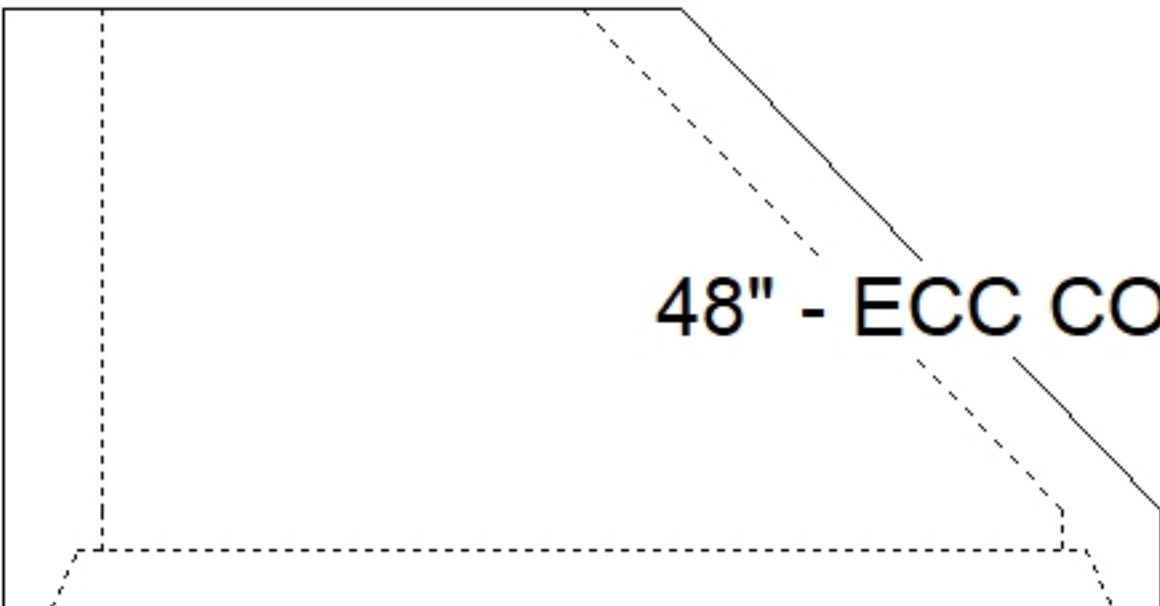


Job Name: 26-1787 - Kroger Expansion Job Location: Murray, KY Contractor: Parker Excavating, LLC.		Plant: 100 7/22/2026 3:26:53 PM	Tech: J. Horsley PC: J. Jarvis	
Structure ID: C4 ST-MH				
P3 MH048CN30		ECC CONE w/ 24" HOLE F/G		
P4) 24" - CASTING HEIGHT - 6.50" P3) 48" - ECC CONE w/ 24" HOLE F/G - 30" P2) 48" - MH RISER SPECIAL T/G - 48" P1) 48" - MH BASE T/n - 72" 1) CASTING - JBS 1020 F/C DRAIN 2) 48" - Conseal CS-102 1.00" 1) Hole - 24 1) Hole - 18 1) Hole - 20 1) Hole - 10 13) MH Step ML-10-TDS-NCR - 10"		0 lb 2050 lb 3320 lb 5919 lb 361 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 11650 lb Structure Total:	Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (JBS 1020 F/C). . REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.	
				
 48" - ECC CONE w/ 24" HOLE F/G - 30" - (P3)				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 30"	Weight (Net): 2050 lb Volume (Net): 0.41cu.yd