

Job Name: 26-1787 - Kroger Expansion
Job Location: Murray, KY
Contractor: Parker Excavating, LLC.

Plant: 100

7/22/2026 3:26:55 PM

Tech: J. Horsley

PC: J. Jarvis



Structure ID: C6 ST-CI

P2 MH060LD08SP

MH FLAT TOP w/30"x36" Hole F/F

- P4) 6" x 36" - CASTING - Curb Back/Hood - 3.50"
P3) 30" x 36" - CASTING - Frame&Grate F/F - 6.50"
P2) 60" - MH FLAT TOP w/30"x36" Hole F/F - 8"
P1) 60" - MH BASE Custom Ht F/n - 59"
1) CASTING - JBS 2064-V SET (F/G/H)
1) 60" - Conseal CS-102 1.00"
1) Hole - 20
4) Hole - 6
5) MH Step ML-10-TDS-NCR - 10"

0 lb
0 lb
2008 lb
8675 lb
500 lb
0 lb
0 lb
0 lb
0 lb


Structure Total: 11183 lb

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY ICAST (JBS 2064 F/G/H).

REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- RISER/WALLS (As .18)
- FLOOR (As .37) #5 BARS AT 10" C.C.E.W.

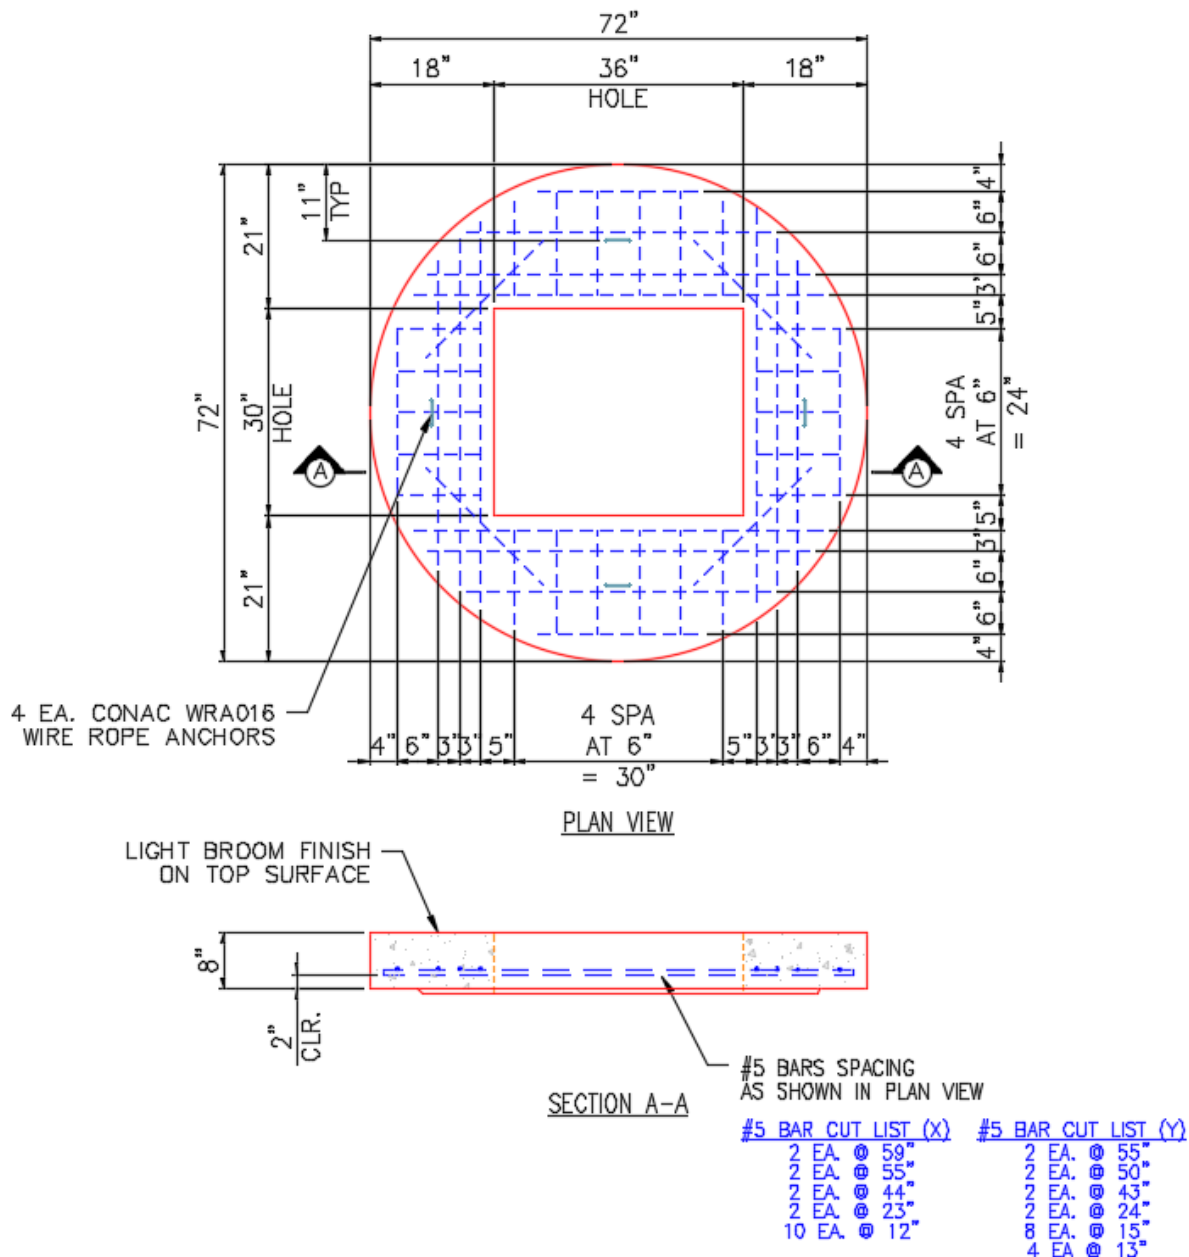

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 6"

Height (Ext): 8"

Weight (Net): 2008 lb
Volume (Net): 0.51cu.yd