

Job Name: 26-1787 - Kroger Expansion  
Job Location: Murray, KY  
Contractor: Parker Excavating, LLC.

Plant: 100

7/22/2026 3:26:57 PM

Tech: J. Horsley

PC: J. Jarvis



## Structure ID: C8 ST-CI

### P2 MH048LD07S



### MH FLAT TOP w/30"x30" Hole F/F

- P3) 30" x 30" - CASTING HEIGHT - 6"  
P2) 48" - MH FLAT TOP w/30"x30" Hole F/F - 7"  
P1) 48" - MH BASE Custom Ht F/n - 40"  
1) CASTING - JBS 4310 F/G  
1) 48" - Conseal CS-102 1.00"  
2) Hole - 30  
3) Hole - 6  
3) MH Step ML-10-TDS-NCR - 10"

Structure Total: 5221 lb

#### Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
  2. CONCRETE = 4,000 PSI AT 28 DAYS.
  3. CASTING BY ICAST (JBS 4310 F/G).
- REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
  - RISER/WALLS (As .12)
  - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

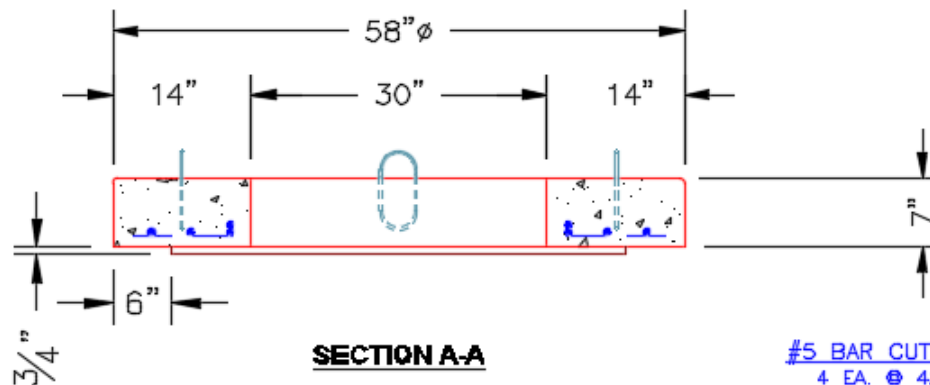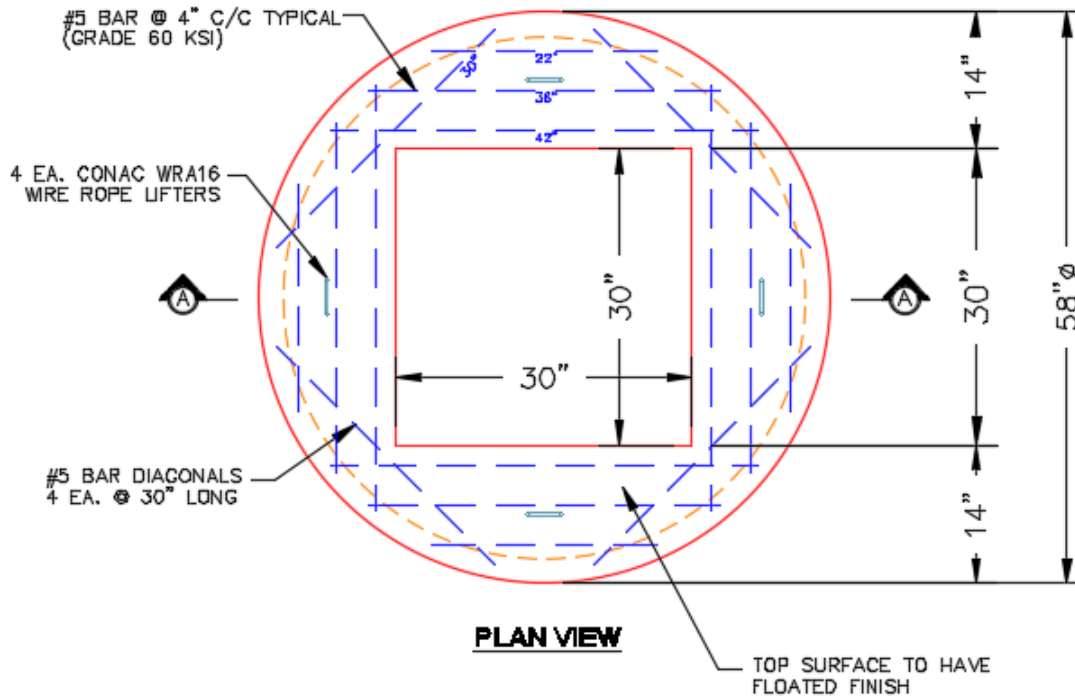

#### #5 BAR CUT LIST

- 4 EA. @ 42"
- 4 EA. @ 36"
- 4 EA. @ 30"
- 4 EA. @ 22"

Coating (Int):  
Coating (Ext):

Seam Up: Flat  
Seam Dn: Flat

Wall Thickness: 5"

Height (Ext): 7"

Weight (Net): 1264 lb  
Volume (Net): 0.31cu.yd