Job Name: 26-1789 - Tractor Supply Drainage Repairs Job Location: Woodbury, TN Contractor: Hayes Pipe Supply	Plant: 100 4/10/2026 8:11:41 PM	Tech: Jared - F PC: E. Bradley	

Structure ID: JB1 ST-JB

P2 BX036096-08LD08S — **BX FLAT LID 8inW w/24" HOLE F/F**

P3) 24" - CASTING HEIGHT - 7"	0 lb
P2) 36" x 96" - BX FLAT LID 8inW w/24" HOLE F/F - 8"	3606 lb
P1) 36" x 96" - BOX BASE 8inW, 8inF, Variable Ht F/n - 80"	17509 lb
1) 36" x 96" - Conseal CS-102 1.00"	0 lb
2) Hole - 40 x 28	0 lb
1) Hole - 46	0 lb
6) MH Step ML-10-TDS-NCR - 10"	
Structure Total:	21115 lb

Structure Notes:
1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. CASTING SUPPLIED BY OTHERS (JBS 1150 F/C STORM).

REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- WALLS (As .12) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

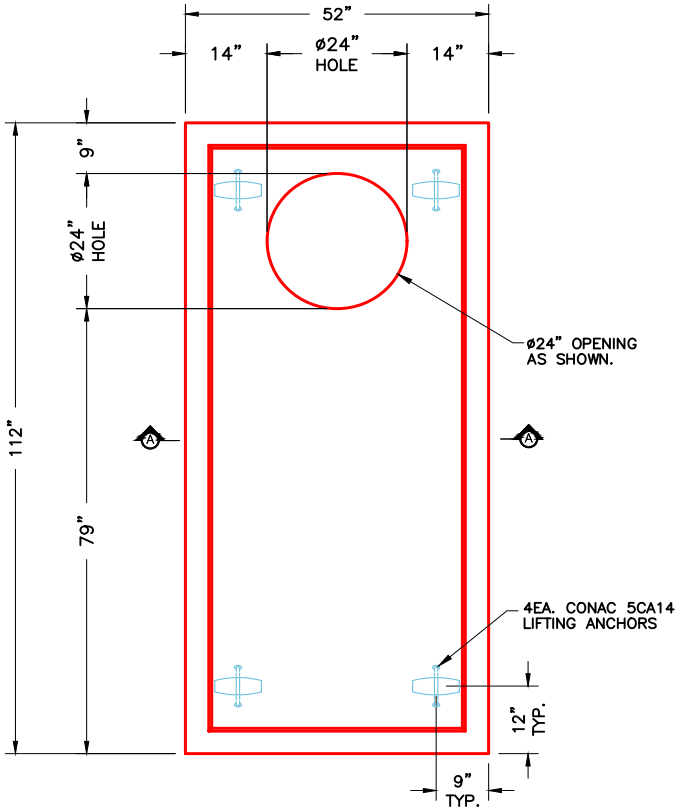

PLAN VIEW

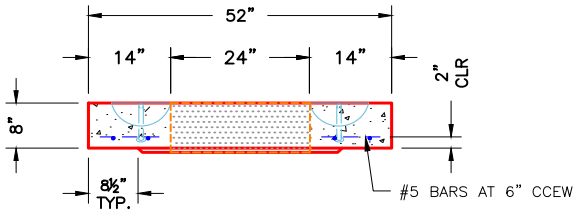

SECTION A-A

NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 8"	Height (Ext): 8"	Weight (Net): 3606 lb Volume (Net): 0.92cu.yd