

Job Name: 26-1800 - Georgetown Community Park
Job Location: Georgetown, IN
Contractor: Song Construction

Plant: 100

7/24/2026 12:15:25 PM

Tech: Jared - A

PC: Jay Ross Jarvis



Structure ID: DI 1 ST-DCI

P1 BX2436-08BA42

BOX BASE 8inW, 8inF

- P2) 24" x 36" - CASTING HEIGHT - 6"
P1) 24" x 36" - BOX BASE 8inW, 8inF - 42"
1) CASTING - HOE 470 SET (F/G/H)
1) 24" x 36" - Conseal CS-102 1.00"
1) Hole - 18"

Structure Total: 5833 lb



- Structure Notes:**
1. HOE 470 SET (F/G/H) PROVIDED BY ICAST.
 2. PER ASTM C913 SPECIFICATIONS.
 3. CONCRETE = 4,000 PSI AT 28 DAYS.
 4. NO INVERT CHANNEL.
 5. REINFORCING PER ASTM A615 (GRADE 60).
- WALLS (As .12) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

Rim: 697.27' Rim to Invert: 4' Slack: 1.25" Sump: 1.25" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	693.27'	310°	50.614"	12" HDPE	14.5"	Hole 18	18"	11.847", 13.884"	0"	6"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

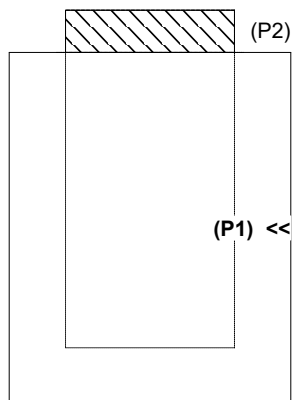

Invert: 1
Degree: 310°
Horz: 35.902"
Hole: 18"
Up(): 0"

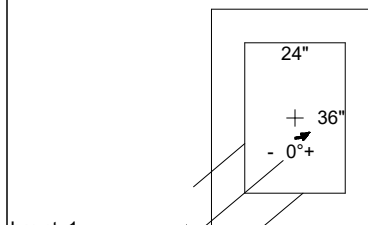

Invert: 1
Degree: 310°
Horz: 35.902"
Hole: 18"
Up(): 0"

INSIDE WALL DIMENSIONS



(P1)

35.902"

Left

Back (24")

Right (36")

Front

8"
42"
EXT

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: n/a

Wall Thickness: 8"
Floor Height: 8"

Height (Int): 42"
Height (Ext): 50"

Weight (Net): 5439 lb
Volume (Net): 1.39cu.yd